**2022 PRODUCT CATALOG**

SENCO®

80%

OVER 80% OF THE FASTENERS WE SELL ARE MANUFACTURED IN **CINCINNATI**

- Steel rod purchased from US manfacturers
- Rod drawn down to exact wire gauge sizes

- ICC Certified Facility
- Clean wire process

- Each box date stamped for Quality Assurance
- All precision forming dies made in house

SENCO®

TABLE OF CONTENTS

See all tools at a glance in the foldout located on pages 88–90

DURASPIN™

PRODUCTIVITY REDEFINED

DuraSpin® screw systems help you get the job done up to four times faster than bulk screwdrivers and loose screws, improving jobsite productivity by more than 30%.

APPLICATIONS

Our full line of integrated tools, attachments, kits, and accessories can tackle almost any job including drywall, sub-flooring, decking, metal framing, and a variety of commercial and industrial applications. For projects with tough requirements, our wide selection of ICC and Miami-Dade certified screws will keep your job on target. Check out our next generation of DuraSpin® auto-feed screw systems with enhanced features that redefine productivity and help you get the job done faster and easier.

KEY FEATURES

• Patented corner-fit feed system for better screw placement in tight spaces and corners
• Locking depth-of-drive adjustment
• Tool-free adjustable nosepiece
• Easily load 50 screws in less than a second
• Trigger lock for continuous operation
• Long-lasting drive bits with quick-slide release
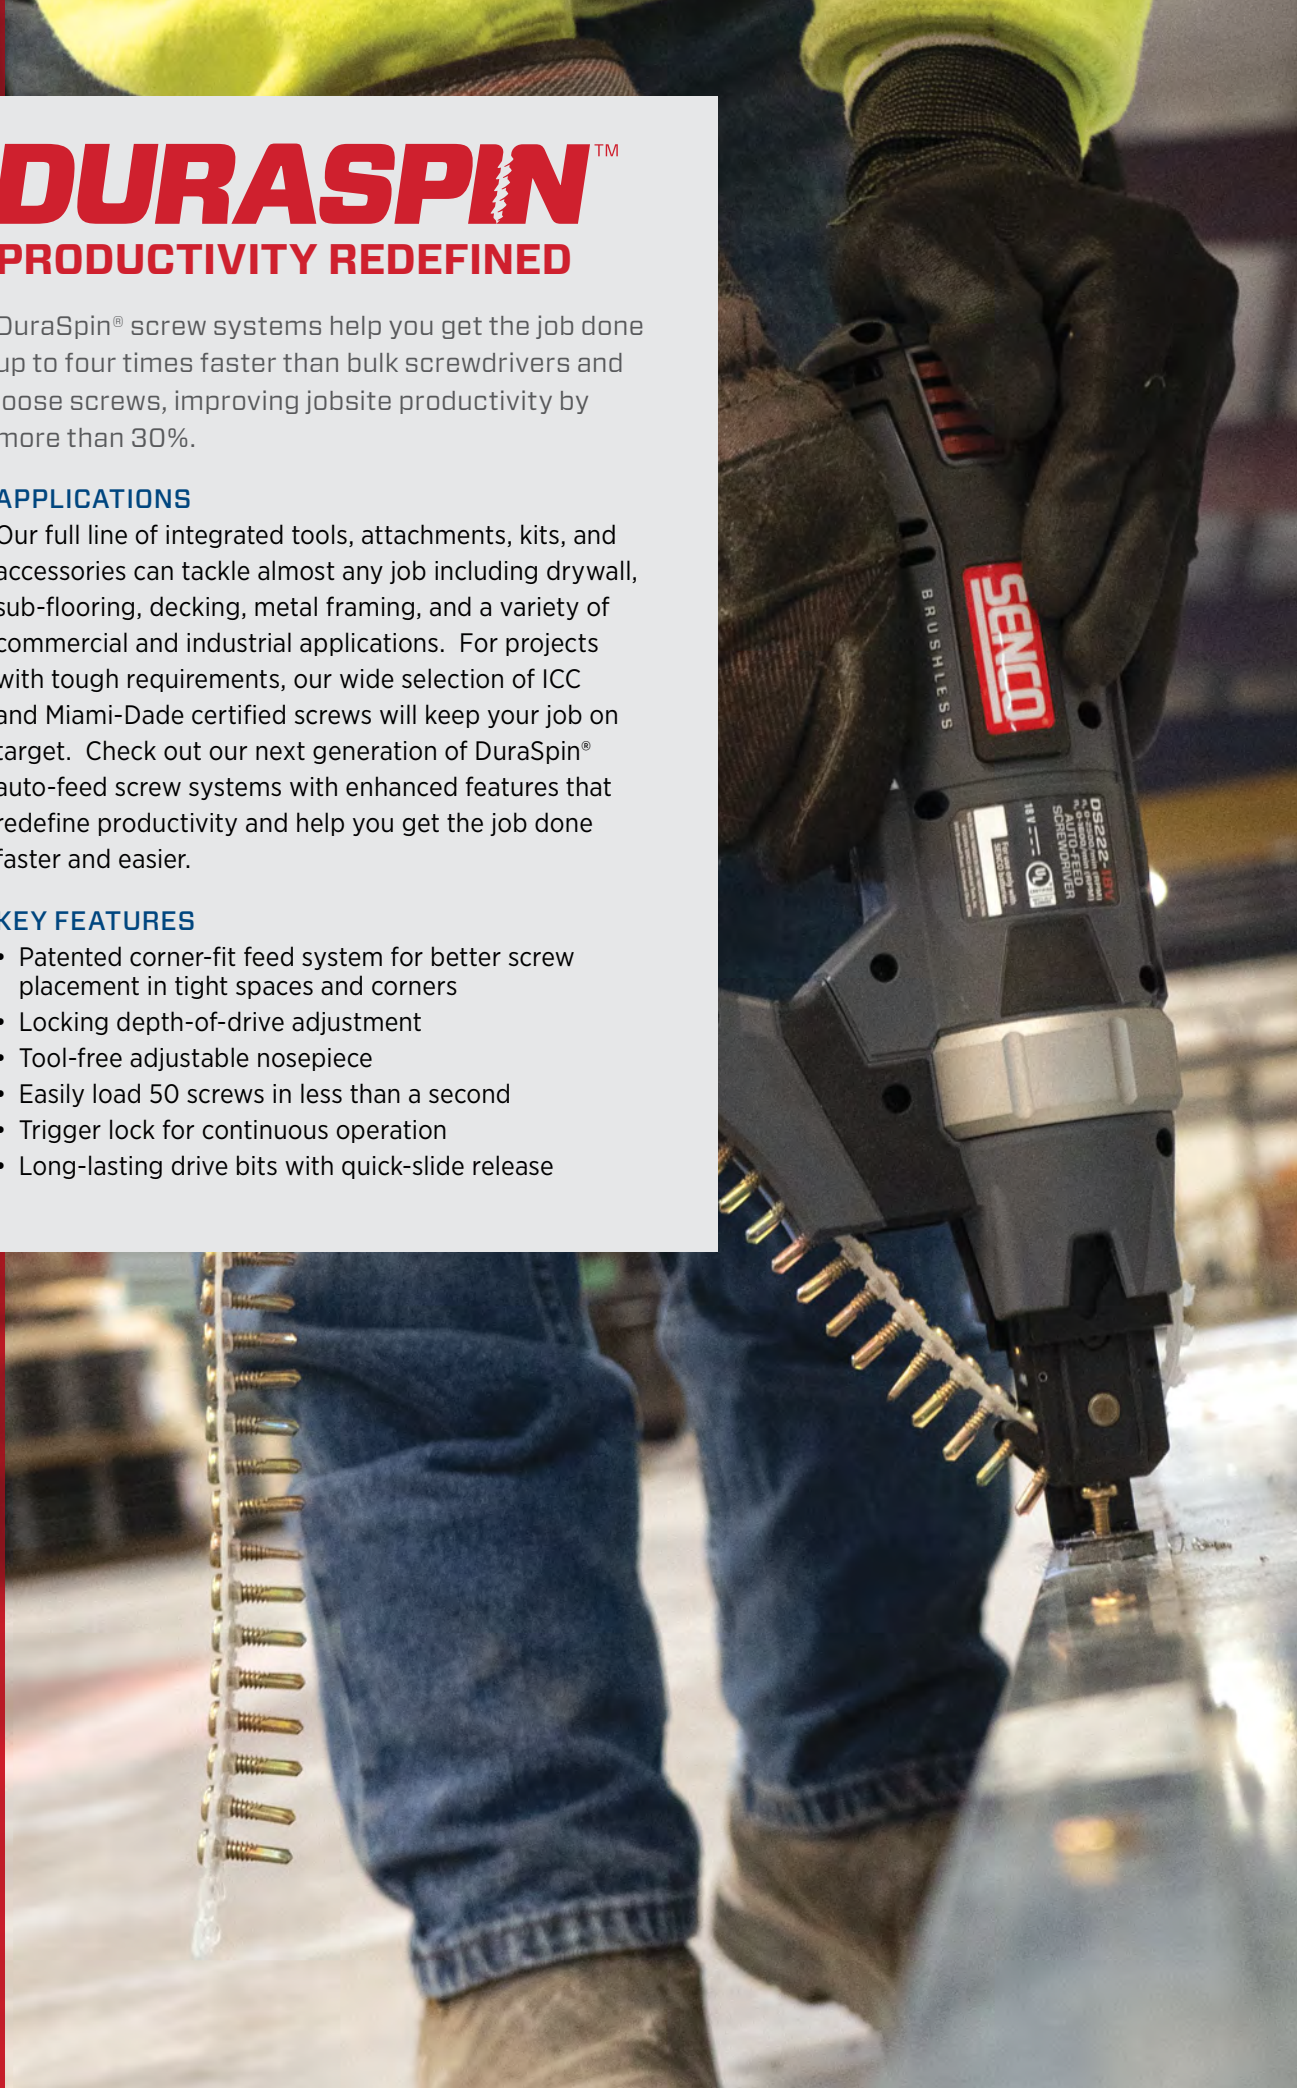
DS225-18V
2" CORDLESS 18V LI-ION 5000 RPM

ITEM #10A0001N

5000 RPM/TPM

BRUSHLESS MOTOR

2 bits included

Features
- High-speed, efficient brushless motor designed for drywall applications
- Features feed on return - the next screw is aligned with the bit for better line of sight and more accurate screw placement
- Patented corner fit technology
- Includes 2 bits, 2 extended life batteries, quick charge battery charger and storage bag

PRIMARY APPLICATIONS
High Speed Applications Including Drywall to Wood or Light Steel

SECONDARY APPLICATIONS
Subfloor, Sheathing, Cement Board, Underlayment

DS222-18V
2" CORDLESS 18V LI-ION 2500 RPM

ITEM #10B0001N

2500 RPM/TPM

BRUSHLESS MOTOR

2 bits included

Features
- Selectable 2500/1600 RPM efficient brushless motor
- Features feed on return - the next screw is aligned with the bit for better line of sight and more accurate screw placement
- Patented corner fit technology
- Includes 2 bits, 2 extended life batteries, quick charge battery charger and storage bag

PRIMARY APPLICATIONS
High Torque Applications Including Metal Framing/Decking

SECONDARY APPLICATIONS
Crating, Gypsum/Sheathing to Steel, Decking, Subfloor

DS322-18V
3" CORDLESS 18V LI-ION 2500 RPM

ITEM #10C0001N

2500 RPM/TPM

BRUSHLESS MOTOR

2 bits included

Features
- Selectable 2500/1600 RPM efficient brushless motor
- Toe nailing nosepiece
- Variable speed selector for heavy steel
- Features feed on return - the next screw is aligned with the bit for better line of sight and more accurate screw placement
- Includes 2 bits, 2 extended life batteries, quick charge battery charger and storage bag

PRIMARY APPLICATIONS
General Applications Including Wood Decking, Tile Roofing, Crating

SECONDARY APPLICATIONS
Decking, Docks, Crating, Gypsum/Sheathing to Steel, Tile Roofing

DURASPIN™ Auto-Feed Cordless Screwdrivers
Productivity Redefined
- Patented corner-fit feed system
- Detachable feed system to expose bit for quick reversing
- Precise depth of drive adjustment with depth lock
- Quick slide button bit change
- Universal toe-nailing nosepiece
- Powered by 18V Li-Ion extended life batteries
- Quick charge battery charger
- Tool-free screw length adustment
- Variable speed trigger with lock and reverse
- Adjustable belt hook

3

Product Reference Chart

TOOL SPECS	DS225-18V	DS222-18V	DS322-18V
Speed (RPM)	0–5000	0–1600, 0–2500 (Selectable)	0–1600, 0–2500 (Selectable)
Voltage	18V	18V	18V
Weight w/ Battery	5.1 lbs (2.3 kg)	5.3 lbs (2.4 kg)	5.4 lbs (2.5 kg)
Height	9.6" (244 mm)	9.6" (244 mm)	9.6" (244 mm)
Length	13.7" (348 mm)	13.7" (348 mm)	14.5" (368 mm)
Width	3.4" (86.4 mm)	3.4" (86.4 mm)	3.4" (86.4 mm)
Warranty	5 yr	5 yr	5 yr
FASTENER SPECS	Collated screws are located on pages 8–11		
Range	1"–2"*	1"–2"*	1"–3"
Shank Diameter	#6 - #8	#6 - #12	#6 - #12
TOOL FEATURES			
Depth-of-Drive	Yes	Yes	Yes
Reversible Belt Hook	Yes	Yes	Yes
Trigger	Variable with Lock	Variable with Lock	Variable with Lock
Power Type	Cordless	Cordless	Cordless
Reversible	Yes	Yes	Yes

* ½" – 2" with nosepiece sold separately, part #FC0822

DS245-AC
2″ CORDED 5000 RPM

ITEM #10D0001N

5000 RPM/TPM

2 bits included

Features
- High-speed motor designed for drywall applications
- Corner-fit feed system
- Feed on return
- Includes 2 bits and carrying bag

PRIMARY APPLICATIONS

Drywall to Wood, Drywall to Light Steel, Underlayment, Cement Board

SECONDARY APPLICATIONS

Subfloor, Wood Decking

DS242-AC
2″ CORDED 2500 RPM

ITEM #10E0001N

2500 RPM/TPM

2 bits included

Features
- High-torque motor for driving into dense material
- Corner-fit feed system
- Feed on return
- Includes 2 bits and carrying bag

PRIMARY APPLICATIONS

Metal Framing, Cement Board

SECONDARY APPLICATIONS

Drywall to Wood, Drywall to Steel, Subfloor, Underlayment, Wood Decking, Composite Decking

DS342-AC
3″ CORDED 2500 RPM

ITEM #10F0001N

2500 RPM/TPM

2 bits included

Features
- High-torque motor for driving into dense material
- Corner-fit feed system
- Feed on return
- Includes 2 bits and carrying bag

PRIMARY APPLICATIONS

Wood Decking, Composite Decking, Sheathing to Steel

SECONDARY APPLICATIONS

Drywall to Wood, Drywall to Steel, Subfloor, Underlayment, Metal Framing, Cement Board

DURASPIN™ Auto-Feed Corded Screwdrivers
Productivity Redefined

- Patented corner-fit feed system
- Precise depth of drive adjustment with depth lock
- Quick slide button bit change
- Universal toe-nailing nosepiece
- Tool-free screw length adjustment
- Variable speed trigger with lock and reverse
- Screw-strip guide
- Adjustable belt hook
- Heavy duty 10' power cord

4

Product Reference Chart

TOOL SPECS	DS245-AC	DS242-AC	DS342-AC
Speed (RPM)	0–5000	0–2500	0–2500
Current (Amps)	6.0	6.0	6.0
Voltage	120V/60Hz	120V/60Hz	120V/60Hz
Weight	5.5 lbs (2.5 kg)	5.7 lbs (2.6 kg)	6.7 lbs (3.0 kg)
Height	9.7″ (246 mm)	9.7″ (246 mm)	9.7″ (246 mm)
Length	16.3″ (417 mm)	16.4″ (417 mm)	17.2″ (437 mm)
Width	3.2″ (81 mm)	3.2″ (81 mm)	3.2″ (81 mm)
Warranty	5 yr	5 yr	5 yr
FASTENER SPECS	Collated screws are located on pages 8–11		
Range	1″–2″*	1″–2″*	1″–3″
Shank Diameter	#6 - #10	#6 - #12	#6 - #12
TOOL FEATURES			
Depth-of-Drive	Yes	Yes	Yes
Reversible Belt Hook	Yes	Yes	Yes
Trigger	Variable with Lock	Variable with Lock	Variable with Lock
Power Type	Corded	Corded	Corded
Reversible	Yes	Yes	Yes

* ½″ – 2″ with nosepiece sold separately, part #FC0822

DS230-S1
2" AUTO-FEED SCREWDRIVER ATTACHMENT

ITEM # #9Z0001N

2 bits included

COMPATIBLE WITH:
SENCO® SELECT MODELS

For SENCO Models:
- SG2510
- SG4100

PRIMARY APPLICATIONS
Drywall (Into Wood or Steel Studs)

SECONDARY APPLICATIONS
Metal Framing, Sheathing, Cement Board

DS230-M1
2" AUTO-FEED SCREWDRIVER ATTACHMENT

ITEM #9Z0021N

2 bits included

COMPATIBLE WITH:
MAKITA® SELECT MODELS

For MAKITA Models:
- FS2200
- FS2500
- FS4200
- FS6200
- XSF03
- XSF04
- XSF05

PRIMARY APPLICATIONS
Drywall (Into Wood or Steel Studs)

SECONDARY APPLICATIONS
Metal Framing, Sheathing, Cement Board

DS230-D1
2" AUTO-FEED SCREWDRIVER ATTACHMENT*

ITEM #9Z0011N

2 bits included

COMPATIBLE WITH:
DeWALT® SELECT MODELS

*Includes Adaptor

For DeWALT Models (Corded):
- DW252
- DW253
- DW255
- DW257
- DW266
- DW272
- DW276

PRIMARY APPLICATIONS
Drywall (Into Wood or Steel Studs)

SECONDARY APPLICATIONS
Metal Framing, Sheathing, Cement Board

DS230-D2
2" AUTO-FEED SCREWDRIVER ATTACHMENT

ITEM #9Z0012N

2 bits included

COMPATIBLE WITH:
DeWALT® SELECT MODELS

For DeWALT Models (Cordless):
- DCF620

PRIMARY APPLICATIONS
Drywall (Into Wood or Steel Studs)

SECONDARY APPLICATIONS
Metal Framing, Sheathing, Cement Board

5

DURASPIN™ 2" Auto-Feed Screwdriver Attachments

Convert a standard screwdriver into an auto-feed screw system in seconds

- Patented corner-fit feed system
- Feed on return functionality to improve speed and reliability of drives
- Universal nosepiece for drywall and wood applications
- Easily remove attachment to access bit
- Tool-free screw length adjustment
- Supports several screwdriver models
- Precise depth of drive adjustment with depth lock

Product Reference Chart

TOOL SPECS	DS230-S1	DS230-M1	DS230-D1	DS230-D2
Weight	1.3 lbs (.59 kg)	1.3 lbs (.59 kg)	1.3 lbs (.59 kg)	1.3 lbs (.59 kg)
Height	5.5" (140 mm)	5.5" (140 mm)	5.5" (140 mm)	5.5" (140 mm)
Length	11.0" (280 mm)	11.0" (280 mm)	10.8" (274 mm)	10.3" (262 mm)
Width	2.5" (64 mm)	2.5" (64 mm)	2.5" (64 mm)	2.5" (64 mm)
Warranty	5 yr	5 yr	5 yr	5 yr
FASTENER SPECS	Collated screws are located on pages 8–11			
Range	1"–2"	1"–2"	1"–2"	1"–2"
Shank Diameter	#6 - #12	#6 - #12	#6 - #12	#6 - #12
TOOL FEATURES				
Depth-of-Drive	Yes	Yes	Yes	Yes

DS530 Series
3" AUTO-FEED SCREWDRIVER ATTACHMENT

ITEM #10X0002N | #10X0012N | #10X0022N

Features
• Feed On Return
• Patented Sliding Screw Guide
• Corner-Fit Feed System
• Quick Release Clamp
• Extension Pole
• Adjustable Depth-of-Drive with Depth Lock

APPLICATIONS

Sheathing, decking, underlayment, sub-flooring, steel decking, drywall, cement board, rigid foam insulation

DS530-S1 (10X0002N) for SENCO Models:
• SG2510   • SG4100

DS530-D1 (10X0012N) for DeWalt Models:
• DW252   • DW253   • DW255
• DW257   • DW266   • DW272
• DW276   • DCF624

DS530-M1 (10X0022N) for MAKITA Models:
• FS2200   • FS2500   • FS4200
• FS6200   • XSF03   • XSF04
• XSF05

DS532-AC
3" ATTACHMENT KIT WITH 2500 RPM SCREWDRIVER

ITEM #10X0003N

2500 RPM/TPM

3 bits included

Features
• 3-in-1 Tool Kit
• Feed On Return
• Patented Sliding Screw Guide
• Corner-Fit Feed System
• Quick Release Clamp

APPLICATIONS

Wood and Composite Decking, Cement Board, Sub-Flooring and Underlayment, Sheathing to Steel, Steel Decking, Drywall to Wood or Steel

DS534-AC
3" ATTACHMENT KIT WITH 4000 RPM SCREWDRIVER

ITEM #10X0013N

4000 RPM/TPM

3 bits included

Features
• 3-in-1 Tool Kit
• Feed On Return
• Patented Sliding Screw Guide
• Corner-Fit Feed System
• Quick Release Clamp

APPLICATIONS

Sub-Flooring, Underlayment, Wood and Composite Decking, Cement Board, Drywall to Wood, Drywall to Steel

Product Reference Chart

TOOL SPECS	DS530 SERIES
Weight	3.4 lbs. (1.5 kg)
Height	3.5" (89 mm)
Length	33" (838 mm)
Width	2.75" (70 mm)
Warranty	5 yr
FASTENER SPECS	Collated screws are located on pages 8–11
Range	1"–3"
Shank Diameter	#6 - #12
TOOL FEATURES	
Depth-of-Drive	Yes

Additional screwdrivers, bits and adaptors sold separately — see page 12

Product Reference Chart

TOOL SPECS	DS532-AC	DS534-AC
Speed (RPM)	0–2500	0–4000
Current (Amps)	6.5	6.5
Weight	7 lbs (3.2 kg)	7 lbs. (3.2 kg)
Height	7" (178 mm)	7" (178 mm)
Length	40.5" (1029 mm)	40.5" (1029 mm)
Width	2.75" (70 mm)	2.75" (70 mm)
Warranty	5 yr	5 yr
FASTENER SPECS	Collated screws are located on pages 8–11	
Range	1"–3"	1"–3"
Shank Diameter	#6 - #12	#6 - #12
TOOL FEATURES		
Depth-of-Drive	Yes	Yes
Belt Hook	Yes	Yes
Trigger	Variable with lock	Variable with lock
Power Type	Corded	Corded
Reversible	Yes	Yes

6

SG2510
HIGH-PERFORMANCE 2500 RPM SCREWDRIVER

ITEM #6X0002N

2500 RPM/TPM

2 bits included

Features
- High-torque motor for driving into dense materials
- Industrial-grade metal gear housing designed to sustain heavy usage
- Great for all-day use with ergonomic, lightweight and compact design
- Trigger lock for continuous operation
- Industrial-grade 10' cord
- Includes 2 bits (as shown)

PRIMARY APPLICATIONS
Composite Decking, Wood Decking, Cement Board, Sheathing to Steel, Metal Framing

SECONDARY APPLICATIONS
Drywall to Wood, Drywall to Steel, Subfloor, Underlayment

SG4100
HIGH-PERFORMANCE 4000 RPM SCREWDRIVER

ITEM #6X0004N

4000 RPM/TPM

2 bits included

Features
- High-speed motor designed for drywall applications
- Industrial-grade metal gear housing designed to sustain heavy usage
- Great for all-day use with ergonomic, lightweight and compact design
- Trigger lock for continuous operation
- Industrial-grade 10' cord
- Includes 2 bits (as shown)

PRIMARY APPLICATIONS
Drywall to Wood, Drywall to Steel, Subfloor, Underlayment, Cement Board

SECONDARY APPLICATIONS
Wood Decking

7

Nosepieces and drive bits for every application:

drywall, wood, metal and metal channel.

Product Reference Chart

TOOL SPECS	SG2510	SG4100
Speed (RPM)	0–2500	0–4000
Current (Amps)	6.5	6.5
Weight	3.6 lbs (1.6 kg)	3.4 lbs (1.5 kg)
Height	7.5" (191 mm)	7.5" (191 mm)
Length	12.5" (318 mm)	12" (305 mm)
Width	2.5" (64 mm)	2.5" (64 mm)
Warranty	5 yr	5 yr
TOOL FEATURES		
Depth-of-Drive	Yes	Yes
Belt Hook	Yes	Yes
Trigger	Variable with Lock	Variable with Lock
Power Type	Corded	Corded
Reversible	Yes	Yes

Drywall to Wood Screws

Sharp point drywall screws for fastening interior drywall to wood				
Finish: Gray Phosphate		#2 Phillips	Bugle	Sharp
Gauge	**Length**	**Thread**	**Quantity**	**Item Code**
6	1¼"	Coarse	1000 Tub	06A125P
6	1¼"	Coarse	4000 Box	06A125PB
6	1⅝"	Coarse	1000 Tub	06A162P
6	1⅝"	Coarse	4000 Box	06A162PB
7	2"	Coarse	1000 Tub	07A200P
8	2½"	Coarse	1000 Box	08A250PK

Finish: Exterior				
Gauge	**Length**	**Thread**	**Quantity**	**Item Code**
6	1⅝"	Coarse	1000 Tub	06A162W

Drywall to Light Steel Screws

Sharp point, double thread drywall screws for fastening interior drywall to light-gauge metal studs				
Finish: Gray Phosphate ICC ES		#2 Phillips	Bugle	Sharp
Gauge	**Length**	**Thread**	**Quantity**	**Item Code**
6	1¼"	Double Thread	1000 Tub	06B125P*
6	1¼"	Double Thread	4000 Box	06B125PB*
6	1⅝"	Double Thread	1000 Tub	06B162P*
6	1⅝"	Double Thread	4000 Box	06B162PB*
6	2"	Double Thread	4000 Box	06B200PB*

Gypsum to Heavy Steel Screws

Drywall screws with self-drilling point for fastening drywall or gypsum sheathing to heavy-gauge metal studs				
Finish: Clear Zinc ICC ES		#2 Phillips	Bugle	Drill
Gauge	**Length**	**Thread**	**Quantity**	**Item Code**
6	1¼"	Fine	4000 Box	06C125CB*
6	1⅝"	Fine	4000 Box	06C162CB*
6	2"	Fine	4000 Box	06C200CB*

Finish: Exterior ICC ES				
Gauge	**Length**	**Thread**	**Quantity**	**Item Code**
6	1¼"	Fine	1000 Box	06C125WK*
6	1⅝"	Fine	1000 Box	06C162WK*
8	3"	⅔ Fine	1000 Box	08C300WK

Finish: Gray Phosphate ICC ES				
Gauge	**Length**	**Thread**	**Quantity**	**Item Code**
6	1¼"	Fine	4000 Box	06C125PB*
6	1⅝"	Fine	4000 Box	06C162PB*
6	2"	Fine	4000 Box	06C200PB*

ICC ES *ICC certified test data available on all highlighted items. Refer to ESR-4826 for details.

Wood to Wood Screws

General purpose interior wood screws				
Finish: Yellow Zinc		#2 Square	Flat	Sharp
Gauge	**Length**	**Thread**	**Quantity**	**Item Code**
8	1½"	Coarse	1000 Tub	08F150Y
8	1¾"	⅔ Coarse	1000 Tub	08F175Y
8	2"	⅔ Coarse	1000 Tub	08F200Y
8	2½"	⅔ Coarse	800 Tub	08F250Y
8	2½"	⅔ Coarse	1000 Box	08F250YK
8	3"	⅔ Coarse	800 Tub	08F300Y

Finish: Yellow Zinc		#2 Square	Flat	Type 17
Gauge	**Length**	**Thread**	**Quantity**	**Item Code**
8	1¾"	Coarse	4000 Box	08L175YB

Finish: Clear Zinc		#2 Square	Flat Head + Nibs	Type 17
Gauge	**Length**	**Thread**	**Quantity**	**Item Code**
8	1¼"	Coarse	4000 Box	08L125CBLCTS

Interior wood screws for harder-engineered lumber and flooring materials				
Finish: Yellow Zinc		#2 Square	Trim Head + Nibs	Sharp
Gauge	**Length**	**Thread**	**Quantity**	**Item Code**
8	2"	High Low	4000 Box	08F200YBTHSS

General purpose interior wood screws and subfloors				
Finish: Yellow Zinc		Rex	Flat	Type 17
Gauge	**Length**	**Thread**	**Quantity**	**Item Code**
8	1½"	Double	1000 Box	08F150YTK
8	1¾"	2/3 Double	1000 Box	08F175YTK
8	2"	2/3 Double	1000 Box	08F200YTK

08F175YTK
Double Thread Subfloor Screw

- Type 17 point and double thread design reduces installation time while improving holding power
- Our Rex drive provides smooth engagement with high torque transmitting capability
- Flathead for stronger holding power

Wood to Heavy Steel Screws

Pilot point screws for fastening sheathing to heavy steel

Finish: Clear Zinc

	#2 Square		Flat		Pilot

Gauge	Length	Thread	Quantity	Item Code
8	2″	Fine	1000 Box	08G200CKLFPS*

Wing drill point screws for fastening sheathing to heavy steel

Finish: Clear Zinc

	#2 Square		Wafer + Nibs		Wing Drill

Gauge	Length	Thread	Quantity	Item Code
8	1⅝″	Fine	1000 Tub	08G162CTWFWS*
10	1⅝″	Fine	1000 Box	10G162CTWFWS*

Finish: Exterior

Gauge	Length	Thread	Quantity	Item Code
#8	2″	Fine	1000 Tub	08G200WTWFWS*
#8	2½″	Fine	1000 Tub	08G250WWK*

Low profile screw head for fastening sheathing to steel

Finish: Clear Zinc

	#2 Square		Wafer		Drill

Gauge	Length	Thread	Quantity	Item Code
8	1″	Fine	4000 Box	08G100CBWFDS
10	1¼″	Fine	4000 Box	10G125CBWFDS

Wing drill point screws for fastening sheathing to heavy steel structures

Finish: Yellow Zinc

	Rex		Flat		Wing T3 Drill

Gauge	Length	Thread	Quantity	Item Code
12	1¾″	Fine	1000 Box	12G175YKLFAX*

Wing drill point screws for fastening sheathing to heavy steel structures

Finish: Yellow Zinc

	Rex		Flat		Wing T5 Drill

Gauge	Length	Thread	Quantity	Item Code
12	2″	Fine	1000 Box	12G200YKLFCX*
12	2½″	Fine	1000 Box	12G250YKLFCX*

08G250WWK
Wing drill point screw
- Finish exceeds 1000 hours salt spray testing per ASTM B117

Wood to Light Steel Screws

Sharp point screws for fastening sheathing to light steel

Finish: Clear Zinc

	#2 Square		Flat		Sharp

Gauge	Length	Thread	Quantity	Item Code
8	1½″	Double	1000 Tub	08G150CTLDSS

Cement Board Screws

Screws for fastening cement board or Hardie® board to wood

Finish: Exterior

	#2 Square		Wafer + Nibs		Spoon

Gauge	Length	Thread	Quantity	Item Code
8	1¼″	High Low	1000 Tub	08T125W
8	2″	High Low	1000 Tub	08T200W

Screws for fastening cement board or Hardie® board to steel studs

Finish: Exterior

	#2 Square		Wafer + Nibs		Drill

Gauge	Length	Thread	Quantity	Item Code
8	1½″	Fine	4000 Box	08T150WBWFDS

Decking and Dock Screws

Exterior wood screws for projects such as decks, tile roofing, fencing, siding and docks

Finish: Exterior

	#2 Square		Flat		Type 17

Gauge	Length	Thread	Quantity	Item Code
8	1¾″	⅔ Coarse	1000 Tub	08D175W
8	2″	⅔ Coarse	1000 Tub	08D200W**
8	2½″	⅔ Coarse	800 Tub	08D250W**
8	2½″	⅔ Coarse	1000 Box	08D250WK**
8	3″	⅔ Coarse	800 Tub	08D300W**
8	3″	⅔ Coarse	1000 Box	08D300WK**

Finish: Stainless 304

Gauge	Length	Thread	Quantity	Item Code
8	2½″	⅔ Coarse	800 Tub	08D250S
9	3″	⅔ Coarse	800 Tub	09D300S

Underlayment Wood to Wood Screws

Finish: Gray Phosphate

	#2 Phillips		Trim Head + Nibs		Sharp

Gauge	Length	Thread	Quantity	Item Code
7	1″	High Low	4000 Box	07Q100PB

Gray Phosphate		#2 Square		
7	1¼″	High Low	4000 Box	07Q125PBQ

**MIAMI-DADE COUNTY LISTED**

ICC ES *ICC certified test data available on all red highlighted items. Refer to ESR-4826 for details.

** Approved for use in Miami-Dade County FL.

Composite Decking Screws

Trim head screws for fastening composite decking to wood				
Finish: Exterior				
	#2 Square	Trim		Type 17
Gauge	Length	Thread	Quantity	Item Code
8	2½"	⅔ Coarse	800 Tub	08R250W
8	3"	⅔ Coarse	800 Tub	08R300W

Specially designed cup head screws eliminate mushrooming around screw head after installation				
Finish: Exterior/Gray				
	#2 Square	Cupped Pan		Sharp
Gauge	Length	Thread	Quantity	Item Code
8	2½"	Multi-Thread	800 Tub	08S250W003
Finish: Exterior/Tan				
Gauge	Length	Thread	Quantity	Item Code
8	2½"	Multi-Thread	800 Tub	08S250W592
Finish: Exterior/Brown				
Gauge	Length	Thread	Quantity	Item Code
8	2½"	Multi-Thread	800 Tub	08S250W497

ICC ES™

*ICC certified test data available on all highlighted items. Refer to ESR-3558 for details.

10

Metal to Metal Screws

General purpose screws for fastening metal to metal				
Finish: Clear Zinc				
	#2 Square	Flat Pan		Drill
Gauge	Length	Thread	Quantity	Item Code
10	¾"	Fine	1000 Tub	10M075CTMFDS*
10	1"	Fine	1000 Box	10M100CKMFDS*
Finish: Yellow Zinc				
	Rex	Flat Pan		Drill
Gauge	Length	Thread	Quantity	Item Code
10	¾"	Fine	1000 Tub	10M075YTFFDX*
Finish: Yellow Zinc				
	Rex	Flat Pan		T4 Drill
Gauge	Length	Thread	Quantity	Item Code
10	¾"	22 TPI	8000 Loose	10M075YLFT4X*
10	¾"	22 TPI	1000 Box	10M075YKFT4X*
Finish: Yellow Zinc				
	Rex	Flat Pan		T4 Drill
Gauge	Length	Thread	Quantity	Item Code
12	⅞"	Fine	1000 Box	12M087YKFF4X*
Finish: Yellow Zinc				
	Rex	Flat Pan		T3 Drill
Gauge	Length	Thread	Quantity	Item Code
12	1"	Fine	1000 Box	12M100YKFF3X*

METAL TO METAL

Low Profile Framing Screws

Self tapping metal framing screw

Finish: Clear Zinc				
	+ #2 Phillips	Mod Truss	Sharp	ICC ES
Gauge	Length	Thread	Quantity	Item Code
8	½"	Fine	1000 Tub	08M050CTRFSP*
10	¾"	Fine	1000 Box	10M075CSK

Self drilling and tapping metal framing screws

Finish: Clear Zinc				
	+ #2 Phillips	Mod Truss	Drill	ICC ES
Gauge	Length	Thread	Quantity	Item Code
8	½"	Fine	1000 Tub	08M050CTRFDP*
10	¾"	22 TPI	1000 Box	10M075CDK

10M075CDK
22 TPI Metal Framing Screw

- Low profile head to reduce drywall flexing
- Higher thread count for better fastener engagement

Specialty Screws

General purpose screws for a range of applications including window installation and crating

Finish: Clear Zinc				
	■ #2 Square	Round Washer	Type 17	
Gauge	Length	Thread	Quantity	Item Code
8	1¼"	Coarse	4000 Box	08X125CBACTS

Finish: Clear Zinc				
	■ #2 Square	Round Washer	Drill	ICC ES
Gauge	Length	Thread	Quantity	Item Code
8	1¼"	Double	1000 Box	08X125CKADDS*
8	2"	Double	1000 Box	08X200CKADDS*

Finish: Clear Zinc				
	■ #2 Square	Pan Framing	Sharp	
Gauge	Length	Thread	Quantity	Item Code
8	1"	Double	4000 BOX	08M100CBPDSS

11

LIGHT METAL

Bits for Current Tools

Integrated auto-feed screwdriver — 2 or 25 bits per pack*

Bits Fit	✚ ITEM #	⬛ ITEM #	✳ ITEM #
DS222-18V DS225-18V DS242-AC DS245-AC	EA0297 EA0297N*	EA0298 EA0298N*	EA0299 EA0299N*
DS322-18V DS342-AC	EA0400	EA0401	EA0402

Auto-feed attachments and kits — 2 or 25 bits per pack*

Bits Fit	✚ ITEM #	⬛ ITEM #	✳ ITEM #
DS230	EA0300	EA0301 EA0301N*	EA0302
DS530 DS532-AC DS534-AC	EA0314	EA0315 EA0315N*	EA0316 EA0316N*

For PAMFast auto-feed screw system — 25 bits per pack

Bits Fit	✚ ITEM #	⬛ ITEM #	✳ ITEM #
1"-3" Models	-	EA0396P	EA0397P

*25 count high torque bits for use in metal applications

Bit Tip

Loose screwdriver — 10 bits per pack

Bits Fit	✳ ITEM #
SG2510 SG4100	EA0308

Bits for Retired Tools

Integrated auto-feed screwdriver — 2 bits per pack

Bits Fit	✚ ITEM #	⬛ ITEM #	✳ ITEM #
DS232-AC DS235-AC DS212-18V DS215-18V	EA0297	EA0298	EA0299
DS332-AC DS312-18V	EA0300	EA0301	EA0302
DS425-AC DS440-AC	EA0314	EA0315	EA0316

When attaching to SG2510, SG4100 and Makita with ADP019 & MB0174

Bits Fit	✚ ITEM #	⬛ ITEM #	✳ ITEM #
DS220	EA0311	EA0312	EA0313
DS320	EA0314	EA0315	EA0316

When attaching to DeWalt with ADP009

Bits Fit	✚ ITEM #	⬛ ITEM #	✳ ITEM #
DS220	EA0317	EA0318	EA0319
DS320	EA0320	EA0321	EA0322

DS530 Series Adapters

For attaching screwdrivers to DS530 attachments

Screwdriver	Fits Tools		Adapter ITEM #
SENCO	SG2510	SG4100	MB0184
DeWalt	DW252 DW253 DW255 DW257	DW266 DW272 DW276	MB0185
	DCF624		MB0183
MAKITA	FS2200 FS2500 FS4200 FS6200	XSF03 XSF04 XSF05	MB0186
	FS2701		MB0187

DS220 and DS320 Adapters

For attaching screwdrivers to DS220 and DS320 attachments

Screwdriver	Fits Tools		Adapter ITEM #
SENCO	SG2510	SG4100	MB0173
DeWalt	DW252 DW253 DW255 DW257	DW266 DW272 DW276	ADP009
MAKITA	FS2200 FS2500 FS4200 FS6200	XSF03 XSF04 XSF05	ADP019
	FS2701		MB0174

SCREW SYSTEM ACCESSORIES

Nosepieces for Current and Retired Tools

For wood applications

Fits Tools	Range	ITEM #
DS222-18V DS225-18V DS220 DS230 DS242-AC DS245-AC	1"–2"	FB0157
DS320 DS322-18V DS342-AC DS425AC DS440AC DS530 DS532-AC DS534-AC	1"–3"	FB0159

For drywall applications

Fits Tools	Range	ITEM #
DS220	1"–2"	FC0878
DS320 DS425AC DS440AC	1"–3"	FC0895

For metal framing applications

Fits Tools	Range	ITEM #
DS222-18V DS225-18V DS220 DS230 DS242-AC DS245-AC	½"–1"	FB0155
DS220 DS230 DS222-18V DS225-18V DS242-AC DS245-AC	½"–1"	FC0822*
DS320 DS322-18V DS342-AC DS425AC DS440AC DS530 DS532-AC DS534-AC	½"–1"	FC0887*

*Not recommended for screws exceeding 1"

For general applications

Fits Tools	Range	ITEM #
DS222-18V DS225-18V DS220 DS230 DS242-AC DS245-AC	1"–2"	FC1022
DS320 DS322-18V DS342-AC DS425AC DS440AC DS530 DS532-AC DS534-AC	1"–3"	FC1023

Rubber & Sand Paper Replacement Pads

ITEM #	Description	Quantity	Fits Nosepiece
FC0983	Round no–mar pad with adhesive	3	FC0822, FC0887
FA0334	Square non–skid pad with adhesive	3	FB0157, FB0159

Li-Ion Batteries

For use with 18V Li-Ion DuraSpin and SENCO FUSION tools

18V Li-Ion Battery 1.5 amp hour	For use with	
VB0155	DS222-18V DS225-18V DS322-18V	• 1.5 amp hour • High-quality reliable cells • Longer storage life • Charges to 80% in 15 minutes

18V Li-Ion Battery 3.0 amp hour	For use with	
VB0190	DS222-18V DS225-18V DS322-18V	• 3.0 amp hour • State of the art 21700 cells • Longer storage life • Drives more than 2X the fasteners as VB0155 (above)

Battery Chargers

For use with SENCO batteries

Battery Charger	For use with	
VB0156	VB0155 VB0190**	• 3 amp quick charger • Battery charge indicators display charge status of your battery

Battery Charger	For use with	
VB0189	VB0155 VB0190	• 5 amp quick charger • Upright design is ideal for wall mounting

**The VB0189 charger is recommended for the VB0190 battery; using the VB0156 charger will result in longer charge times.

THE DIFFERENCE IS IN THE DETAILS

Experience award-winning cordless convenience in all-day, everyday trim tools. Available in 15, 16 and 18 gauge, cordless pneumatic tools from SENCO feature a patented Fusion cordless air-power technology.

APPLICATIONS

Finish and trim, fine woodworking, cabinet, furniture, decorative trim

KEY FEATURES

- Rugged aluminum magazine
- Selectable drive switch allows for contact or sequential trigger actuation
- Nose-mounted LED light
- Adjustable belt hook
- Thumbwheel depth-of-drive
- EZ-Clear feature for quickly clearing jams
- Includes storage bag, battery and charger

SENCO has set the industry standard for pneumatic finish and fine woodworking tools, providing compact, ultra-light, easy-to-use tools designed for precision and longevity.

We offer a broader range of tools than anyone else, covering 15–23 gauge nailers and 16–19 gauge staplers, including the industry benchmark FinishPro®42XP.

APPLICATIONS

Cabinetry, furniture, decorative trim, crown molding, custom woodworking applications and all other finish needs

KEY FEATURES

- EZ-Clear™ latch to clear jams fast
- No-mar pads to protect woodwork
- Clear line-of-sight for precision fastening
- Comfort grip
- Adjustable depth-of-drive

F-18XP
2⅛" 18 GA. CORDLESS PNEUMATIC BRAD NAILER

ITEM #10M0001N

18GA

Features
- Fusion cordless air-power technology
- Sequential or bump fire modes
- Tool-free depth-of-drive
- Includes one Li-ion battery, quick charge battery charger and storage bag

F-16XP
2½" 16 GA. CORDLESS PNEUMATIC FINISH NAILER

ITEM #10N0001N

16GA

Features
- Fusion cordless air-power technology
- Sequential or bump fire modes
- Tool-free depth-of-drive
- Includes one Li-ion battery, quick charge battery charger and storage bag

F-15XP
2½" 15 GA.CORDLESS PNEUMATIC FINISH NAILER

ITEM #10L0001N

15GA **34°**

Features
- Fusion cordless air-power technology
- Sequential or bump fire modes
- Tool-free depth-of-drive
- Includes one Li-ion battery, quick charge battery charger and storage bag

F-LXP
1 ½" 18 GA. ¼" CROWN CORDLESS PNEUMATIC FINISH STAPLER

ITEM #10Y0001N

18GA

Features
- Fusion cordless air-power technology
- Sequential or bump fire modes
- Tool-free depth-of-drive
- Includes one Li-ion battery, quick charge battery charger and storage bag

15

Product Reference Chart

TOOL SPECS	F-18XP	F-16XP	F-15XP	F-LXP
Weight with Battery	6.6 lbs (3.0 kg)	6.7 lbs (3.1 kg)	6.8 lbs (3.1 kg)	6.8 lbs (3.1 kg)
Height	12.5" (318 mm)	12.5" (318 mm)	12.5" (318 mm)	12.5" (318 mm)
Length	10.2" (259 mm)	11.6" (295 mm)	12.6" (320 mm)	10.4" (264 mm)
Width	3.9" (99 mm)	3.9" (99 mm)	5.3" (135 mm)	3.9" (99 mm)
Charge Time	80% in 15 minutes, 100% in 45 minutes			
Warranty	5 yrs	5 yrs	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on pages 23-25, 27			
Gauge, Gauge/Crown	18	16	15	18/¼"
Range	⅝"–2⅛"	¾"–2½"	1¼"–2½"	⅜"–1½"
Capacity	110	110	110	110
Angle/Collation	Straight Glued Strip	Straight Glued Strip	34° Angled Taped Strip	Straight Glued Strip
Series	AY, AX	M0	DA	L
TOOL FEATURES				
Jam Reduction Intelligence	Yes	Yes	Yes	Yes
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	Yes, Tool-Free	Yes, Tool-Free
EZ-Clear Jam Clearing	No	No	Yes	No
Trigger Actuation	Sequential or Contact	Sequential or Contact	Sequential or Contact	Sequential or Contact
Nose Mounted LED Light	Yes	Yes	Yes	Yes
Belt Hook	Adjustable and Reversible	Adjustable and Reversible	Adjustable and Reversible	Adjustable and Reversible

TN11G1
1⅜" HEADLESS PINNER

23GA

Features
- Neverlube® oil-free design
- Magazine automatically adjusts for fastener length
- Ergonomic angled "pistol-grip" handle
- Ultra-narrow nosepiece
- Reversible belt hook
- Last nail lockout

TN11L1
2" HEADLESS PINNER

23GA

Features
- Neverlube® oil-free design
- Magazine automatically adjusts for fastener length
- Ergonomic angled "pistol-grip" handle
- Ultra-narrow nosepiece
- Reversible belt hook
- Last nail lockout

The Details Matter

Neverlube® oil-free tools are designed for maintenance-free operation, eliminating the risk of oil spillover onto the work surface.

NEVERLUBE®
OIL FREE TOOL

16

Product Reference Chart

TOOL SPECS	TN11G1	TN11L1
Trigger	Sequential	Sequential
Operating Pressure	70–100 psi (4.8–6.9 bar)	70–110 psi (4.8–7.6 bar)
Air Consumption (60 CPM)	1.1 scfm	1.1 scfm
Air Inlet	¼" NPT	¼" NPT
Weight	2.41 lbs (1.09 kg)	2.86 lbs (1.3 kg)
Height	7.8" (198 mm)	9.2" (233 mm)
Length	8.57" (218 mm)	8.69" (220 mm)
Width	2.6" (66 mm)	2.6" (66 mm)
Main Body Material	Aluminum	Aluminum
Warranty	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on page 23	
Gauge	23	23
Range	½"–1⅜"	½"–2"
Capacity	100	100
Angle/Collation	Straight Glued Strip	Straight Glued Strip
Series	A1, CZ	A1, CZ
TOOL FEATURES		
Depth-of-Drive	No	No
Belt Hook	Yes	Yes
NeverLube®	Yes	Yes
Exhaust	Rear	Rear

TN21L1
2″ PINNER

21GA

Features
• Neverlube® oil-free design
• Magazine automatically adjusts for fastener length
• Ergonomic angled "pistol-grip" handle
• Ultra-narrow nosepiece
• Reversible belt hook
• Last nail lockout

LS1XP
1″ HEADLESS BRAD NAILER

ITEM #8N0001N

18GA

Features
• Never-Lube® design — no lubrication to stain fine woods
• Ergonomic handle for all-day comfort
• Narrow nose for tight corners

FinishPro®18Mg
2⅛″ BRAD NAILER

ITEM #1U0021N

18GA

Features
• Metal cylinder for increased durability
• EZ-Clear™ latch virtually eliminates downtime caused by fastener jams
• Narrow nose for tight corners
• Includes case, swivel air plug and wrench

FinishPro®18BMg
2⅛″ BRAD NAILER

ITEM #9B0001N

18GA

Features
• Oil-free design — no oil required
• Ultra-lightweight for ease of use and maneuverability
• Nose mounted LED light illuminates dark work spaces
• Includes case, swivel air plug and wrench

Product Reference Chart

TOOL SPECS	TN21L1	LS1XP	FinishPro®18Mg	FinishPro®18BMg
Trigger	Sequential	Sequential	Selectable	Selectable
Operating Pressure	70–110 psi (4.8–7.6 bar)	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)
Air Consumption (60 CPM)	1.1 scfm	1.92 scfm	2.4 scfm	1.6 scfm
Air Inlet	¼″ NPT	¼″ NPT	¼″ NPT	¼″ NPT
Weight	3.16 lbs (1.43 kg)	2.9 lbs (1.3 kg)	2.48 lbs (1.12 kg)	2.8 lbs (1.26 kg)
Height	9.2″ (233 mm)	8.25″ (210 mm)	9.75″ (248 mm)	9.8″ (248 mm)
Length	8.76″ (222 mm)	9″ (229 mm)	10.5″ (267 mm)	10″ (255 mm)
Width	2.6″ (66 mm)	2″ (51 mm)	2.5″ (63.5 mm)	2.5″ (63.5 mm)
Main Body Material	Aluminum	Aluminum	Magnesium	Magnesium
Warranty	5 yrs	5 yrs	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on pages 23-24			
Gauge	21	18	18	18
Range	⅝″–2″	½″–1″	⅝″–2⅛″	⅝″–2⅛″
Capacity	200	100	110	100
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip
Series	ZX	AZ	AX	AX
TOOL FEATURES				
Depth-of-Drive	No	No	Yes, Tool-Free	Yes, Tool-Free
Belt Hook	Yes	Fixed	Yes	Yes
NeverLube®/Oil-Less	NeverLube®	NeverLube®	Oil-Less	Oil-Less
Exhaust	Rear	Fixed	Rear Adjustable	Rear Adjustable

SLP20XP
1⅝" BRAD NAILER

ITEM #430101N

18GA

Features
• Never-Lube® design — no oil required
• Drives both slight and medium headed brads
• Muffler ensures quieter operation
• Includes case

FinishPro®25XP
2⅛" BRAD NAILER

ITEM #760102N

18GA

Features
• Never-Lube® design — no oil required
• Drives both slight and medium headed brads
• Powerful — ensures complete drives into hard substrates
• Includes case

FinishPro®16XP
2½" FINISH NAILER

ITEM #9S0001N

16GA

Features
• Redesigned EZ-Clear™ latch for quick and easy jam clearing
• Upgraded magazine feed system for consistent, reliable shot performance
• Selectable single fire and bump fire modes
• Tool free depth of drive adjustment

Product Reference Chart

TOOL SPECS	SLP20XP	FinishPro®25XP	FinishPro®16XP
Trigger	Sequential	Sequential	Selectable
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)
Air Consumption (60 CPM)	1.92 scfm	1.92 scfm	2.22 scfm
Air Inlet	¼" NPT	¼" NPT	¼" NPT
Weight	2.3 lbs (1 kg)	2.7 lbs (1.2 kg)	4.0 lbs (1.8 kg)
Height	8.25" (210 mm)	9.9" (251 mm)	11.4" (290 mm)
Length	9.5" (241 mm)	9.8" (249 mm)	12" (305 mm)
Width	2" (50.8 mm)	2.2" (56 mm)	4" (102 mm)
Main Body Material	Aluminum	Aluminum	Magnesium
Warranty	5 yrs	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on pages 23–24		
Gauge	18	18	16
Range	⅝"–1⅝"	⅝"–2⅛"	1¼"–2½"
Capacity	110	110	110
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip
Series	AX, AY	AX, AY	A4, MO
TOOL FEATURES			
Depth-of-Drive	No	Yes, Tool-Free	Yes, Tool-Free
Belt Hook	No	Yes	Yes
Oil-Less	Yes	Yes	No
Exhaust	Fixed	Adjustable	Adjustable

FinishPro®30XP
2″ ANGLED FINISH NAILER

ITEM #9P0002N

15 GA 34°

Features
• Never-Lube® design — no oil required
• EZ-Clear™ latch virtually eliminates downtime caused by fastener jams
• Adjustable depth of drive
• Includes case and belt hook

FinishPro®35Mg
2½″ ANGLED FINISH NAILER

ITEM #6G0001N

15 GA 34°

Features
• EZ-Clear™ latch virtually eliminates downtime caused by fastener jams
• Integrated air blower clears debris from work surface
• Metal cylinder for increased durability
• Includes case, swivel air plug and wrench

FinishPro®42XP
2½″ ANGLED FINISH NAILER

ITEM #4G0001N

15 GA 34°

Features
• Never-Lube® design — no oil required
• EZ-Clear™ latch virtually eliminates downtime caused by fastener jams
• High-strength driver with threaded connection
• Metal cylinder for increased durability
• Includes case, belt hook and contact trigger kit

Product Reference Chart

TOOL SPECS	FinishPro®30XP	FinishPro®35Mg	FinishPro®42XP
Trigger	Sequential	Selectable	Sequential
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)
Air Consumption (60 CPM)	2.16 scfm	3.2 scfm	3.87 scfm
Air Inlet	¼″ NPT	¼″ NPT	¼″ NPT
Weight	3.8 lbs (1.73 kg)	4.2 lbs (1.9 kg)	4.7 lbs (2.1 kg)
Height	9.63″ (244.6 mm)	12.25″ (311 mm)	11.25″ (286 mm)
Length	12″ (305 mm)	13″ (330 mm)	13″ (330 mm)
Width	3.25″ (82.5 mm)	3.5″ (89 mm)	3.5″ (89 mm)
Main Body Material	Magnesium	Magnesium	Magnesium
Warranty	5 yrs	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on page 25		
Gauge	15	15	15
Range	1″–2″	1¼″–2½″	1¼″–2½″
Capacity	104	110	104
Angle/Collation	34° Angled Tape Strip	34° Angled Tape Strip	34° Angled Tape Strip
Series	DA	DA	DA
TOOL FEATURES			
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	Yes, Tool-Free
Belt Hook	Yes	Yes	Yes
Oil-Less	Yes	Yes	Yes
Exhaust	Fixed	Adjustable	Adjustable

SLS20XP

³⁄₁₆", ¼", ⅜" CROWNS, 1½" FINE/MEDIUM WIRE STAPLER

SEE ITEM # CHART

19GA **18**GA

Features
• Never-Lube® design — no oil required
• Ultra-lightweight for ease of use and maneuverability
• Metal cylinder for increased durability
• Muffler ensures quieter operation

SLS25XP

¼", ⅜" CROWNS, 1½" MEDIUM WIRE STAPLER

SEE ITEM # CHART

18GA

Features
• Never-Lube® design — no oil required
• Ultra-lightweight for ease of use and maneuverability
• Metal cylinder for increased durability
• Muffler ensures quieter operation

SKSXP

¼", ⅜", ⁷⁄₁₆" CROWNS, 1½" MEDIUM/HEAVY WIRE STAPLER

SEE ITEM # CHART

18GA **16**GA

Features
• Never-Lube® design — no oil required
• EZ-Clear™ latch virtually eliminates downtime caused by fastener jams
• Long 1" lip to get into tight spots

SLS20XP, SLS25XP and SKSXP Item Code Chart

Model	Crown	Item Code
SLS20XP-K	¼"	490101N
SLS20XP-L	¼"	490103N
SLS20XP-L W/CASE	¼"	490105N
SLS20XP-L SENCOMATIC	¼"	490015N
SLS20XP-M	⅜"	490107N
SLS20XP-R	³⁄₁₆"	490111N
SLS25XP-L	¼"	820103N
SLS25XP-M	⅜"	820107N
SKSXP-L	¼"	300120N
SKSXP-M	⅜"	300152N
SKSXP-N	⁷⁄₁₆"	300184N

Product Reference Chart

TOOL SPECS	SLS20XP	SLS25XP	SKSXP
Trigger	Sequential	Contact	Sequential
Operating Pressure	70–120 psi (4.8–8.3 bar)	70-120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)
Air Consumption (60 CPM)	1.92 scfm	1.92 scfm	2.16 scfm
Air Inlet	¼" NPT	¼" NPT	¼" NPT
Weight	2.5 lbs (1.13 kg)	2.67 lbs (1.21 kg)	4.2 lbs (1.9 kg)
Height	8.5" (216 mm)	9" (229 mm)	9.25" (238 mm)
Length	12" (305 mm)	12" (305 mm)	12.38" (314 mm)
Width	2" (50.8 mm)	2" (50.8 mm)	3" (76 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on pages 26–28		
Gauge	19, 18	18	18, 16
Crown	³⁄₁₆", ¼", ⅜"	¼", ⅜"	¼", ⅜", ⁷⁄₁₆"
Range	⅜"–1½"	⅜"–1½"	¾"–1½"
Capacity	168	168	145
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip
Series	K, L, M, R	L, M	L, M, N
TOOL FEATURES			
Depth-of-Drive	Yes	Yes	No
Belt Hook	No	No	No
Oil-Less	Yes	Yes	Yes

SLS150Mg
¼" CROWN, 1⁹⁄₁₆" MEDIUM WIRE STAPLER

ITEM #8C0001N

18 GA

Features
- Ultra-lightweight for ease of use and maneuverability
- Nose-mounted LED light — illuminates work surface
- Durable composite magazine
- Reload indicator on magazine
- Includes case and wrench

SLS18Mg
¼" CROWN, 1½" MEDIUM WIRE STAPLER

ITEM #1W0021N

18 GA

Features
- Ultra-lightweight for ease of use and maneuverability
- Metal cylinder for increased durability
- Reload indicator on magazine
- Includes case, swivel air plug and wrench

Product Reference Chart

TOOL SPECS	SLS150Mg	SLS18Mg
Trigger	Selectable	Selectable
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)
Air Consumption (60 CPM)	2.4 scfm	2.4 scfm
Air Inlet	¼" NPT	¼" NPT
Weight	2.6 lbs (1.8 kg)	2.6 lbs (1.8 kg)
Height	9.5" (241 mm)	9.5" (241 mm)
Length	10.25" (260 mm)	10.25" (260 mm)
Width	2.5" (63.5 mm)	2.5" (63.5 mm)
Main Body Material	Magnesium	Magnesium
Warranty	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on page 27	
Gauge	18	18
Crown	¼"	¼"
Range	½"–1⁹⁄₁₆"	⅜"–1½"
Capacity	110	110
Angle/Collation	Straight Glued & Taped Strip	Straight Glued & Taped Strip
Series	L	L
TOOL FEATURES		
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free
Belt Hook	Yes	Yes
Oil-Less	Yes	Yes

SC1XP Senclamp®
7⁄16" CROWN, 9⁄16" SENCLAMP® FASTENER

ITEM #220101N

25GA

Features
• Senclamp® fasteners pull the joint together during driving for a tight, permanent fit
• Eliminates milling, doweling, clamping, screwing and other time-consuming, cost-adding operations
• The Senclamp high-carbon steel fastener derives added strength from its special webbed design

SC2 Sencor®
1" CROWN, 1⁄2" CORRUGATED STAPLER

ITEM #470001N

25GA

Features
• Powerful — ensures complete drives into hard substrates
• Eliminates gluing, milling, doweling, screwing and clamping
• Added strength for larger butt joints

22

Product Reference Chart

TOOL SPECS	SC1XP Senclamp®	SC2 Sencor®
Trigger	Sequential	Sequential
Operating Pressure	80–110 psi (5.5–7.5 bar)	80–110 psi (5.5–7.5 bar)
Air Consumption (60 CPM)	3.8 scfm	3.7 scfm
Air Inlet	3⁄8" NPT	3⁄8" NPT
Weight	6.3 lbs (2.8 kg)	6.9 lbs (3.1 kg)
Height	9.8" (249 mm)	9.44" (240 mm)
Length	12.7" (322 mm)	12.5" (318 mm)
Width	2.5" (63.5 mm)	2" (50.8 mm)
Main Body Material	Aluminum	Aluminum
Warranty	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on page 29	
Gauge	25	25
Crown	7⁄16"	1"
Range	5⁄16"–9⁄16"	1⁄4"–1⁄2"
Capacity	120	80
Angle/Collation	Straight Glued & Taped Strip	Straight Glued Strip
Series	Y	X
TOOL FEATURES		
Depth-of-Drive	No	No
Belt Hook	No	No
Oil-Less	No	No

23ᴳᴬ Headless Straight Strip Pins

Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code
½″	Chisel	Headless	Galv	Plain	Straight Glued Strip	15.5M	CZ08EAAN
⅝″	Chisel	Headless	Galv	Plain	Straight Glued Strip	10M	CZ10EAA
⅝″	Chisel	Headless	Galv	Plain	Straight Glued Strip	15.5M	CZ10EAAN
¾″	Chisel	Headless	Galv	Plain	Straight Glued Strip	10M	CZ11EAA
¾″	Chisel	Headless	Galv	Plain	Straight Glued Strip	15.5M	CZ11EAAN
1″	Chisel	Headless	Galv	Plain	Straight Glued Strip	10M	CZ13EAA
1¼″	Chisel	Headless	Galv	Plain	Straight Glued Strip	10M	CZ15EAA
1⅜″	Chisel	Headless	Galv	Plain	Straight Glued Strip	10M	CZ16EAA
1½″	Chisel	Headless	Galv	Plain	Straight Glued Strip	10M	CZ17EAA
2″	Chisel	Headless	Galv	Plain	Straight Glued Strip	10M	CZ21EAA
½″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A100509
⅝″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A100629
¾″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A100759
1″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A101009
1¼″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A101259
1⅜″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A101379
1½″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A101509
2″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.6M (CS)	A102009
½″–1″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.5M (CS)	A109809*
1″–2″	Chisel	Headless	Galv	Plain	Straight Glued Strip	2.5M (CS)	A109909*

Pins fasten the smallest of trim securely leaving a nearly invisible hole

CS-Clamshell, *Variety Pack
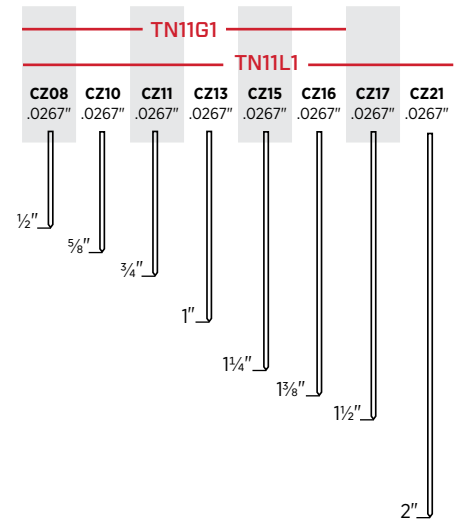
21ᴳᴬ Medium Straight Strip Head Pins

21 gauge pins offer significantly more holding power than 23 gauge pins while leaving a much smaller indent than an 18 gauge brad

Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code
⅝″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	ZX10EAA
1″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	ZX13EAA
1⅜″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	ZX16EAA
1⅝″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	ZX18EAA
2″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	ZX21EAA

CS-Clamshell
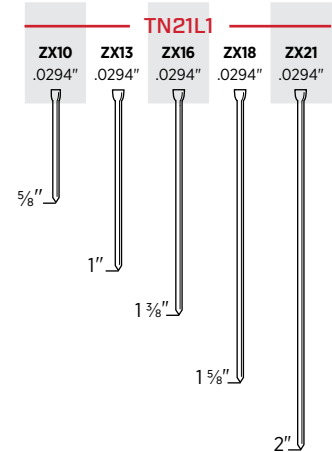
18ᴳᴬ Straight Strip Brad Nails

Cabinets, decorative trim, picture frames and molding

Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code
⅝″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX10EAA
¾″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX11EAA
1″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX13EAA
1¼″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX15EAA
1½″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX17EAA
1⅝″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX18EAA
1¾″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX19EAA
2″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX21EAAN
2⅛″	Chisel	Medium	Galv	Plain	Straight Glued Strip	5M	AX22EAAN
1″	Chisel	Medium	Galv	Plain	Straight Glued Strip	1M (CS)	A201009
1¼″	Chisel	Medium	Galv	Plain	Straight Glued Strip	1M (CS)	A201259
1½″	Chisel	Medium	Galv	Plain	Straight Glued Strip	0.8M (CS)	A201509
2″	Chisel	Medium	Galv	Plain	Straight Glued Strip	0.8M (CS)	A202009
⅝″–1¼″	Chisel	Medium	Galv	Plain	Straight Glued Strip	1.2M (CS)	A209809*
1–2″	Chisel	Medium	Galv	Plain	Straight Glued Strip	1.2M (CS)	A209909*

CS-Clamshell, *Variety Pack
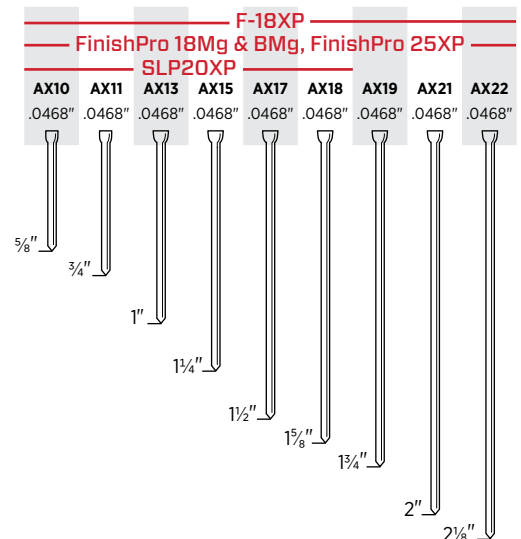
18GA **Headless and Slight Head Brad Nails**

Cabinets, decorative trim, picture frames and molding							
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code
½″	Chisel	Headless	Galv	Plain	Straight Glued Strip	5M	AZ08EAA
¾″	Chisel	Headless	Galv	Plain	Straight Glued Strip	5M	AZ11EAA
1″	Chisel	Headless	Galv	Plain	Straight Glued Strip	5M	AZ13EAA
⅝″	Chisel	Slight	Galv	Plain	Straight Glued Strip	5M	AY10EAA
¾″	Chisel	Slight	Galv	Plain	Straight Glued Strip	5M	AY11EAA
1″	Chisel	Slight	Galv	Plain	Straight Glued Strip	5M	AY13EAA

F-18XP
SLP20XP
FinishPro 25XP

AZ08 .0468″ LS1XP AZ11 .0468″ AZ13 .0468″ AY10 .0468″ AY11 .0468″ AY13 .0468″

½″ ¾″ 1″ ⅝″ ¾″ 1″
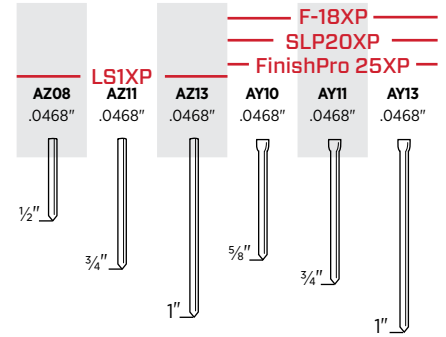
16GA **Straight Strip Finish Nails**

Furniture and cabinets, molding and trim, baseboard, chair rails, window casings and upholstery trim panels							
Length	Point	Head	Finish	Coating	Collation	Box Count	Item Code
¾″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M	M001000
1″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001001
1¼″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001002
1½″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001003
1¾″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001004
2″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001005
2½″	Chisel	T-head	Galv	Plain	Straight Glued Strip	2M (PT)	M001007
2″	Chisel	T-head	Galv	Plain	Straight Glued Strip	0.7M (CS)	A402009

CS-Clamshell, PT-Plastic Tub

F-16XP
FinishPro 16XP

M001000 .063″ M001001 .063″ M001002 .063″ M001003 .063″ M001004 .063″ M001005 .063″ M001007 .063″

¾″ 1″ 1¼″ 1½″ 1¾″ 2″ 2½″
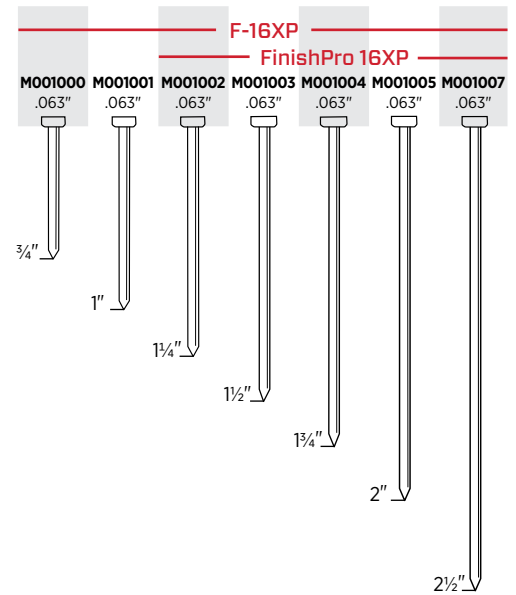
FINISH & WOODWORKING FASTENERS

15GA
34°

Angled Strip Finish Nails

Furniture and cabinets, molding and trim, baseboard, chair rails, doors and window casings							
Length	**Point**	**Head**	**Finish**	**Coating**	**Collation**	**Box Count**	**Item Code**
1"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA13EPBN
1¼"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA15EPBN
1½"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA17EPBN
1¾"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA19EPBN
2"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA21EPBN
2¼"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	4M	DA23EPBN
2½"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	3M	DA25EPB
1½"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	0.7M (CS)	A301500
1¾"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	0.7M (CS)	A301750
2"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	0.7M (CS)	A302000
2½"	Chisel	Brad	Bright	Sencote	34° Angled Tape Strip	0.7M (CS)	A302500
1¼"	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	4M	DA15EABN
1½"	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	4M	DA17EABN
1¾"	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	4M	DA19EABN
2"	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	4M	DA21EABN
2½"	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	3M	DA25EAB
2"	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	0.7M (CS)	A302009
2½"	Chisel	Brad	Galv	Sencote	34° Angled Tape Strip	0.7M (CS)	A302509
2"	Chisel	Brad	Stainless 304	Plain	34° Angled Tape Strip	2M	DA21EGBN
2½"	Chisel	Brad	Stainless 304	Plain	34° Angled Tape Strip	1.2M	DA25EGB
1¼"	Diamond	Brad	Hardened*	Plain	34° Angled Tape Strip	4M	DA15AIA
1½"	Diamond	Brad	Hardened*	Plain	34° Angled Tape Strip	4M	DA17AIA
1¾"	Diamond	Brad	Hardened*	Plain	34° Angled Tape Strip	4M	DA19AIA

CS-Clamshell
*Hardened regular galvanized heat treated 15 Gauge for steel stud and trim applications
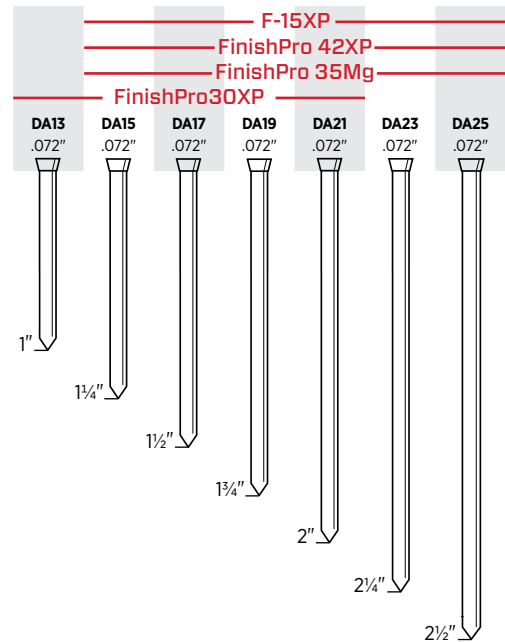
The Best Finish Nails in the Business.

SENCO® has the finish nails to meet all your finish and trim needs. In addition to offering a wide variety of fastener ranges and gauges, we provide a full line of tools to drive them.

FINISH & WOODWORKING FASTENERS

25

SENCO®

MAKING HARD WORK EASIER

19GA ¼" Crown Medium Wire Staples

Cabinets, drawers, soffits, lattice, casebacks						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
¾"	Chisel	Galv	Sencote	Glued	10M	K11BAB
⅞"	Chisel	Galv	Sencote	Glued	5M	K12BAB
1"	Chisel	Galv	Sencote	Glued	5M	K13BABN

SLS20XP-K

K11 ¼"　K12 ¼"　K13 ¼"

¾"　⅞"　1"

19GA ³⁄₁₆" Crown Medium Wire Staples

Cabinets, drawers, lattice, laminated hardwood flooring						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
½"	Blunt	Galv	Sencote	Glued	10M	R08BAB
⅝"	Blunt	Galv	Sencote	Glued	5M	R10BAB
¾"	Blunt	Galv	Sencote	Glued	5M	R11BAB
1"	Blunt	Galv	Sencote	Glued	5M	R13BAB
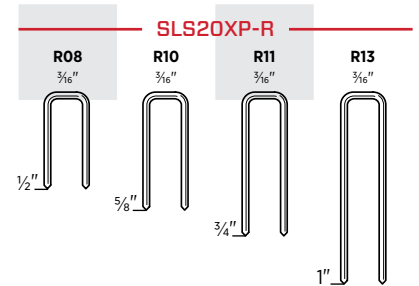
SLS20XP-R

R08 ³⁄₁₆"　R10 ³⁄₁₆"　R11 ³⁄₁₆"　R13 ³⁄₁₆"

½"　⅝"　¾"　1"

18GA **¼" Crown Medium Wire Staples**

Length	Point	Finish	Coating	Collation	Box Count	Item Code
¾"	Chisel	Bright	Sencote	Glued	5M	L11BRB
1"	Chisel	Bright	Sencote	Glued	5M	L13BRBN
1"	Chisel	Bright	Sencote	Glued	40M	L13BRBP
1⅛"	Chisel	Bright	Sencote	Glued	5M	L14BRB
1¼"	Chisel	Bright	Sencote	Glued	5M	L15BRB
⅜"	Chisel	Galv	Sencote	Glued	10M	L06BAB
⁷⁄₁₆"	Chisel	Galv	Sencote	Glued	24M	L07BABP
½"	Chisel	Galv	Sencote	Glued	10M	L08BAB
⅝"	Chisel	Galv	Sencote	Glued	5M	L10BABN
⅝"	Cross Cut	Galv	Sencote	Glued	5M	L10HABN
¾"	Chisel	Galv	Sencote	Glued	5M	L11BAB
¾"	Cross Cut	Galv¹	Sencote	Glued	5M	L11HBB
¾"	Cross Cut	Galv	Sencote	Glued	5M	L11HAB
⅞"	Chisel	Galv	Sencote	Glued	5M	L12BAB
⅞"	Chisel	Galv	Sencote	Glued	5M	L12BQB
1"	Chisel	Galv	Sencote	Glued	5M	L13BABN
1"	Cross Cut	Galv	Sencote	Glued	5M	L13HABN
1⅛"	Chisel	Galv	Sencote	Glued	5M	L14BAB
1¼"	Chisel	Galv	Sencote	Glued	5M	L15BAB
1½"	Chisel	Galv	Sencote	Glued	5M	L17BAB
⅝"	Chisel	Galv	Sencote	Glued	1.2M (CS)	A800629
¾"	Chisel	Galv	Sencote	Glued	0.9M (CS)	A800759
1"	Chisel	Galv	Sencote	Glued	0.9M (CS)	A801009
1¼"	Chisel	Galv	Sencote	Glued	0.7M (CS)	A801259
1½"	Chisel	Galv	Sencote	Glued	0.6M (CS)	A801509
½"–1½"	Chisel	Galv	Sencote	Glued	0.9M (CS)	A809909*
⅝"	Chisel	Stainless 304²	Plain	Glued	5M	L10BHA
¾"	Chisel	Stainless 304	Plain	Glued	5M	L11BGA
1⅛"	Chisel	Stainless 304	Plain	Glued	5M	L14BGA

¹ Galvanized High Tensile, ² Stainless 304 Steel High Tensile
CS-Clamshell, *Variety Pack

F-LXP
SLS18Mg, SLS20XP-L, SLS25XP-L
SLS150Mg
SKSXP-L

L06 ¼" ⅜" | L07 ¼" ⁷⁄₁₆" | L08 ¼" ½" | L10 ¼" ⅝" | L11 ¼" ¾"

F-LXP
SLS18Mg, SLS150Mg
SLS20XP-L, SLS25XP-L, SKSXP-L

L12 ¼" ⅞" | L13 ¼" 1" | L14 ¼" 1⅛" | L15 ¼" 1¼" | L17 ¼" 1½"

18 GA ⅜" Crown Medium Wire Staples

Length	Point	Finish	Coating	Collation	Box Count	Item Code
⅝"	Chisel	Bright	Sencote	Glued	5M	M10BRBN
¾"	Chisel	Bright	Sencote	Glued	5M	M11BRBN
1"	Chisel	Bright	Sencote	Glued	5M	M13BRB
⅜"	Chisel	Galv	Sencote	Glued	10M	M06BABN
½"	Chisel	Galv	Sencote	Glued	10M	M08BAB
⅝"	Chisel	Galv	Sencote	Glued	5M	M10BABN
¾"	Chisel	Galv	Sencote	Glued	5M	M11BABN
⅞"	Chisel	Galv	Sencote	Glued	5M	M12BAB
1"	Chisel	Galv	Sencote	Glued	5M	M13BAB
1¼"	Chisel	Galv	Sencote	Glued	10M	M15BAB
1½"	Chisel	Galv	Sencote	Glued	10M	M17BAB
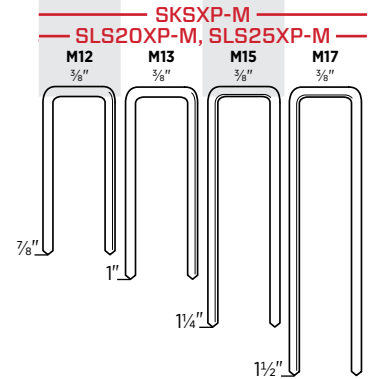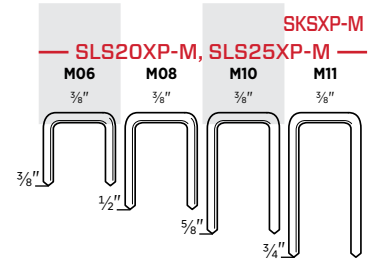
Cabinets, casebacks, drawers, upholstery, soffits, underlayment, lattice and sheathing

16 GA ⁷⁄₁₆" Crown Heavy Wire Staples

Cabinets, casebacks, drawers, upholstery, soffits, underlayment, lattice and sheathing

Length	Point	Finish	Coating	Collation	Box Count	Item Code
¾"	Chisel	Bright	Sencote	Glued	5M	N11BRB
1"	Chisel	Bright	Sencote	Glued	5M	N13BRB
1⅛"	Chisel	Bright	Sencote	Taped	10M	N14BRB
1¼"	Chisel	Bright	Sencote	Taped	10M	N15BRB
1⅜"	Chisel	Bright	Sencote	Taped	10M	N16BRB
1½"	Chisel	Bright	Sencote	Taped	10M	N17BRB
1⅝"	Chisel	Bright	Sencote	Taped	10M	N18BRB
1¾"	Chisel	Bright	Sencote	Taped	10M	N19BRB
2"	Chisel	Bright	Sencote	Taped	10M	N21BRB
½"	Chisel	Galv	Sencote	Taped	5M	N08BABN
½"	Chisel	Galv*	Sencote	Glued	5M	N08BBBN
½"	Diverg	Galv*	Sencote	Glued	5M	N08FBB
⅝"	Chisel	Galv	Sencote	Glued	5M	N10BAB
¾"	Chisel	Galv	Sencote	Glued	5M	N11BAB
¾"	Diverg	Galv*	Sencote	Glued	5M	N11FBB
⅞"	Chisel	Galv	Sencote	Glued	5M	N12BABN
⅞"	Diverg	Galv	Sencote	Glued	5M	N12FABN
1"	Chisel	Galv	Sencote	Glued	5M	N13BAB
1"	Diverg	Galv	Sencote	Glued	5M	N13FAB
1⅛"	Chisel	Galv	Sencote	Taped	10M	N14BAB
1¼"	Chisel	Galv	Sencote	Taped	10M	N15BAB
1¼"	Diverg	Galv	Sencote	Glued	10M	N15FAB
1⅜"	Chisel	Galv	Sencote	Taped	10M	N16BAB
1½"	Chisel	Galv	Sencote	Taped	10M	N17BAB
1⅝"	Chisel	Galv	Sencote	Taped	10M	N18BAB
1¾"	Chisel	Galv	Sencote	Taped	10M	N19BAB
2"	Chisel	Galv	Sencote	Taped	10M	N21BAB
1¼"	Chisel	Stainless 304	Sencote	Glued	3M	N15BGB
1½"	Chisel	Stainless 304	Sencote	Glued	3M	N17BGB
1¾"	Chisel	Stainless 304	Sencote	Glued	3M	N19BGBN
2"	Chisel	Stainless 304	Sencote	Glued	3M	N21BGBN

*Galvanized High Tensile

SKSXP-M
SLS20XP-M, SLS25XP-M
M06 ⅜" | M08 ⅜" | M10 ⅜" | M11 ⅜"
⅜" | ½" | ⅝" | ¾"

SKSXP-M
SLS20XP-M, SLS25XP-M
M12 ⅜" | M13 ⅜" | M15 ⅜" | M17 ⅜"
⅞" | 1" | 1¼" | 1½"

N08 ⁷⁄₁₆"
½"
SKSXP-N
N10 ⁷⁄₁₆" | N11 ⁷⁄₁₆" | N12 ⁷⁄₁₆" | N13 ⁷⁄₁₆" | N14 ⁷⁄₁₆"
⅝" | ¾" | ⅞" | 1" | 1⅛"

SKSXP-N
N15 ⁷⁄₁₆" | N16 ⁷⁄₁₆" | N17 ⁷⁄₁₆" | N18 ⁷⁄₁₆" | N19 ⁷⁄₁₆" | N21 ⁷⁄₁₆"
1¼" | 1⅜" | 1½" | 1⅝" | 1¾" | 2"

28

FINISH & WOODWORKING FASTENERS

25 GA Sencor® 1" Crown Corrugated Fastener

Butt and miter joints						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
¼"	Sharp Chisel	Bright	Plain	Glued	8M	X04NRA
⅜"	Sharp Chisel	Bright	Plain	Glued	5M	X06NRA
½"	Sharp Chisel	Bright	Plain	Glued	4M	X08NRA

SC2

X04 1"	X06 1"	X08 1"
¼"	⅜"	½"
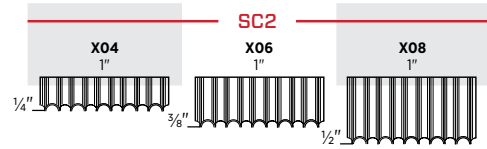
SENCOR®
CORRUGATED FASTENERS

Sencor corrugated fasteners provide twice the joint strength of ordinary fasteners. Available in 1″ crown and ¼″, ⅜″ and ½″ lengths to ensure maximum joint strength. Use this fastener for butt and miter joints, truss construction, wooden boxes, pallet repair, cabinet and furniture frames.

29

25 GA Senclamp® ⁷⁄₁₆" Crown Joint Fastener

Butt and miter joints						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
⁵⁄₁₆"	Chisel	Bright	Plain	Taped	3M	Y05BFA
⁷⁄₁₆"	Chisel	Bright	Plain	Taped	3M	Y07BFA
⁹⁄₁₆"	Chisel	Bright	Plain	Taped	3M	Y09BFAN

SC1XP

Y05 ⁷⁄₁₆"	Y07 ⁷⁄₁₆"	Y09 ⁷⁄₁₆"
⁵⁄₁₆"	⁷⁄₁₆"	⁹⁄₁₆"
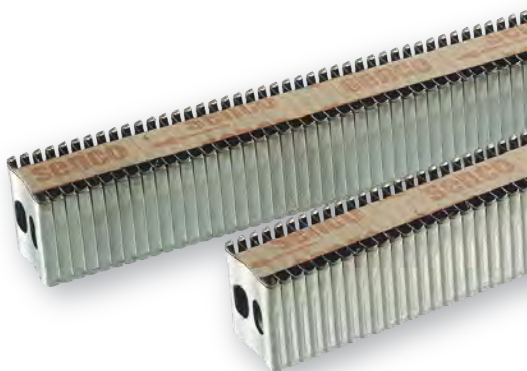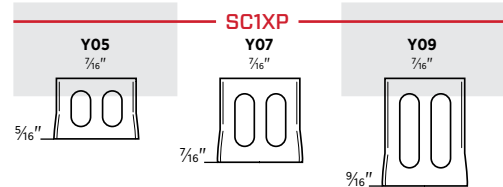
SENCLAMP®
JOINT FASTENERS

Senclamp has a special webbed design that draws the material together as it drives through it. Made from carbon steel, fasteners are available in ⁷⁄₁₆″ crown and ⁵⁄₁₆″, ⁷⁄₁₆″ and ⁹⁄₁₆″ lengths to best suit your requirements. Designed for a wide range of joint fastening applications, Senclamp secures joints better, faster and for less.

NAILING THE RIGHT BALANCE OF SIZE, WEIGHT AND POWER

We offer a large selection of pneumatic and cordless nailers for a wide variety of applications.

APPLICATIONS
Framing, sheathing, truss building, installing subflooring, decking or fencing, assembling boxes or making pallets

KEY FEATURES
- Low profile designs allow for easy access between studs and joists
- Highly efficient internal design for increased durability
- Dry fire lock out prevents dry firing and signals user when to reload
- Claw-like safety for precise toe-nailing

F-35XP
CORDLESS PNEUMATIC FRAMING NAILER

ITEM #10G0001N

34°

Features
• Fusion cordless air-power technology
• Pressure relief valve & refillable air port
• Brushless motor
• Includes 2 extended life batteries, quick charge battery charger and storage bag

F-35FRHXP
CORDLESS PNEUMATIC FRAMING NAILER

ITEM #10H0001N

20°

Features
• Fusion cordless air-power technology
• Pressure relief valve & refillable air port
• Brushless motor
• Includes 2 extended life batteries, quick charge battery charger and storage bag

Battery Platform
SENCO'S 18-Volt Li-Ion Battery System
Designed for long running times with quick recharges, the battery operates at full speed until depleted, so there is no gradual drop in power during use. Special LED fuel gauge displays battery life at the touch of a button. See the complete SENCO battery platform in the accessories section on page 77.

18V Li-Ion Battery 3.0 amp hour	Fits
VB0190	F-35XP F-35FRHXP
Battery Charger	**For use with**
VB0189	VB0190

31

Product Reference Chart

TOOL SPECS	F-35XP	F-35FRHXP
Trigger	Selectable	Selectable
Technology	Fusion	Fusion
Power Type	Cordless	Cordless
Battery	3.0Ah / 54Wh	3.0Ah / 54Wh
Weight (with Battery)	11.37 lbs (5.16 kg)	11.38 lbs (5.17 kg)
Height	14.4" (366 mm)	14.4" (366 mm)
Length	14.0" (356 mm)	14.6" (371 mm)
Width	5.5" (140 mm)	4.7" (119 mm)
Charge Time	80% in 30 minutes, 100% in 60 minutes.	
Warranty	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on pages 39–42	
Range	2"–3½"	2"–3½"
Shank	.113"–.148"	.113"–.131"
Capacity	60	35
Angle/Collation	30-34° Angled Paper Tape Strip	20-21° Angled Plastic Strip
Series	GC, GE, HC, HE, HF, KC ProHead G5, G6, H5, H6, K5, K6	GD, GL, HD, HL, KD, MD
TOOL FEATURES		
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free
Rafter Hook	Yes	Yes
Dry Fire Lockout	Yes	Yes

FN91T1
3½" PAPER TAPE FRAMING NAILER

34°

Features
• Best in class tool power & durability
• Well-balanced ergonomic design
• In-line magazine for optimal line of sight
• Aggressive toenail safety
• Tool-free depth of drive
• Engineered and Assembled in Cincinnati, Ohio

FN81T1
3½" FULL ROUND HEAD FRAMING NAILER

20°

Features
• Best in class tool power & durability
• Well-balanced ergonomic design
• In-line magazine for optimal line of sight
• Aggressive toenail safety
• Tool-free depth of drive
• Engineered and Assembled in Cincinnati, Ohio

The New Standard in Framing
The FN81T1 and FN91T1 deliver the power and durability demanded by professional contractors for all-day performance on the toughest jobsites. Upgraded features include an ergonomic design, an in-line magazine for clear line of sight, and a tool-free depth of drive for quick adjustments.

32

Product Reference Chart

TOOL SPECS	FN91T1	FN81T1
Trigger	Sequential	Sequential
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)
Air Consumption (60 CPM)	6.7 scfm	6.7 scfm
Air Inlet	⅜" NPT	⅜" NPT
Weight	8.39 lbs (3.8 kg)	8.75 lbs (3.9 kgs)
Height	14.13" (358 mm)	14.13" (358 mm)
Length	17.25" (438 mm)	20.75" (527 mm)
Width	4.88" (123 mm)	4.88" (123 mm)
Main Body Material	Aluminum	Aluminum
Warranty	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on pages 39–40	
Range	2" or 3½"	2" or 3½"
Shank	.113"–.135"	.113"–.148"
Capacity	80	70
Angle/Collation	30-34° Angled Paper Tape Strip	20-21° Angled Plastic Strip
Series	ProHead G5, H5, K5, G6, H6, K6 Clipped Head GC, GE, HC, HE, HF, KC, LC	GD, HD, KD, MD, GL, HL
TOOL FEATURES		
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free
Rafter Hook	Yes	Yes
Dry Fire Lockout	Yes	Yes

FramePro®325XP
3¼" PAPER TAPE FRAMING NAILER

ITEM #4Z0101N

34°

Features
• Patented TrueDrive magazine reduces jams and misfeeds
• Efficient internal design means less wear and tear on the compressor
• Claw-like toenail safety
• Fits easily between studs and joists

FramePro®701XP
3½" PAPER TAPE FRAMING NAILER

ITEM #2H0133N

34°

Features
• In-line magazine for optimal line of sight
• Simple two-step loading
• Claw-like toenail safety
• Fits easily between studs and joists

FramePro®751XP
3½" PAPER TAPE FRAMING NAILER

ITEM #2J0103N

34°

Features
• In-line magazine for optimal line of sight
• Simple two-step loading
• Claw-like toenail safety
• Fits easily between studs and joists

Magazine Retrofit Kit (Sold Separately)

Updated magazine options		
FITS TOOLS	**DESCRIPTION**	**ITEM #**
FramePro701XP	2-Nail Strip Magazine Retrofit Kit	YJ0055
FramePro701XP	Double Length Magazine Retrofit Kit	YJ0043
FramePro751XP	4" Nail Feed System Retrofit Kit	YJ0042

Product Reference Chart

TOOL SPECS	FramePro®325XP	FramePro®701XP	FramePro®751XP
Trigger	Selectable	Sequential	Sequential
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)
Air Consumption (60 CPM)	5.2 scfm	10 scfm	11 scfm
Air Inlet	⅜" NPT	⅜" NPT	⅜" NPT
Weight	7.9 lbs (3.58 kg)	8 lbs (3.62 kg)	8.4 lbs (3.8 kg)
Height	11.9" (302 mm)	13.25" (337 mm)	14.25" (362 mm)
Length	17.3" (440 mm)	15.13" (384 mm)	15.13" (384 mm)
Width	4.5" (114 mm)	4.17" (106 mm)	4.17" (106 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on pages 39–40		
Range	2"–3¼"	2"–3½"	2"–3½"
Shank	.113"–.148"	.113"–.135"	.113"–.148"
Capacity	83	70	70
Angle/Collation	30-34° Angled Paper Tape Strip	30-34° Angled Paper Tape Strip	30-34° Angled Paper Tape Strip
Series	GC, GE, HC, HE, HF, KC ProHead G5, G6, H5, H6, K5, K6	GC, GE, HC, HE, HF, KC ProHead G5, G6, H5, H6, K5, K6	GC, GE, HC, HE, HF, KC, LC ProHead G5, G6, H5, H6, K5, K6
TOOL FEATURES			
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	Yes, Tool-Free
Rafter Hook	Yes	Yes	Yes
Dry Fire Lockout	Yes	Yes	Yes

FramePro®325FRHXP
3¼″ FULL ROUND HEAD FRAMING NAILER

ITEM #4H0101N

`20°`

Features
• Patented TrueDrive magazine reduces jams and misfeeds
• Effective internal design means less wear and tear on the compressor
• Claw-like toenail safety
• Fits easily between studs and joists

FramePro®702XP
3½″ FULL ROUND HEAD FRAMING NAILER

ITEM #2K0103N

`20°`

Features
• 20° in-line magazine provides excellent maneuverability and line of sight
• Simple two-step loading
• Claw-like toenail safety
• Fits easily between studs and joists

FramePro®752XP
3½″ FULL ROUND HEAD FRAMING NAILER

ITEM #2F0103N

`20°`

Features
• 20° in-line magazine provides excellent maneuverability and line of sight
• Simple two-step loading
• Claw-like toenail safety
• Fits easily between studs and joists

Product Reference Chart

TOOL SPECS	FramePro®325FRHXP	FramePro®702XP	FramePro®752XP
Trigger	Selectable	Sequential	Sequential
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)
Air Consumption (60 CPM)	5.2 scfm	10 scfm	11 scfm
Air Inlet	⅜″ NPT	⅜″ NPT	⅜″ NPT
Weight	7.9 lbs (3.58 kg)	8.4 lbs (3.8 kg)	8.7 lbs (3.97 kg)
Height	11.9″ (302 mm)	13.25″ (337 mm)	14.25″ (362 mm)
Length	17.3″ (440 mm)	20″ (508 mm)	20″ (508 mm)
Width	4.5″ (114 mm)	4.17″ (106 mm)	4.17″ (106 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on page 41-42		
Range	2″–3¼″	2″–3½″	2″–3½″
Shank	.113″–.148″	.113″–.148″	.120″–.162″
Capacity	64	60	60
Angle/Collation	20-21° Angled Plastic Strip	20-21° Angled Plastic Strip	20-21° Angled Plastic Strip
Series	GD, GL, HD, HL, HK, KD, KL, MD	GD, GL, HD, HL, KD, MD	GD, GL, HD, HL, KD, MD
TOOL FEATURES			
Depth-of-Drive	Yes, Tool-Free	Yes- Tool Free	Yes, Tool-Free
Rafter Hook	Yes	Yes	Yes
Dry Fire Lockout	Yes	Yes	Yes

SCN60XP
2¾" COIL NAILER

ITEM #520101N

15°

Features
• High load capacity
• EZ-Load design saves time
• Fast cycle time increases productivity
• Lightweight for comfortable all-day use

SCN65XP
3½" COIL NAILER

ITEM #540101N - FLAT SAFETY; 540104N - TOENAIL SAFETY

15°

Features
• High load capacity
• EZ-Load design saves time
• Fast cycle time increases productivity
• Light and fast for greater productivity

Mini Hand Nailer
2"–3½" BULK NAILER

ITEM #PC1195

Features
• Compact and powerful enough to drive 2"–3½" bulk nails
• Magnetic nose holds nail in place for safe, accurate placement
• Ultra-light at just 1 pound

A20 Hand Nailer
2"–7" BULK NAILER

ITEM #PC0781

Features
• Drives bulk nails from 2"–7"
• Soft rubber palm pad for comfortable grip
• Magnetic nose holds nail in place for safe, accurate placement
• Includes leather strap for comfort

Product Reference Chart

TOOL SPECS	SCN60XP	SCN65XP	Mini Hand Nailer	A20 Hand Nailer
Trigger	Contact	Contact	—	—
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	60–110 psi (4–7.6 bar)	50–125 psi (3.5–8.4 bar)
Air Consumption (60 CPM)	8.29 scfm	9.54 scfm	2–4 scfm	2–4 scfm
Air Inlet	⅜" NPT	⅜" NPT	¼" NPT	⅜" NPT
Weight	7.5 lbs (3.4 kg)	8 lbs (3.6 kg)	1 lb (.45 kg)	2.4 lbs (1.1 kg)
Height	12.38" (314 mm)	14.1" (359 mm)	4" (101 mm)	5.8" (122 mm)
Length	12.88" (327 mm)	12.88" (327 mm)	2.75" (70 mm)	4" (101 mm)
Width	5.38" (137 mm)	5.38" (137 mm)	2" (55.6 mm)	3.25" (83 mm)
Main Body Material	Aluminum	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	1 yr	1 yr
FASTENER SPECS	Fasteners are located on pages 42–44			
Range	2"–2¾"	2"–3½"	Bulk nails from 2"–3½"	Bulk nails from 2"–3½" up to 7" with opt. guide tips
Shank	.099"–.113"	.099"–.131"	—	.113"–.148"
Capacity	250–275	225–275	1	1
Angle/Collation	15° Flat Wire Welded Coil	15° Flat Wire Welded Coil	—	—
Series	BK, BL, BT, GD, GL, HR	BJ, BK, BL, BT, GD, GL, HD, HK, HL, KD	—	—
TOOL FEATURES				
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	—	—
Rafter Hook	No	No	—	—
Dry Fire Lockout	No	No	—	—

JN91H1
1½" METAL CONNECTOR NAILER

`34°`

Features
• Lightweight and well-balanced for comfortable all day use
• Power to drive through engineered lumber
• Leads with the nail to locate metal connector holes, providing accurate nail placement
• Dry fire lockout reduces tool wear and indicates the need to reload fasteners

JN91H2
1½" METAL CONNECTOR NAILER

`34°`

Features
• Extended magazine holds two racks of nails
• Lightweight and well-balanced for comfortable all day use
• Power to drive through engineered lumber
• Leads with the nail to locate metal connector holes, providing accurate nail placement
• Dry fire lockout reduces tool wear and indicates the need to reload fasteners

JN91P1
1½"–2½" METAL CONNECTOR NAILER

`34°`

Features
• Lightweight and well-balanced for comfortable all day use
• Power to drive through engineered lumber
• Nosepiece probe locates metal connector holes, providing accurate nail placement
• Dry fire lockout reduces tool wear and indicates the need to reload fasteners

JN91P2
1½"–2½" METAL CONNECTOR NAILER

`34°`

Features
• Extended magazine holds two racks of nails
• Lightweight and well-balanced for comfortable all day use
• Power to drive through engineered lumber
• Nosepiece probe locates metal connector holes, providing accurate nail placement
• Dry fire lockout reduces tool wear and indicates the need to reload fasteners

36

Product Reference Chart

TOOL SPECS	JN91H1	JN91H2	JN91P1	JN91P2
Trigger	Sequential	Sequential	Sequential	Sequential
Operating Pressure	70–120 psi (4.8–8.3 bar)	70-120 psi (4.8 - 8.3 bar)	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8 - 8.3 bar)
Air Consumption (60 CPM)	4.4 scfm	4.4 scfm	6.4 scfm	6.4 scfm
Air Inlet	¼" NPT	¼" NPT	¼" NPT	¼" NPT
Weight	5.48 lbs (2.48 kg)	5.8 lbs (2.63 kg)	7.53 lbs (3.41 kg)	7.92 lbs (3.59 kg)
Height	12.5" (317 mm)	12.5" (317 mm)	14.38" (365 mm)	14.38" (365 mm)
Length	11.13" (282 mm)	17.86" (453 mm)	14" (355 mm)	19" (482 mm)
Width	4.38" (111 mm)	4.88" (123 mm)	5.25" (133 mm)	6.13" (155 mm)
Main Body Material	Magnesium	Magnesium	Magnesium	Magnesium
Warranty	5 yrs	5 yrs	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on page 45			
Range	1½"	1½"	1½"–2½"	1½"–2½"
Shank	.131"–.148"	.131"–.148"	.131"–.162"	.131"–.162"
Capacity	30	55	35	55
Angle/Collation	34° Paper Tape Strip	34° Paper Tape Strip	34° Paper Tape Strip	34° Paper Tape Strip
Series	KJ, MD	KJ, MD	KJ, MD, ND	KJ, MD, ND
TOOL FEATURES				
Depth-of-Drive	No	No	Yes	Yes
Rafter Hook	Yes	Yes	Yes	Yes
Dry Fire Lockout	Yes	Yes	Yes	Yes

SCP40XP
1½″ STANDARD PRESSURE PNEUMATIC CONCRETE & STEEL PINNER

ITEM #7J0001N

0°

Features
• 10 times faster than powder-actuated systems
• No licensing required to operate
• Works with conventional air compressors, hoses and fittings
• Operates at extreme temperatures and altitudes

PS20XP
1″ WIDE CROWN, 2″ HEAVY WIRE STAPLER

ITEM #9W0001N

16GA

Features
• Enhanced EZ-Clear™ latch allows for quick access to clear fasteners
• Updated aggressive locking feature provides superior holding power for complete control of the fastener, offering pinpoint accuracy and unrivaled driveability
• New drive track design eliminates movement of the staple, enhancing overall drive performance and virtually eliminating fastener jams, skipping and misfires

PS15XP
1″ WIDE CROWN, 1½″ HEAVY WIRE STAPLER

ITEM #9T0001N

16GA

Features
• Enhanced EZ-Clear™ latch allows for quick access to clear fasteners and a new locking feature offers pinpoint accuracy and unrivaled driveability
• Updated drive track eliminates staple movement, virtually eliminating jams
• Robust firing valve design makes the tool fast, powerful and efficient
• Positive-locking adjustable depth-of-drive ensures consistently flush drives

Concrete Pinner

Plaster, stucco & building wrap fastening attachment				
	Fits Tools	**Range**	**ITEM #**	
SENCO	SCP40XP	1¼″	NPC035	Magnetic washer nosepiece

Galvanized Metal Washer

ITEM #	Diameter	Box Count	Fits SCP40XP, GT40CP
SWM125B	1¼″	1M	.109″ Dia. Concrete Pins

Feed System Retrofit Kit (Sold Separately)

Updated feed system option	
CONVERTS	**ITEM #**
WC150 to PS15XP	YJ0044

37

Product Reference Chart

TOOL SPECS	SCP40XP	PS15XP	PS20XP
Trigger	Selectable	Contact	Contact
Operating Pressure	80–120 psi (5.5–8.3 bar)	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)
Air Consumption (60 CPM)	5.2 scfm	3.18 scfm	3.45 scfm
Air Inlet	⅜″ NPT	⅜″ NPT	⅜″ NPT
Weight	7.1 lbs (3.2 kg)	5.5 lbs (2.5 kg)	5.5 lbs (2.5 kg)
Height	12.22″ (310 mm)	9″ (229 mm)	10″ (254 mm)
Length	18.2″ (462 mm)	15.25″ (387 mm)	15.25″ (387 mm)
Width	4.5″ (114.4 mm)	5.5 lbs (2.5 kg)	3.5″ (89 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on pages 45–47		
Shank/Crown	.109″/.118″ Shanks	1″ Crown	1″ Crown
Range	½″–1½″	⅝″–1½″	⅞″–2″
Capacity	42	160	160
Angle/Collation	Straight Plastic Collated Strip	Taped and taped glued	Straight Glued and Taped Strip
Series	W3	P	P
TOOL FEATURES			
Depth-of-Drive	No	Yes, Tool-Free	Yes, Tool-Free
Belt Hook	No	Yes	Yes
Dry Fire Lockout	Yes	No	No

NS20XP
⁷⁄₁₆″ CROWN, 2″ HEAVY WIRE STAPLER

ITEM #9X0001N

17GA **16**GA

Features
• 15% more powerful than all other construction staplers in its class
• Enhanced EZ-Clear™ latch allows for quick access to clear fasteners
• Updated aggressive locking feature
• Drive track design eliminates movement of the staple
• Can also be used for vinyl siding installation (item number HC0788 required, sold separately)

NS20BXP
⁷⁄₁₆″ CROWN, HEAVY WIRE STAPLER

ITEM #9Y0001N

17GA **16**GA

Features
• 20% more powerful than the standard NS20XP for the most demanding applications
• Enhanced EZ-Clear™ latch allows for quick access to clear fasteners
• Updated aggressive locking feature
• Can also be used for vinyl siding installation (item number HC0788 required, sold separately)

SNS41
⁷⁄₁₆″ CROWN, 2″ HEAVY WIRE STAPLER

ITEM #3L0003N

17GA **16**GA

Features
• Durable construction minimizes downtime and operating costs
• EZ-Clear™ latch virtually eliminates downtime caused by fastener jams
• Fast, multidirectional stitching

SQS55XP
⁷⁄₁₆″ CROWN, 2½″ HEAVY WIRE STAPLER

ITEM #660101N

15GA

Features
• Fast — up to 15 staples per second
• EZ-Clear™ latch virtually eliminates downtime caused by fastener jams
• Rugged dependability

Product Reference Chart

TOOL SPECS	NS20XP	NS20BXP	SNS41	SQS55XP
Trigger	Contact	Contact	Contact	Contact
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)	80–120 psi (5.5–8.3 bar)	80–120 psi (5.5–8.3 bar)
Air Consumption (60 CPM)	3.5 scfm	3.98 scfm	5.4 scfm	6.54 scfm
Air Inlet	⅜″ NPT	⅜″ NPT	⅜″ NPT	⅜″ NPT
Weight	5.1 lbs (2.3 kg)	5.8 lbs (2.6 kg)	4.6 lbs (2.1 kg)	5.9 lbs (2.7 kg)
Height	11″ (279 mm)	11″ (279 mm)	10.75″ (273 mm)	12″ (305 mm)
Length	15″ (381 mm)	15″ (381 mm)	15″ (381 mm)	14.38″ (365 mm)
Width	3.5″ (89 mm)	4″ (102 mm)	3.4″ (86 mm)	3.6″ (92 mm)
Main Body Material	Aluminum	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on pages 46–47			
Crown	⁷⁄₁₆″	⁷⁄₁₆″	⁷⁄₁₆″	⁷⁄₁₆″
Range	1″–2″	1″–2″	1″–2″	1¼″–2½″
Capacity	160	160	160	130
Angle/Collation	Straight Glued and Taped Strip	Straight Glued and Taped Strip	Straight Glued and Taped Strip	Straight Glued and Taped Strip
Series	N, O	N, O	N, O	Q
TOOL FEATURES				
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free	Yes, Tool-Required	Yes, Tool-Required
Belt Hook	Yes	Yes	No	No
Dry Fire Lockout	No	No	No	No

34° ProHead® Smooth Paper Tape Nails

Framing, sheathing, subfloor, decks, trusses and pallets						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
2⅜" x .113"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	G524APBXN
3" x .120"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	H527APBXN
3¼" x .120"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	H528APBXN
2½" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2M	K525APBXN
3" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	K527APBXN
3" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	0.5M	K527APBXR
3¼" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	K528APBXN
3¼" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	0.5M	K528APBXR
3½" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	K529APBXN
2⅜" x .113"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	G524ASBXN
3" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	K527ASBXN
3¼" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	K528ASBXN
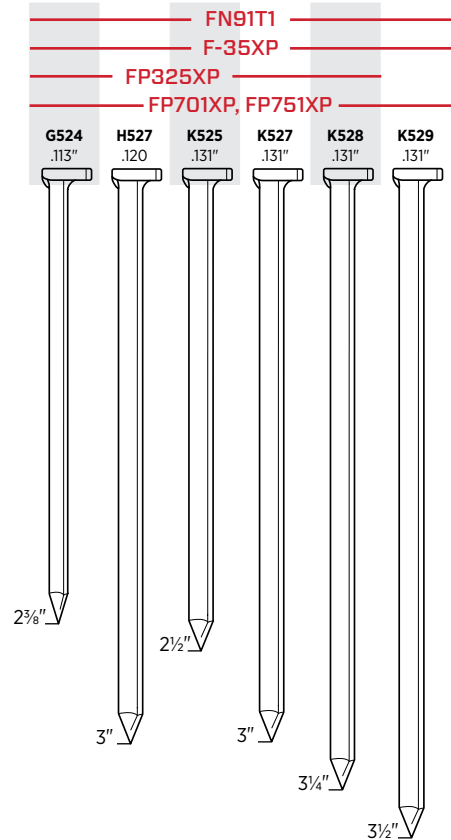
34° ProHead® Ring Paper Tape Nails

Framing, sheathing, subfloor, decks, trusses and pallets						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
2⅜" x .113"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	G624APBXN
3" x .120"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	H627APBXN
3¼" x .131"	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	K628APBXN
2" x .113"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	G621ASBXN
2⅜" x .113"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	G624ASBXN
3" x .120"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	H627ASBXN
3" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	K627ASBXN
3¼" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	K628ASBXN
3½" x .131"	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	K629ASBXN
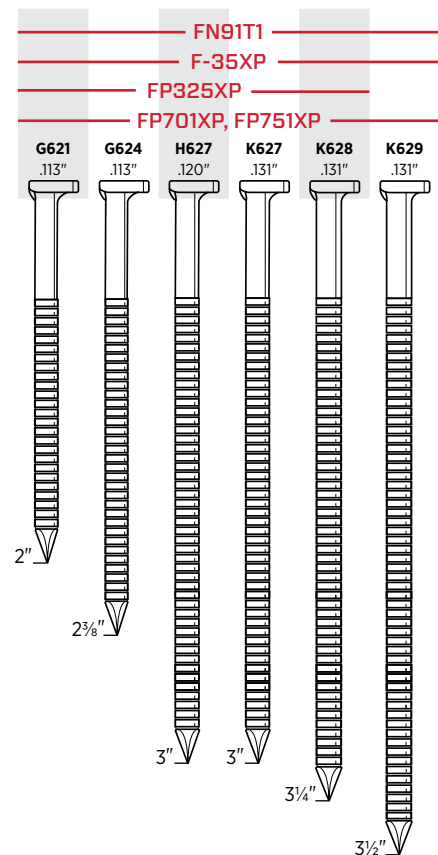
34° Smooth Shank Paper Tape Collated Nails

Framing, sheathing, subfloor, decks, trusses and pallets

Length	Point	Finish	Coating	Collation	Box Count	Item Code
2¼″ x .113″	Diamond	Bt. Hardened	Plain	34° Paper Tape Strip	1M	GC23AHAK
2″ x .113″	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	GC21APBX
2⅜″ x .113″	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	GC24APBX
2½″ x .113″	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	GC25APBX
3″ x .120″	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	HC27APBX
3¼″ x .120″	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	HC28APBX
3″ x .131″	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	KC27APBX
3¼″ x .131″	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	KC28APBX
3½″ x .131″	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	KC29APBX
3½″ x .135″	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	LC29APBX
4″ x .131″	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	KC31APBX*
2⅜″ x .113″	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	GC24ASBX
3″ x .120″	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	HC27ASBX
3″ x .131″	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	KC27ASBX
3¼″ x .131″	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	KC28ASBX
3½″ x .131″	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	KC29ASBX
3″ x .131″	Diamond	Stainless 304	Sencote	34° Paper Tape Strip	1M	KC27AGBK
3¼″ x .131″	Diamond	Stainless 304	Sencote	34° Paper Tape Strip	1M	KC28AGBK

*FramePro®751XP can drive 4 inch nails when fitted with the YJ0042 kit

CLIPPED HEAD

FN91T1
F-35XP
FP701XP
FP751XP*
FP325XP

GC21	GC23	GC24	GC25	HC27	KC27	HC28	KC28	KC29, LC29	KC31
.113″	.113″	.113″	.113″	.120″	.131″	.120″	.131″	.131″, .135″	.131″

2″
2¼″
2⅜″
2½″
3″ 3″
3¼″ 3¼″
3½″
4″

34° Ring Shank Paper Tape Collated Nails

Framing, sheathing, subfloor, decks, trusses and pallets

Length	Point	Finish	Coating	Collation	Box Count	Item Code
2″ x .113″	Diamond	Bright	Plain	34° Paper Tape Strip	2.5M	GE21APAX
2⅜″ x .113″	Diamond	Bright	Sencote	34° Paper Tape Strip	2.5M	GE24APBX
2″ x .113″	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	GE21ASBX
2⅜″ x .113″	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	GE24ASBX
3″ x .120″	Diamond	Hot Dip	Sencote	34° Paper Tape Strip	2.5M	HE27ASBX
2⅜″ x .113″	Diamond	Stainless 304	Sencote	34° Paper Tape Strip	1M	GE24AGBK

CLIPPED HEAD

FN91T1
F-35XP
FP701XP, FP751XP
FP325XP

GE21	GE24	HE27	HF27
.113″	.113″	.120″	.120″

2″
2⅜″
3″ 3″
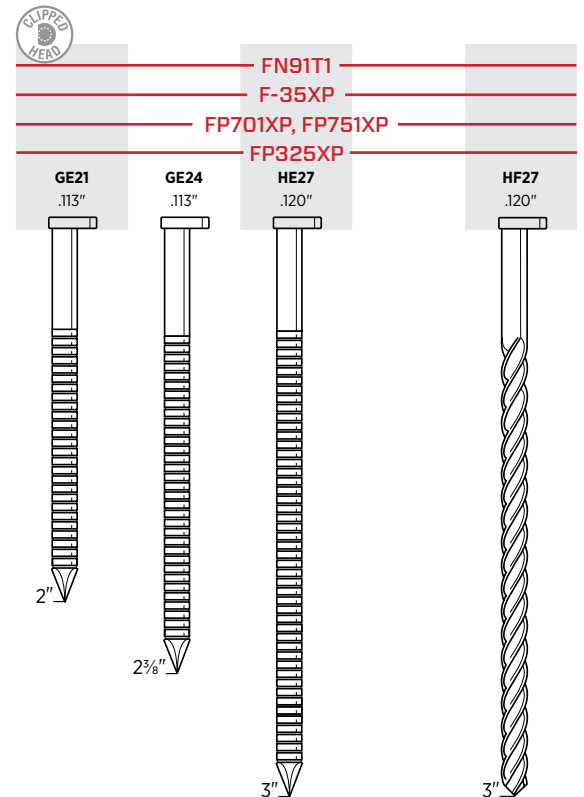
34° Screw Shank Paper Tape Collated Nails

Framing, sheathing, subfloor, decks, trusses and pallets

Length	Point	Finish	Coating	Collation	Box Count	Item Code
3″ x .120″	Chisel	Bright	Plain	34° Paper Tape Strip	3.1M	HF27EPAK
3″ x .120″	Chisel	Bright	Sencote	34° Paper Tape Strip	1M	HF27EDB

FRAMING, SHEATHING & SUBFLOOR FASTENERS
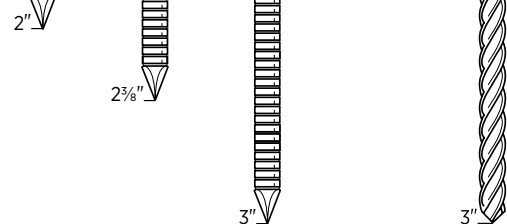
FRAMING, SHEATHING & SUBFLOOR FASTENERS

20° Smooth Shank Plastic Collated Nails

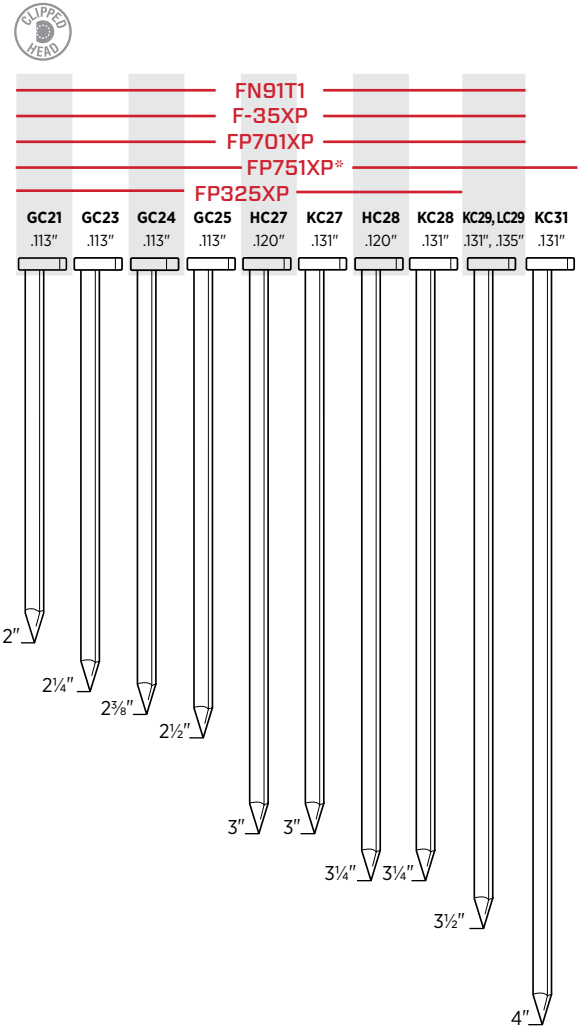### Framing, sheathing, subfloor, decks, trusses and pallets

Length	Point	Finish	Coating	Collation	Box Count	Item Code
2⅜" x .113"	Diamond	Bright	Sencote	20° Plastic Strip	5M	GD24APBSN
2½" x .113"	Diamond	Bright	Sencote	20° Plastic Strip	5M	GD25APBSN
2½" x .131"	Diamond	Bright	Sencote	20° Plastic Strip	4M	KD25APBSN
3" x .120"	Diamond	Bright	Sencote	20° Plastic Strip	4M	HD27APBSN
3" x .131"	Diamond	Bright	Sencote	20° Plastic Strip	4M	KD27APBSN
3" x .148"	Diamond	Bright	Sencote	20° Plastic Strip	4M	MD27APBSN
3¼" x .131"	Diamond	Bright	Sencote	20° Plastic Strip	4M	KD28APBSN
3¼" x .148"	Diamond	Bright	Sencote	20° Plastic Strip	4M	MD28APBSN
3½" x .131"	Diamond	Bright	Sencote	20° Plastic Strip	4M	KD29APBSN
2⅜" x .113"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	GD24ASBS
2½" x .113"	Diamond	Galv	Sencote	20° Plastic Strip	5M	GD25AABSN
2½" x .120"	Diamond	Exterior	Sencote	20° Plastic Strip	2.3M	HJ25ADBS*
2½" x .131"	Diamond	Galv	Sencote	20° Plastic Strip	2.5M	KD25AABS
3" x .131"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	KD27ASBS
3¼" x .131"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	KD28ASBS
3½" x .131"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	KD29ASBS
3¼" x .131"	Diamond	Stainless 304	Sencote	20° Plastic Strip	1M	KD28AGBS

*Roof tile nails, drive with FramePro® 725XP or SN952XP
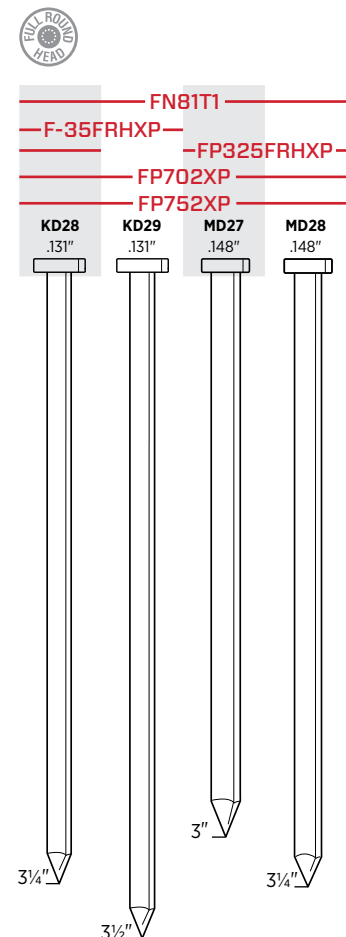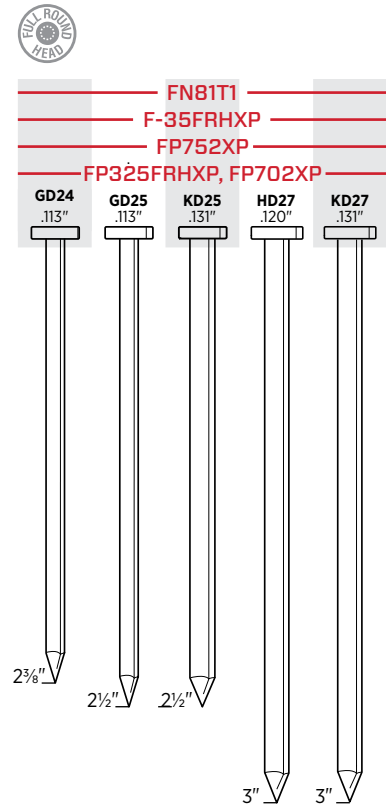
FRAMING, SHEATHING & SUBFLOOR FASTENERS

20° Ring Shank Plastic Collated Nails

Length	Point	Finish	Coating	Collation	Box Count	Item Code
Framing, sheathing, subfloor, decks, trusses and pallets						
2" x .113"	Diamond	Bright	Sencote	20° Plastic Strip	5M	GL21APBSN
2⅜" x .113"	Diamond	Bright	Sencote	20° Plastic Strip	5M	GL24APBSN
2" x .113"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	GL21ASBS
2⅜" x .113"	Diamond	Galv	Sencote	20° Plastic Strip	5M	GL24AABSN
2⅜" x .113"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	GL24ASBS
3" x .120"	Diamond	Hot Dip	Sencote	20° Plastic Strip	2.5M	HL27ASBS
2⅜" x .113"	Diamond	Stainless 304	Sencote	20° Plastic Strip	1M	GL24AGBS
3" x .120"	Diamond	Stainless 304	Sencote	20° Plastic Strip	1M	HL27AGBS

FN81T1
F-35FRHXP
FP752XP
FP325FRHXP, FP702XP

| GL21 .113" | GL24 .113" | HL27 .120" |

2"
2⅜"
3"
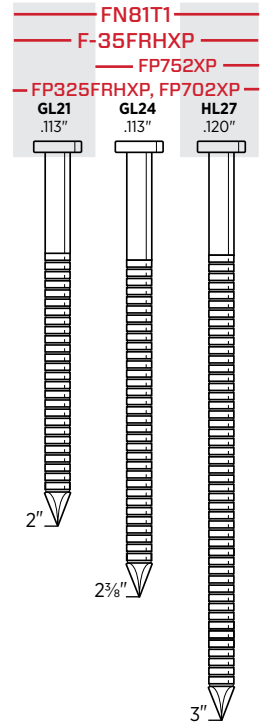
15° Ring Shank Subflooring Nails

Length	Point	Finish	Coating	Collation	Box Count	Item Code
Superior fastening in subfloor applications						
2" x .099"	Diamond	Bright Basic	Sencote	15° Flat Wire Welded Coil	6.6M	BT21APBF
2⅜" x .113"	Diamond	Bright Basic	Sencote	15° Flat Wire Welded Coil	4M	GT24APBF
2½" x .131"	Diamond	Bright Basic	Sencote	15° Flat Wire Welded Coil	4M	KT25APBF

SCN60XP, SCN65XP

| BT21 .099" | GT24 .113" | KT25 .131" |

2"
2⅜"
2½"

Subfloor and Sheathing Coil Nails

- Superior fastening in floor applications
- Tested and proven to reduce squeaky subfloors, uneven surfaces, and raised nail heads
- Unique double rings shank design reduces the potential of nails backing out, one of the most common flooring problems

42

15° Smooth Shank Coil Nails

Framing, sheathing, pallets, subfloor, decks and trusses

Length	Point	Finish	Coating	Collation	Box Count	Item Code
2″ x .113″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GD21APBF
2½″ x .113″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GD25APBF
2½″ x .131″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD25APBF
3″ x .120″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	4M	HD27APBF
3″ x .131″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD27APBF
3¼″ x .131″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD28APBF
3½″ x .131″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD29APBF
5″ x .148″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	1.8M	MD34APBF
2″ x .113″	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6M	GD21AABF
2½″ x .113″	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6M	GD25AABF
3″ x .131″	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	KD27ASBF
3¼″ x .131″	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	KD28ASBF

SCN60XP
SCN65XP

| GD21 .113″ | GD25 .113″ | KD25 .131″ | HD27 .120″ | KD27 .131″ | KD28 .131″ | KD29 .131″ | MD34 .148″ |

2″
2½″ 2½″
3″ 3″
3¼″
3½″
5″

15° Ring Shank Coil Nails

Framing, sheathing, pallets, subfloor, decks and trusses

Length	Point	Finish	Coating	Collation	Box Count	Item Code
2″ x .099″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6.6M	BL21APBF
2″ x .099″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6.6M	BT21APBF
2″ x .113″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GL21APBF
2⅜″ x .113″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GL24APBF
2¼″ x .099″	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6.6M	BE23AABF
2⅜″ x .113″	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.7M	GL24ASBF
3″ x .120″	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	HL27ASBF
2⅜″ x .113″	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	2.7M	GL24AGBF

SCN60XP
SCN65XP

| BL21 .099″ | BT21 .099″ | BE23 .099″ | GL21 .113″ | GL24 .113″ | HL27 .120″ |

2″
2″
2¼″
2″
2⅜″
3″

FRAMING, SHEATHING & SUBFLOOR FASTENERS

15° Screw Shank Coil Nails

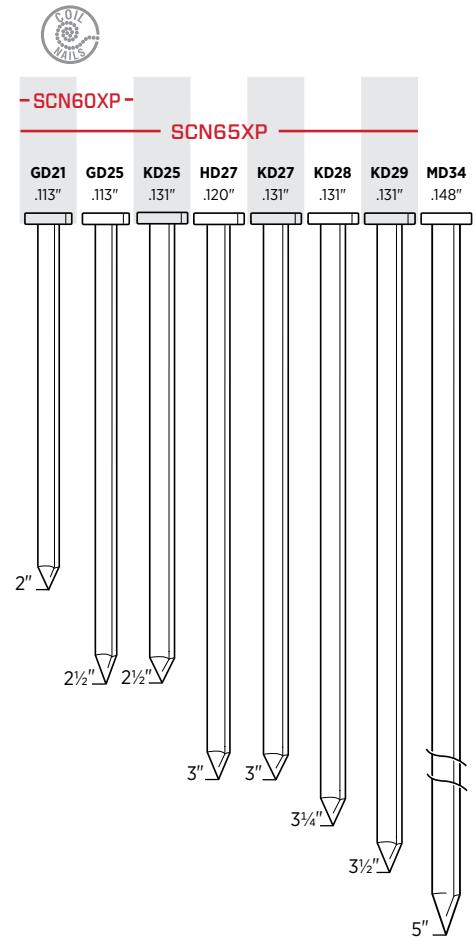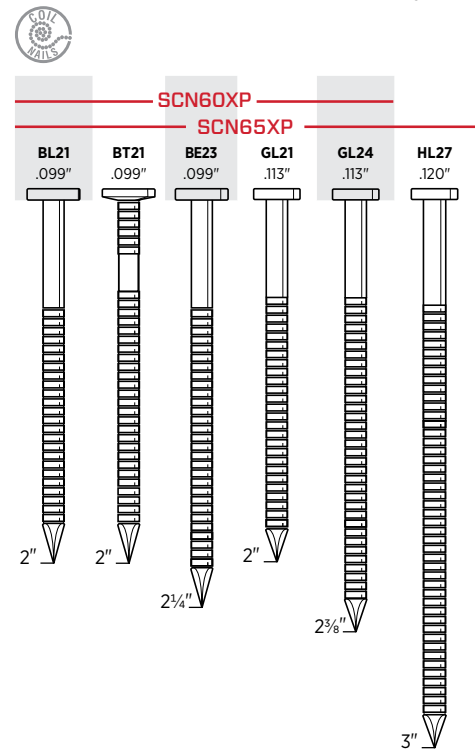| Framing, sheathing, pallets, subfloor, decks and trusses						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
2" x .099"	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	9M	BK21BPBFN
2¼" x .099"	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	9M	BK23BPBFN
2½" x .099"	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	6M	BK25BPBFN
3" x .120"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	4M	HK27APBFN

SCN60XP
SCN65XP

BK21 .099" BK23 .099" BK25 .099" HK27 .120"

2"   2¼"   2½"   3"

15° Smooth Shank Stiff-Stock Coil Nails

For fastening wood to masonry						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
1½" x .099"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3M	M003011

SCN65XP
M003011 .099"

SCN60XP
Modified*
HR22 .120"   HR74 .120"

1½"   2⅛"   2⅞"
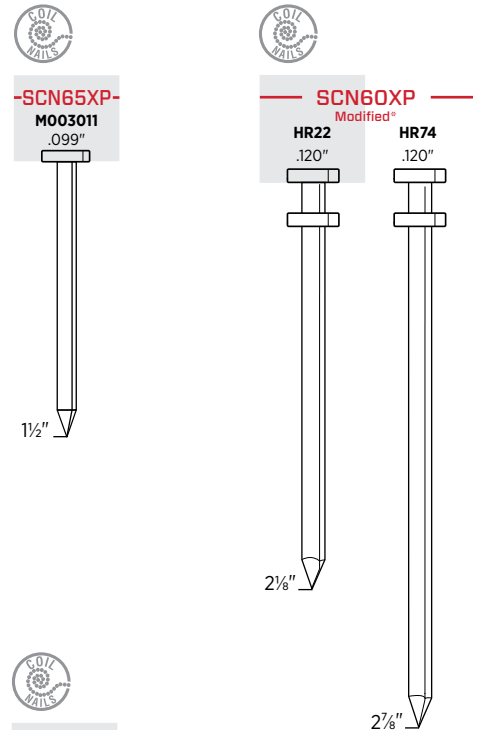
15° Duplex Smooth Shank Coil Nails*

Framing, trusses, crating and concrete forms						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
2⅛" x .120"	Diamond	Bright	Plain	15° Flat Wire Welded Coil	5.4M	HR22APAF
2⅞" x .120"	Diamond	Bright	Plain	15° Flat Wire Welded Coil	3.6M	HR74APAF

*Requires a special-order modified SCN60XP tool (order XA1739)

15° Drywall Ring Shank Bugle Head Coil Nails

For fastening drywall to wood						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
1½" x .099"	Diamond	Galv	Plain	15° Conical Wire Welded Coil	6.4M	BG17AAAQ
1⅝" x .099"	Diamond	Galv	Plain	15° Conical Wire Welded Coil	6.4M	BG18AAAQ

BG17 .099"   BG18 .099"

1½"   1⅝"
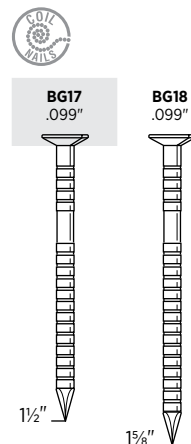
0° Collated Concrete and Steel Pins

For fastening drywall track, wood furring, hat channels, metal washers or ceiling grid to concrete, concrete block and steel

Length	Point	Finish	Coating	Collation	Box Count	Item Code
½" x .109"/.118"	Pinched	Zinc Plated	Plain	Straight Plastic Collated Strip	1M	W3050YXS
¾" x .109"	Pinched	Zinc Plated	Plain	Straight Plastic Collated Strip	1M	W3075YXC
1" x .109"	Pinched	Zinc Plated	Plain	Straight Plastic Collated Strip	1M	W3100YXC
1¼" x .109"	Pinched	Zinc Plated	Plain	Straight Plastic Collated Strip	1M	W3125YXC
1½" x .109"	Pinched	Zinc Plated	Plain	Straight Plastic Collated Strip	1M	W3150YXC
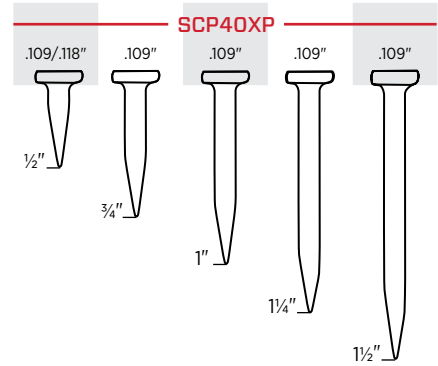
34° Hardened Metal Connector Nails

Joist hangers, foundation anchors, seismic and hurricane straps and ties

Length	Point	Finish	Coating	Collation	Box Count	Item Code
1½" x .148"	Diamond	Bright	Plain	34° Paper Tape Strip	3M	MD17AQBD
2½" x .148"	Diamond	Bright	Plain	34° Paper Tape Strip	2.5M	MD25AQBDN
2½" x .162"	Diamond	Bright	Plain	34° Paper Tape Strip	2M	ND25AQBDN
1½" x .148"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	3M	MD17AJBDN
2½" x .148"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	2.5M	MD25AJBDN
2½" x .162"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	2M	ND25AJBDN
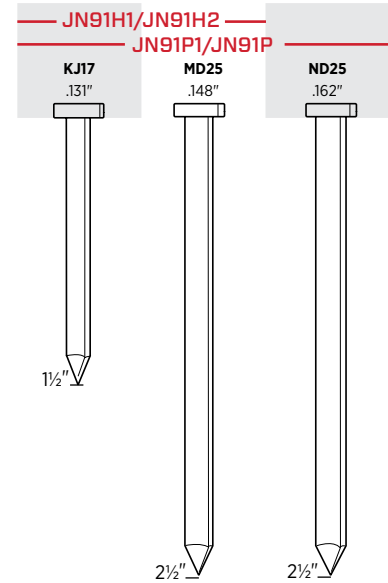
34° Heat Treated Metal Connector Nails

Joist hangers, foundation anchors, seismic and hurricane straps and ties

Length	Point	Finish	Coating	Collation	Box Count	Item Code
1½" x .131"	Diamond	Bright	Plain	34° Paper Tape Strip	2M	KJ17AHBD
2½" x .148"	Diamond	Bright	Plain	34° Paper Tape Strip	1.5M	MD25AHBD
1½" x .131"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	2M	KJ17AEBD

34° Non-Heat Treated Metal Connector Nails

Standard tensile, non-hardened nails for use in joist hangers, foundation anchors, seismic and hurricane straps and ties

Length	Point	Finish	Coating	Collation	Box Count	Item Code
1½" x .131"	Diamond	Bright	Plain	34° Paper Tape Strip	2M	M002261
1½" x .148"	Diamond	Bright	Plain	34° Paper Tape Strip	2M	M002263
2½" x .148"	Diamond	Bright	Plain	34° Paper Tape Strip	1.5M	M002265
1½" x .131"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	2M	M002262
1½" x .148"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	2M	M002264
2½" x .148"	Diamond	Hot Dip	Plain	34° Paper Tape Strip	1.5M	M002266
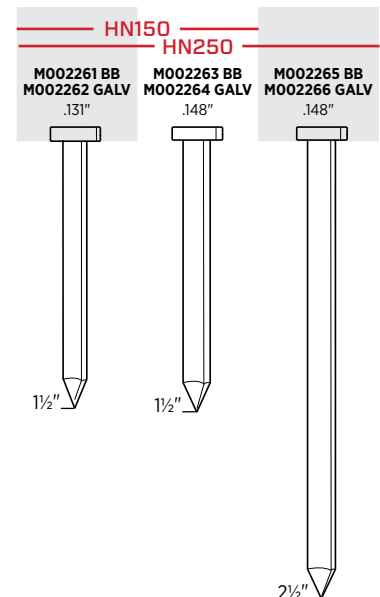
16 GA 1" Crown Heavy Wire Staples

Sheathing, house wrap, composite roofing, roofing felt, corrugated containers, foam insulation board, furniture/cabinet frames and butt joints						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
⅜″	Chisel	Galv	Plain	Glued	10M	P06BAA*
½″	Chisel	Galv	Sencote	Taped	10M	P08BABT*
⅝″	Chisel	Galv	Sencote	Taped	10M	P10BAB*
⅝″	Divergent	Galv	Sencote	Glued	10M	P10FAB*
⅝″	Chisel	Galv	Coated	Glued	10M	P10BPE*
¾″	Chisel	Galv	Sencote	Taped	10M	P11BAB
¾″	Chisel	Galv	Coated	Glued	10M	P11BPE
⅞″	Chisel	Galv	Sencote	Taped	10M	P12BAB
1″	Chisel	Galv	Sencote	Taped	10M	P13BAB
1″	Chisel	Galv	Sencote	Glued	10M	P13BPE
1¼″	Chisel	Galv	Sencote	Taped	10M	P15BAB
1¼″	Chisel	Galv	Coated	Glued	10M	P15BPE
1½″	Chisel	Galv	Sencote	Taped	10M	P17BAB
1¾″	Chisel	Galv	Sencote	Taped	5M	P19BAB
2″	Chisel	Galv	Sencote	Taped	5M	P21BAB
1″	Outside Chisel	Stainless 304	Sencote	Taped	5M	P13BGBN

*Use kit #YK0883 with PS15XP for ⅜″–⅝″ staples

PS15XP*
P06 1″ ⅜″
P08 1″ ½″
P10 1″ ⅝″

PS15XP
P08 1″ ½″
P10 1″ ⅝″
P11 1″ ¾″

PS15XP, PS20XP
P12 1″ ⅞″
P13 1″ 1″
P15 1″ 1¼″

PS20XP
PS15XP
P17 1″ 1½″
P19 1″ 1¾″
P21 1″ 2″
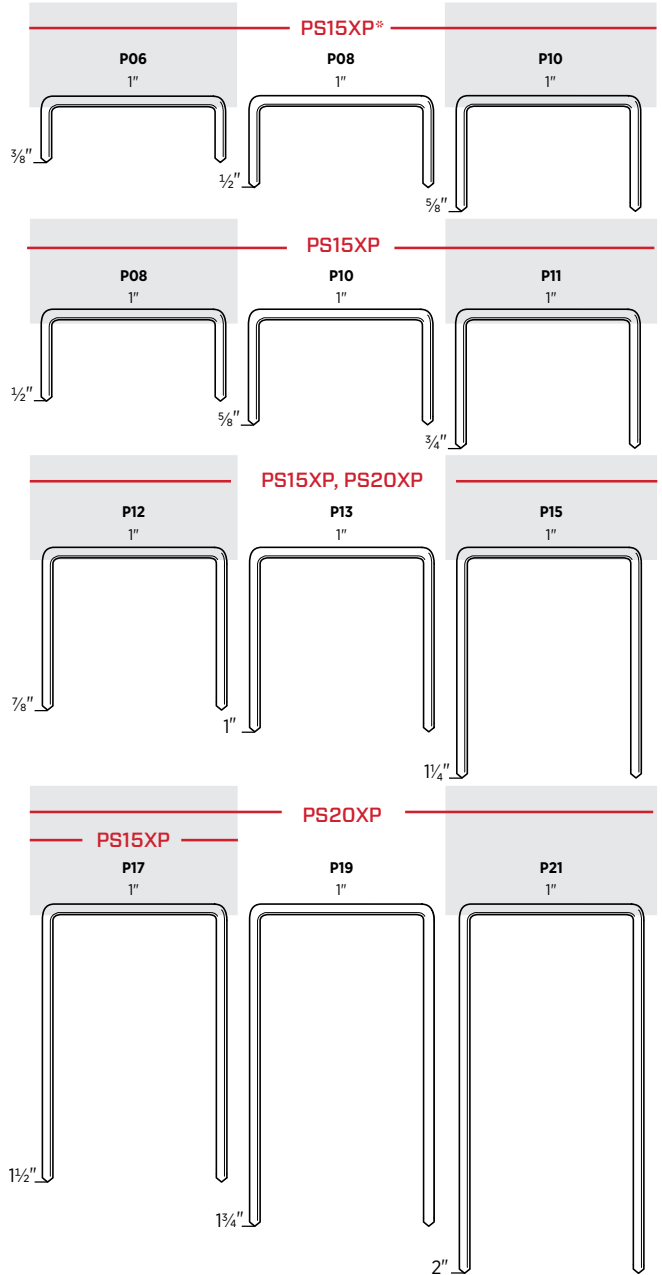
17 GA ⁷⁄₁₆″ Crown Heavy Wire Staples*

Sheathing, subfloor, furniture frames and crates						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
1¼″	Chisel	Bright	Sencote	Glued	21.12M	O15BRBBN
1⅜″	Chisel	Bright	Sencote	Glued	17.6M	O16BRBBN
1½″	Chisel	Bright	Sencote	Glued	17.6M	O17BRBBN
1⅝″	Chisel	Bright	Sencote	Glued	17.6M	O18BRBBN
1¾″	Chisel	Bright	Sencote	Glued	14.08M	O19BRBBN

*Compatible with NS20XP, NS20BXP, SNS200XP, SNS200XP-BST, SNS41 staplers manufactured after 09/2010. SNS44XP and SNS45XP staplers manufactured after 05/2010. For older tools, order upgrade kits SNS41-YK0794, SNS44-YK0793, SNS45-FA0186.

NS20XP, NS20BXP, SNS41
O15 ⁷⁄₁₆″ 1¼″
O16 ⁷⁄₁₆″ 1⅜″
O17 ⁷⁄₁₆″ 1½″
O18 ⁷⁄₁₆″ 1⅝″
O19 ⁷⁄₁₆″ 1¾″

16 GA 7/16" Crown Heavy Wire Staples

Sheathing, soffits, underlayment, lattice, cabinets, casebacks and drawers

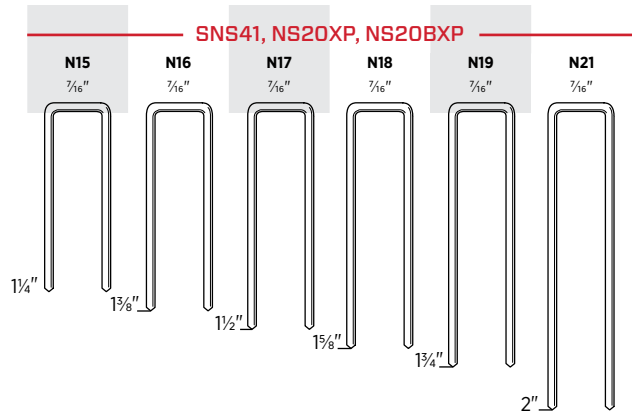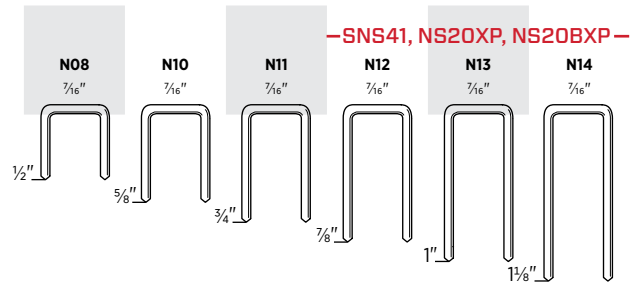| Length	Point	Finish	Coating	Collation	Box Count	Item Code
¾"	Chisel	Bright	Sencote	Glued	5M	N11BRB
1"	Chisel	Bright	Sencote	Glued	5M	N13BRB
1⅛"	Chisel	Bright	Sencote	Taped	10M	N14BRB
1¼"	Chisel	Bright	Sencote	Taped	10M	N15BRB
1⅜"	Chisel	Bright	Sencote	Taped	10M	N16BRB
1½"	Chisel	Bright	Sencote	Taped	10M	N17BRB
1⅝"	Chisel	Bright	Sencote	Taped	10M	N18BRB
1¾"	Chisel	Bright	Sencote	Taped	10M	N19BRB
2"	Chisel	Bright	Sencote	Taped	10M	N21BRB
½"	Chisel	Galv	Sencote	Glued	5M	N08BABN
½"	Chisel	Galv*	Sencote	Glued	5M	N08BBBN
½"	Diverg	Galv*	Sencote	Glued	5M	N08FBB
⅝"	Chisel	Galv*	Sencote	Glued	5M	N10BAB
¾"	Chisel	Galv	Sencote	Glued	5M	N11BAB
¾"	Diverg	Galv*	Sencote	Glued	5M	N11FBB
⅞"	Chisel	Galv	Sencote	Glued	5M	N12BABN
⅞"	Diverg	Galv	Sencote	Glued	5M	N12FABN
1"	Chisel	Galv	Sencote	Glued	5M	N13BAB
1"	Diverg	Galv	Sencote	Glued	5M	N13FAB
1⅛"	Chisel	Galv	Sencote	Taped	10M	N14BAB
1¼"	Chisel	Galv	Sencote	Taped	10M	N15BAB
1¼"	Diverg	Galv	Sencote	Glued	10M	N15FAB
1⅜"	Chisel	Galv	Sencote	Taped	10M	N16BAB
1½"	Chisel	Galv	Sencote	Taped	10M	N17BAB
1⅝"	Chisel	Galv	Sencote	Taped	10M	N18BAB
1¾"	Chisel	Galv	Sencote	Taped	10M	N19BAB
2"	Chisel	Galv	Sencote	Taped	10M	N21BAB
1¼"	Chisel	Stainless 304	Sencote	Glued	3M	N15BGB
1½"	Chisel	Stainless 304	Sencote	Glued	3M	N17BGB
1¾"	Chisel	Stainless 304	Sencote	Glued	3M	N19BGBN
2"	Chisel	Stainless 304	Sencote	Glued	3M	N21BGBN

*Galvanized High-Tensile Steel

—SNS41, NS20XP, NS20BXP—

N08 7/16" ½" · N10 7/16" ⅝" · N11 7/16" ¾" · N12 7/16" ⅞" · N13 7/16" 1" · N14 7/16" 1⅛"

SNS41, NS20XP, NS20BXP

N15 7/16" 1¼" · N16 7/16" 1⅜" · N17 7/16" 1½" · N18 7/16" 1⅝" · N19 7/16" 1¾" · N21 7/16" 2"

15 GA 7/16" Crown Heavy Wire Staples

Framing, sheathing, subflooring, decking, lathing, door and window units, fencing, pallets, crate and box assembly, furring and furniture framing

Length	Point	Finish	Coating	Collation	Box Count	Item Code
1½"	Chisel	Bright	Sencote	Taped	5M	Q17BRB
1¾"	Chisel	Bright	Sencote	Taped	5M	Q19BRB
2"	Chisel	Bright	Sencote	Taped	5M	Q21BRB
2¼"	Chisel	Bright	Sencote	Taped	5M	Q23BRB
2½"	Chisel	Bright	Sencote	Taped	5M	Q25BRB
1¼"	Chisel	Galv	Sencote	Taped	5M	Q15BAB
1½"	Chisel	Galv	Sencote	Taped	5M	Q17BAB
1¾"	Chisel	Galv	Sencote	Taped	5M	Q19BAB
2"	Chisel	Galv	Sencote	Taped	5M	Q21BAB
2½"	Chisel	Galv	Sencote	Taped	5M	Q25BAB
1¾"	Chisel	Stainless 304	Sencote	Taped	2.2M	Q19BGBN
2½"	Chisel	Stainless 304	Sencote	Taped	1M	Q25BGBN

SQS55XP

Q15 7/16" 1¼" · Q17 7/16" 1½" · Q19 7/16" 1¾" · Q21 7/16" 2" · Q23 7/16" 2¼" · Q25 7/16" 2½"
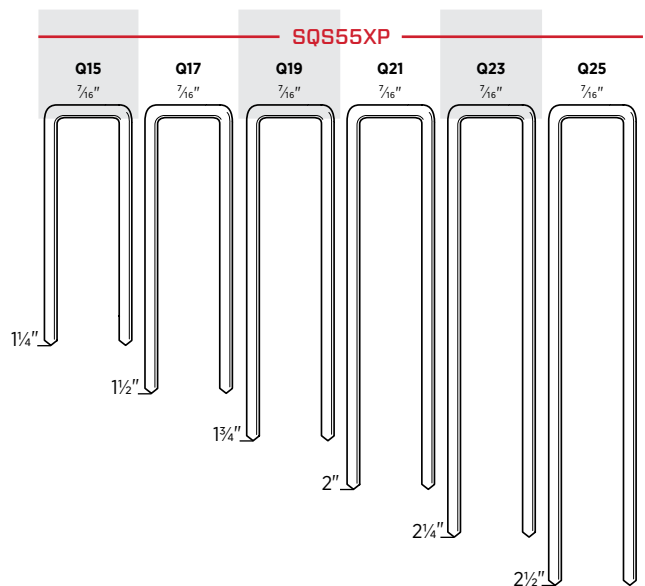
ROOFING, SIDING & FENCING

WE COVER IT ALL

When it comes to roofing applications or installing siding, uptime is everything. SENCO has designed a full line of tools and fasteners to maximize your productivity.

Our RoofPro™445XP with its innovative firing valve uses 5% less air. A bi-metal driver blade increases durability. And our power in, power out feed system is air driven for stability and speed.

APPLICATIONS

SENCO offers a variety of coil nailers and crown staplers with fasteners optimized for different types of shingles, siding, sheathing, and felt underlayment.

KEY FEATURES

- High-strength housings
- Long-lasting wear plates
- Easy, one-handed operation
- Adjustable depth-of-drive

RoofPro™445XP
1¾" COIL NAILER

ITEM #8V0001N

15°

Features
- Innovative firing valve reduces air consumption without compromising power or speed
- Bi-metal driver blade reduces wear and improves durability
- Power in, power out feed system improves speed and delivers consistent drives
- Metal wear plate in nail canister reduces wear and helps improve nail feed
- Adjustable and removable shingle guide

SN71P1
2½" COIL NAILER

15°

Features
- Dual collation – allows the choice between wire or plastic collation
- Tool-free depth of drive
- High load capacity (up to 375 nails)
- Overmold grip
- Rotatable rafter hook
- EZ-Load design

RoofPro™445XP
Blows the Roof off the Competition

It doesn't cost a bundle to drive the very best.

Building Code Approved

Professional Performance

Product Reference Chart

TOOL SPECS	RoofPro™445XP	SN71P1
Trigger	Contact	Selectable
Operating Pressure	70–120 psi (4.8–8.3 bar)	70–120 psi (4.8–8.3 bar)
Air Consumption (60 CPM)	3.86 scfm	4.6 scfm
Air Inlet	¼" NPT	⅜" NPT
Weight	5.2 lbs (2.35 kg)	5.58 lbs (2.53 kg)
Height	10.9" (276 mm)	12.75" (324 mm)
Length	10.6" (269 mm)	11.63" (295 mm)
Width	4.5" (114 mm)	5.06" (129 mm)
Main Body Material	Aluminum	Magnesium
Warranty	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on pages 51–52	
Range	¾"–1¾"	1¼"–2½"
Shank	.120"	.082"–.092"
Capacity	120	250–375
Angle/Collation	15° Flat Wire Welded Coil	15° Flat Wire Welded or Plastic Carrier Coil
Series	HJ, M00	ED, EJ, EL, SE
TOOL FEATURES		
Depth-of-Drive	Yes, Tool-Free	Yes, Tool-Free
Tool-Free Jam Clearing	Yes	Yes
Adjustable Exhaust	No	Yes

PS15RXP
1″ CROWN 1½″ ROOFING STAPLER
ITEM #9U0001N

16 GA

Features
- Enhanced EZ-Clear™ latch allows for quick access to clear fasteners
- New aggressive locking feature offers pinpoint accuracy and unrivaled driveability
- Updated drive track eliminates staple movement, virtually eliminating jams
- Positive-locking adjustable depth-of-drive ensures consistently flush drives
- Hardened wear plates and safety protect tool from shingle damage

BC58
½″ CROWN ⅝″ STAPLE + 1″ CAP
ITEM #4A0001N

21 GA

Features
- EZ-Load system for staples and caps
- Ultra-lightweight for ease of use and maneuverability
- Balanced and fast for greater productivity
- Side-mounted cap collator holds caps regardless of tool position

A11
⁷⁄₁₆″ CROWN ⅜″ HAMMER STAPLER
ITEM #PC0700

20 GA

Features
- Rugged all-steel construction
- Easy to service and maintain
- Comfortable fluted handle with grip

50

Product Reference Chart

TOOL SPECS	PS15RXP	BC58	A11
Trigger	Contact	Contact	—
Operating Pressure	70–120 psi (4.8–8.3 bar)	60–95 psi (4.1–6.5 bar)	—
Air Consumption (60 CPM)	3.18 scfm	.77 scfm	—
Air Inlet	⅜″ NPT	¼″ NPT	—
Weight	5.5 lbs (2.5 kg)	4.1 lbs (2 kg)	2 lbs (.9 kg)
Height	9″ (229 mm)	8.5″ (216 mm)	1.75″ (44.4 mm)
Length	15.25″ (387 mm)	12.5″ (317 mm)	12.3″ (312.4 mm)
Width	4″ (105 mm)	3.5″ (89 mm)	—
Main Body Material	Aluminum	Aluminum	Steel
Warranty	5 yrs	5 yrs	1 yr
FASTENER SPECS	Fasteners are located on page 53		
Gauge	16	21	20
Crown	1″	½″	⁷⁄₁₆″
Range	⅝″–1½″	⅝″ Galv.	⅜″
Capacity	160	110	168
Angle/Collation	Taped and taped glued	Glued Staple, Laser Welded Cap	Straight Glued Strip
Series	P	M004092, Cap	H
TOOL FEATURES			
Depth-of-Drive	Yes, Tool-Free	No	—
Tool-Free Jam Clearing	Yes	No	Yes
Adjustable Exhaust	No	Yes	—

15° Smooth Shank Coil Nails

Siding, asphalt and fiberglass shingles and vapor barriers

Length	Point	Finish	Coating	Collation	Box Count	Item Code
¾" x .120"	Diamond	Galv	Plain	15° Flat Wire Welded Coil	7.2M	M003101
1" x .120"	Diamond	Galv	Plain	15° Flat Wire Welded Coil	7.2M	M003103
1¼" x .120"	Diamond	Galv	Plain	15° Flat Wire Welded Coil	7.2M	M003104
1½" x .120"	Diamond	Galv	Plain	15° Flat Wire Welded Coil	7.2M	M003105
1¾" x .120"	Diamond	Galv	Plain	15° Flat Wire Welded Coil	7.2M	M003106

RoofPro445XP

| M003101 .120" | M003103 .120" | M003104 .120" | M003105 .120" | M003106 .120" |
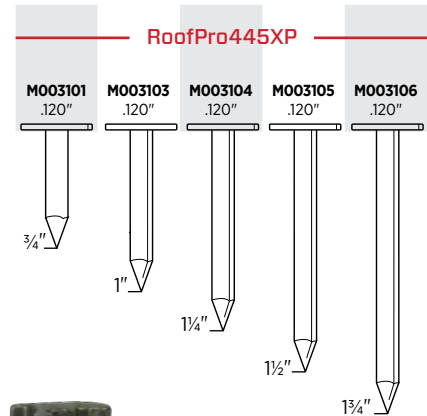
Vinyl Siding Attachment (Sold Separately)

Convert RoofPro™445XP and RoofPro™455XP into vinyl siding nailer	
Fits Tool	**Item Code**
RoofPro™445XP	HA0308
RoofPro™455XP	MA0013

15° Smooth Shank Coil Nails

Siding, packaging, fencing, pallets and underlayment

Length	Point	Finish	Coating	Collation	Box Count	Item Code
1½" x .099"	Diamond	Bright	Sencote	15° Plastic Carrier Coil	6M	BD17APBC
2" x .092"	Diamond	Exterior	Sencote	15° Flat Wire Welded Coil	7.2M	EJ21ADBH
2¼" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	ED23AABH
2¼" x .092"	Diamond	Exterior	Sencote	15° Conical Wire Welded Coil	7.2M	EJ23ADBH
2¼" x .092"	Diamond	Hot Dip	Sencote	15° Plastic Carrier Coil	3.6M	EJ23ASBC

SN71P1

| BD17 .099" | ED21, EJ21 .092" | ED23, EJ23 .092" |

15° Ring Shank Coil Nails

Length	Point	Finish	Coating	Collation	Box Count	Item Code
1¼" x .082"	Diamond	Bright	Sencote	15° Conical Wire Welded Coil	15M	SE15APB
1¼" x .082"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	14M	SE15APBH
1½" x .082"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	11.2M	SE17APBH
1¾" x .082"	Diamond	Bright	Sencote	15° Conical Wire Welded Coil	12M	SE19APB
1¾" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL19ASBH
1⅞" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	EL20AABH
1⅞" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL20ASBH
2" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL21ASBH
2¼" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	EL23AABH
2¼" x .092"	Diamond	Hot Dip	Sencote	15° Plastic Carrier Coil	3.6M	EL23ASBC
2¼" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL23ASBH
1¾" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL19AGBH
2" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL21AGBH
2¼" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL23AGBH

Siding, packaging, fencing, wood shingles, crating and pallets

SN71P1

SE15 .082"	SE17 .082"	SE19 .082"
1¼"	1½"	1¾"

SN71P1

EL19 .092"	EL20 .092"	EL21 .092"	EL23 .092"	EL25 .092"
1¾"	1⅞"	2"	2¼"	2½"

16 GA 1" Crown Heavy Wire Staples

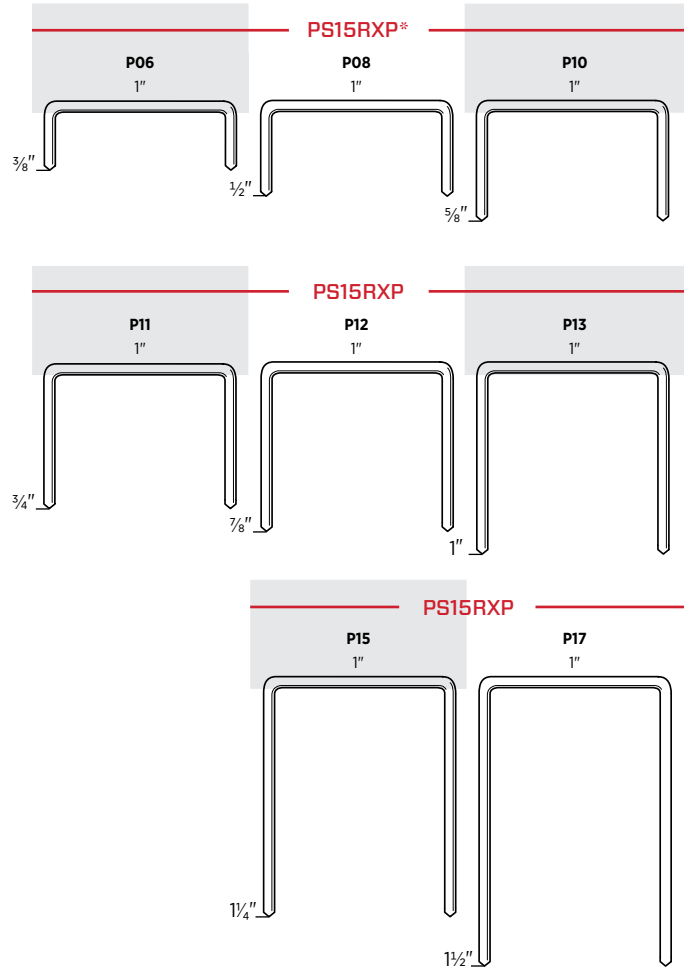| Length	Point	Finish	Coating	Collation	Box Count	Item Code
3/8"	Chisel	Galv	Plain	Glued	10M	P06BAA*
1/2"	Chisel	Galv	Sencote	Taped	10M	P08BABT*
5/8"	Chisel	Galv	Sencote	Taped	10M	P10BAB*
5/8"	Divergent	Galv	Sencote	Glued	10M	P10FAB*
5/8"	Chisel	Galv	Coated	Glued	10M	P10BPE*
3/4"	Chisel	Galv	Sencote	Taped	10M	P11BAB
3/4"	Chisel	Galv	Coated	Glued	10M	P11BPE
7/8"	Chisel	Galv	Sencote	Taped	10M	P12BAB
1"	Chisel	Galv	Sencote	Taped	10M	P13BAB
1"	Chisel	Galv	Sencote	Glued	10M	P13BPE
1¼"	Chisel	Galv	Sencote	Taped	10M	P15BAB
1¼"	Chisel	Galv	Coated	Glued	10M	P15BPE
1½"	Chisel	Galv	Sencote	Taped	10M	P17BAB
1"	Outside Chisel	Stainless 304	Sencote	Taped	5M	P13BGBN

Composite roofing, roofing felt, foam insulation board, house wrap, sheathing, corrugated containers, furniture/cabinets and butt joints

*Use kit #YK0883 with PS15RXP for 3/8"–5/8" staples

PS15RXP* — P06 1" / P08 1" / P10 1"

PS15RXP — P11 1" / P12 1" / P13 1"

PS15RXP — P15 1" / P17 1"

20 GA 7/16" Crown Fine Wire Staples

Length	Point	Finish	Coating	Collation	Box Count	Item Code
3/8"	Chisel	Galv	Plain	Glued	5M	H06BAA

Roofing, insulation and vapor barriers

A11 — H 7/16"

21 GA 1" Cap & ½" Crown Staples

Length	Point	Finish	Coating	Collation	Box Count	Item Code
5/8"	Chisel	Galv	Plain	Glued	2.2M	M004092
1"	—	Plastic	—	Laser Weld	2.2M	—

Roof felt installation and house wrap

BC58 — M004092 ½" / CAP 1"
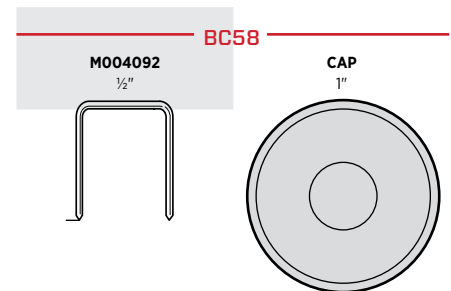
THE DURABILITY TO DRIVE ALL DAY

SENCO's PalletPro™ heavy-duty coil nailers are built specifically for the challenges of pallets and crating. The PalletPro130 can drive fasteners as long as 5⅛" and hold up to 225 nails.

APPLICATIONS
Pallets, crates, heavy-duty framing and truss attachment

KEY FEATURES
- Durable drivers and bumpers
- Flexible collation deflectors
- Dust guards for safe operation and extended use

Clinch and sisal anvil staple tools come in 18 and 20 gauge ½" and 7/16" crowns. Great for hand-held or mounted applications.

APPLICATIONS
Packaging, corrugated box fabrication, shoe making and bedding: basically any time two materials must be stapled and clinched together

FEATURES
- High-capacity magazines
- Extended reach capability
- Tool-free adjustable anvil opening
- Bottom-load magazines

PalletPro™57FXP
2¼" COIL NAILER

ITEM #4L0001N

15°

Features
- High load capacity
- Utra-durability driver and piston bumper for long life
- Adjustable nail canister accommodates wide range of nails
- Body protection — side steel wear plates reduce abrasion of tool

PalletPro™100XP
4" COIL NAILER (SPECIAL ORDER TOOL)

ITEM #5L0001N

15°

Features
- High load capacity
- Includes optional heavy-duty threaded T-handle
- Flexible collation deflector and dust guard for improved safety in commercial environments
- Strengthened driver and bumper for extended use and reliable service

PalletPro™130XP
5⅛" COIL NAILER (SPECIAL ORDER TOOL)

ITEM #5M0001N

15°

Features
- High load capacity
- Includes optional heavy-duty threaded T-handle
- Flexible collation deflector and dust guard for improved safety in commercial environments
- Strengthened driver and bumper for extended use and reliable service

Product Reference Chart

TOOL SPECS	PalletPro™57FXP	PalletPro™100XP	PalletPro™130XP
Trigger	Contact	Contact	Sequential
Operating Pressure	70–120 psi (4.9–8.4 bar)	70–120 psi (4.9–8.4 bar)	70–120 psi (4.9–8.4 bar)
Air Consumption (60 CPM)	3.07 scfm	11.4 scfm	11.4 scfm
Air Inlet	⅜" NPT	⅜" NPT	⅜" NPT
Weight	5.9 lbs (2.67 kg)	11.5 lbs (5.24 kg)	13 lbs (5.9 kg)
Height	11.25" (286 mm)	16.5" (418 mm)	18" (457 mm)
Length	11.88" (302 mm)	13.25" (338 mm)	13" (330 mm)
Width	5.25" (123 mm)	6" (153 mm)	6.6" (168 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on pages 58–59		
Range	1"–2¼"	2¼"–4"	3"–5⅛"
Shank	.082"–.092"	.099"–.148"	.120"–.148"
Capacity	300–350	225–300	120–225
Angle/Collation	15° Flat Wire Welded Coil	15° Flat Wire Welded Coil	15° Flat Wire Welded Coil
Series	BK, ED, EJ, EL, SE	BE, BK, BL, BT, HK, GD, GL, HD, HL, KD	HD, HK, HL, KD, MD
TOOL FEATURES			
Tool-Free Jam Clearing	Yes	Yes	Yes
Depth-of-Drive	No	No	No
Debris Shield	Yes	Yes	Yes

DFPXP

20 Ga. ½″ CROWN, ½″ STAPLE
CLINCH TOOL

ITEM #8H0001N

20GA

Features

- High-capacity magazine — less reloading means greater productivity
- Tool-free adjustable anvil opening
- Rubber comfort grip reduces vibration, slipping and fatigue
- Bottom-load magazine for quick reloading
- 6.9″ throat allows for extended reach into cartons

F75LXP

18 Ga. ⁷⁄₁₆″ CROWN, ⅝″ STAPLE
CLINCH TOOL

ITEM #8J0002N

18GA

Features

- High-capacity magazine — less reloading means greater productivity
- Tool-free adjustable anvil opening
- Rubber comfort grip reduces vibration, slipping and fatigue
- Bottom-load magazine for quick reloading
- 6.9″ throat allows for extended reach into cartons

F75SXP

18 Ga. ⁷⁄₁₆″ CROWN, ⅝″ STAPLE
SISAL ANVIL

ITEM #8J0001N

18GA

Features

- High-capacity magazine — less reloading means greater productivity
- Tool-free adjustable anvil opening
- Rubber comfort grip reduces vibration, slipping and fatigue
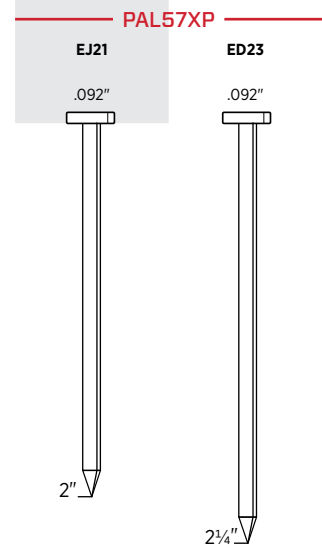- Bottom-load magazine for quick reloading

56

Product Reference Chart

TOOL SPECS	DFPXP	F75LXP	F75SXP
Trigger	Sequential	Sequential	Sequential
Operating Pressure	65–100 psi (4–7 bar)	65–100 psi (4–7 bar)	65–100 psi (4–7 bar)
Air Consumption (60 CPM)	.7 scfm	.7 scfm	.8 scfm
Air Inlet	¼″ NPT	¼″ NPT	¼″ NPT
Weight	4.9 lbs (2.24 kg)	4.9 lbs (2.24 kg)	4.9 lbs (2.24 kg)
Height	12.9″ (327 mm)	12.9″ (327 mm)	12.9″ (327 mm)
Length	14.9″ (380 mm)	14.9″ (380 mm)	14.9″ (380 mm)
Width	3″ (75 mm)	3″ (75 mm)	3″ (75 mm)
Main Body Material	Aluminum	Aluminum	Aluminum
Warranty	5 yrs	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on page 59		
Gauge	20	18	18
Crown	½″	⁷⁄₁₆″	⁷⁄₁₆″
Range	⁵⁄₁₆″–⅝″	⁵⁄₁₆″–⅝″	⁵⁄₁₆″–⅝″
Capacity	230	152	152
Angle/Collation	Straight Glued Strip	Straight Glued Strip	Straight Glued Strip
Series	F	J	J
TOOL FEATURES			
Tool-Free Adjustable Anvil Opening	Yes	Yes	Yes
Bottom-Load Magazine	Yes	Yes	Yes
Extended Reach Capability	Yes	Yes	No

PALLETS & CRATING FASTENERS

15° Smooth Shank Coil Nails
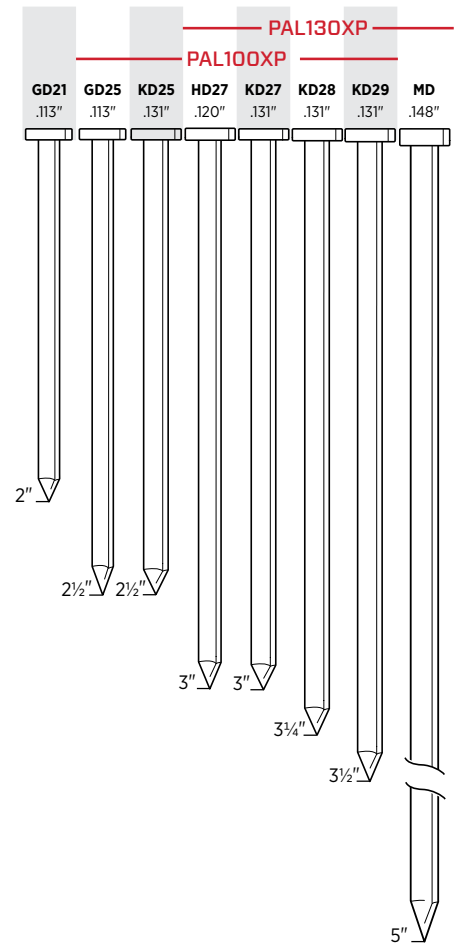
Pallets, crates, fencing, siding and underlayment

Length	Point	Finish	Coating	Collation	Box Count	Item Code
2″ x .092″	Diamond	Exterior	Sencote	15° Flat Wire Welded Coil	7.2M	EJ21ADBH
2¼″ x .092″	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	ED23AABH

PAL57XP
EJ21 .092″ ED23 .092″
2″ 2¼″

15° Smooth Shank Coil Nails

Pallets, framing, sheathing, subfloor, decks and trusses

Length	Point	Finish	Coating	Collation	Box Count	Item Code
2″ x .113″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GD21APBF
2½″ x .113″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GD25APBF
2½″ x .131″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD25APBF
3″ x .120″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	4M	HD27APBF
3″ x .131″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD27APBF
3¼″ x .131″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD28APBF
3½″ x .131″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	3.6M	KD29APBF
5″ x .148″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	1.8M	MD34APBF
2″ x .113″	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6M	GD21AABF
2½″ x .113″	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6M	GD25AABF
3″ x .131″	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	KD27ASBF
3¼″ x .131″	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	KD28ASBF

15° Ring Shank Coil Nails

**Pallets, crates, fencing, wood shingles, siding and underlayment**

Length	Point	Finish	Coating	Collation	Box Count	Item Code
1¼" x .082"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	14M	SE15APBH
1½" x .082"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	11.2M	SE17APBH
1¾" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL19ASBH
1⅞" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	EL20AABH
1⅞" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL20ASBH
2" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL21ASBH
2¼" x .092"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	3.6M	EL23AABH
2¼" x .092"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	3.6M	EL23ASBH
1¾" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL19AGBH
2" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL21AGBH
2¼" x .092"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	3.6M	EL23AGBH

15° Ring Shank Coil Nails
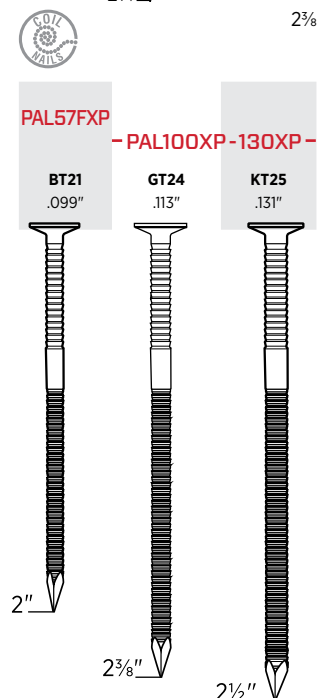
Pallets, framing, sheathing, subfloor, decks and trusses

Length	Point	Finish	Coating	Collation	Box Count	Item Code
2" x .099"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6.6M	BL21APBF
2" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GL21APBF
2⅜" x .113"	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	6M	GL24APBF
2¼" x .099"	Diamond	Galv	Sencote	15° Flat Wire Welded Coil	6.6M	BE23AABF
2⅜" x .113"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.7M	GL24ASBF
3" x .120"	Diamond	Hot Dip	Sencote	15° Flat Wire Welded Coil	2.4M	HL27ASBF
2⅜" x .113"	Diamond	Stainless 304	Sencote	15° Flat Wire Welded Coil	2.7M	GL24AGBF
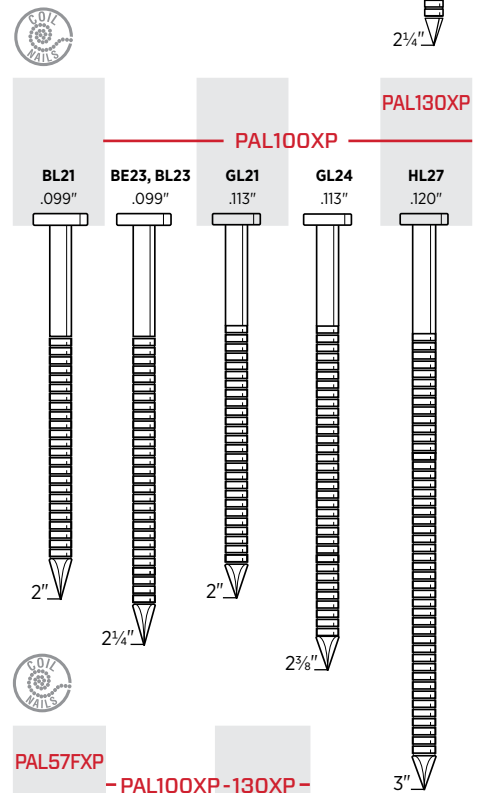
15° Step Ring Shank Nails

Superior fastening in subfloor applications

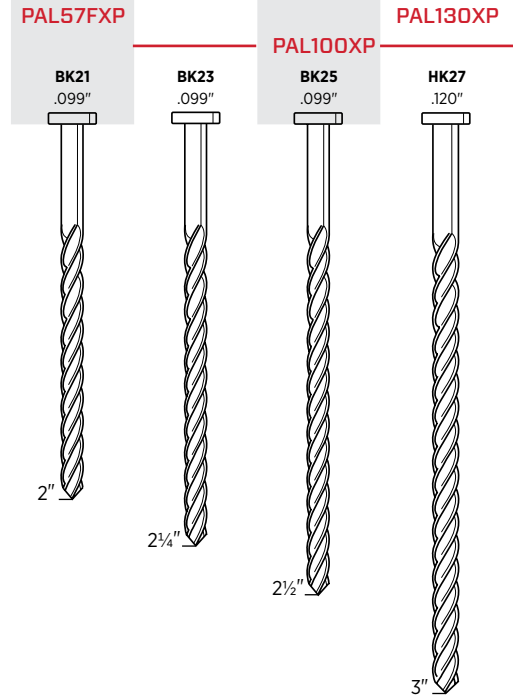| Length	Point	Finish	Coating	Collation	Box Count	Item Code
2" x .099"	Diamond	Bright Basic	Sencote	15° Flat Wire Welded Coil	6.6M	BT21APBF
2⅜" x .113"	Diamond	Bright Basic	Sencote	15° Flat Wire Welded Coil	4M	GT24APBF
2½" x .131"	Diamond	Bright Basic	Sencote	15° Flat Wire Welded Coil	4M	KT25APBF

Step Ring Pallet Coil Nails

- Superior fastening in pallet applications
- Tested and proven to reduce raised nail heads
- Unique double rings shank design reduces the potential of nail backing outs

PAL57XP

SE15 .082"	SE17 .082"	EL19 .092"	EL20 .092"	EL21 .092"	EL23 .092"

1¼" 1½" 1¾" 1⅞" 2" 2¼"

PAL130XP

PAL100XP

BL21 .099"	BE23, BL23 .099"	GL21 .113"	GL24 .113"	HL27 .120"

2" 2¼" 2" 2⅜" 3"

PAL57FXP

PAL100XP-130XP

BT21 .099"	GT24 .113"	KT25 .131"

2" 2⅜" 2½"

15° Screw Shank Coil Nails

Pallets, framing, sheathing, subfloor, decks and trusses						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
2″ x .099″	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	9M	BK21BPBFN
2¼″ x .099″	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	9M	BK23BPBFN
2½″ x .099″	Blunt Dia.	Bright	Sencote	15° Flat Wire Welded Coil	6M	BK25BPBFN
3″ x .120″	Diamond	Bright	Sencote	15° Flat Wire Welded Coil	4M	HK27APBFN

PAL57FXP

PAL100XP — PAL130XP

BK21 .099″	BK23 .099″	BK25 .099″	HK27 .120″

2″

2¼″

2½″

3″

20GA ½″ Crown Fine Wire Staples

Packaging, set-up boxes and bedding						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
⁵⁄₁₆″	Chisel	Galv	Sencote	Glued Strip	24M	F05BAAP
³⁄₈″	Chisel	Galv	Sencote	Glued Strip	10M	F06BAA
³⁄₈″	Chisel	Galv	Sencote	Glued Strip	24M	F06BAAP
½″	Chisel	Galv	Sencote	Glued Strip	10M	F08BAAN
½″	Chisel	Galv	Sencote	Glued Strip	15M	F08BAAP
³⁄₈″	Chisel	Stainless 304	Sencote	Glued Strip	10M	F06BGA

DFPXP

F05 ½″	F06 ½″	F08 ½″

¼″   ³⁄₈″   ½″
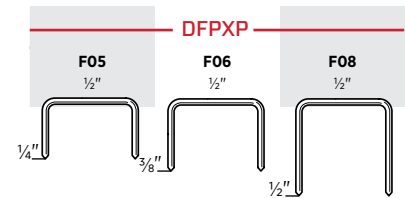
18GA ⁷⁄₁₆″ Crown Fine Wire Staples

For assembling packaging and joining corrugated materials						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
³⁄₈″	Chisel	Galv	Plain	Glued Strip	5M	J06BAA
½″	Chisel	Galv	Plain	Glued Strip	5M	J08BAAN
⁵⁄₈″	Chisel	Galv	Plain	Glued Strip	5M	J10BAAN

F75SXP, F75LXP

J06 ⁷⁄₁₆″	J08 ⁷⁄₁₆″	J10 ⁷⁄₁₆″

³⁄₈″   ½″   ⁵⁄₈″

59

UPHOLSTERY & FURNITURE
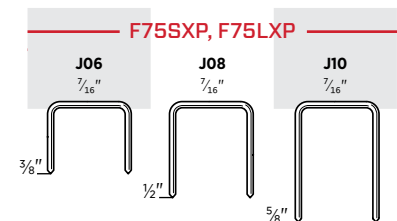
SENCO HAS YOU COVERED

SENCO offers a range of fine and medium wire staplers for upholstery and furniture assembly. Our upholstery staplers are the most customizable in the industry, with long nosepieces, extended magazines and a wide range of fasteners for any project.

APPLICATIONS
Upholstery, furniture assembly, cabinets, bedding, picture frames, molding, roof felt, house wrap, RV construction

KEY FEATURES
- Lightweight
- Ergonomic
- Variety of configurations

SFT10XP FAMILY
³⁄₁₆″, ³⁄₈″, ⁷⁄₁₆″, ½″ CROWN,
⅝″ FINE WIRE STAPLERS

SFT10XP

22GA **20**GA

Features
• Heavy-duty steel cap
• Short trigger stroke
• Rear exhaust keeps oil off fabric
• Automatic models have adjustable speed triggers

Models and Item Codes

Crown	Ga	Staple	Description	Item Code
³⁄₁₆″	22	A/D Wire	Standard	6S0001N
³⁄₁₆″	22	A/D Wire	Auto	6S0101N
½″	22	B Wire	Standard	6S0011N
³⁄₈″	22	C Wire	Standard	6S0021N
³⁄₈″	22	C Wire	Auto	6S0121N
³⁄₁₆″	20	E Wire	Standard	6S0031N
½″	20	F Wire	Standard	6S0041N
³⁄₈″	20	G Wire	Standard	6S0051N

SFT10XP FAMILY
³⁄₁₆″, ³⁄₈″, ⁷⁄₁₆″, ½″ CROWN,
⅝″ FINE WIRE STAPLERS

DOUBLE LENGTH MAGAZINE

22GA **20**GA

Features
• Heavy-duty steel cap
• Short trigger stroke
• Rear exhaust keeps oil off fabric
• Automatic models have adjustable speed triggers

Models and Item Codes

Crown	Ga	Staple	Description	Item Code
½″	22	B Wire	Standard	6S0211N
½″	22	B Wire	Auto	6S0311N
³⁄₈″	22	C Wire	Standard	6S0221N
³⁄₈″	22	C Wire	Auto	6S0321N
½″	20	F Wire	Auto	6S0341N
³⁄₈″	20	G Wire	Standard	6S0251N
⁷⁄₁₆″	20	H Wire	Auto	6S0361N

SFT10XP FAMILY
³⁄₁₆″, ³⁄₈″, ⁷⁄₁₆″, ½″ CROWN,
⅝″ FINE WIRE STAPLERS

LONG NOSE

22GA

Features
• Heavy-duty steel cap
• Short trigger stroke
• Rear exhaust keeps oil off fabric
• Automatic models have adjustable speed triggers

Models and Item Codes

Crown	Ga	Staple	Description	Item Code
³⁄₈″	22	C Wire	Standard	6S0421N

Product Reference Chart

TOOL SPECS	SFT10XP
Trigger	Sequential, Auto
Operating Pressure	60–95 psi (4.1–6.5 bar)
Air Consumption (60 CPM)	.77 scfm
Air Inlet	¼″ NPT
Weight	2.1 lbs (0.955 kg)
Height	6.57″ (167 mm)
Length	8.58″ (218 mm)
Width	1.65″ (42 mm)
Main Body Material	Aluminum
Warranty	5 yrs
FASTENER SPECS	Fasteners are located on pages 63–64
Gauge	22, 20
Crown	³⁄₁₆″, ³⁄₈″, ⁷⁄₁₆″, ½″
Range	¼″–⅝″
Capacity	110–92
Angle/Collation	Straight Glued Strip
Series	A, B, C, D, E, F, G, H

SENCO®

Stapling Upholstery for **Over 70 Years**

SENCO® offers 18 configurations of upholstery staplers and over 40 combinations of staple length, crown and gauge.

SFW09

⅜″ CROWN, ⅝″ FINE WIRE STAPLER

ITEM #4C0001N

22GA

Features
• Rear exhaust keeps oil off fabric
• Full 1″ lip length
• Rear magazine bumper protects fabric
• Rounded steel cap won't snag fabric

NS20BXP

⁷⁄₁₆″ CROWN, HEAVY WIRE STAPLER

ITEM #9Y0001N

17GA **16**GA

Features
• 20% more powerful than the standard NS20XP for the most demanding applications
• Enhanced EZ-Clear™ latch allows for quick access to clear fasteners
• Updated aggressive locking feature
• New drive track design eliminates movement of the staple

The NS20BXP is the Benchmark Stapler for the Furniture Industry.

• 20% more powerful than all other staplers in its class to handle even the toughest engineered woods.
• Drives both 16 and 17 gauge, ⁷⁄₁₆″ crown staples (1″ to 2″ in length).
• The combination of class-leading power, durability and ergonomics make it an unrivaled professional tool.

SENCO®

Product Reference Chart

TOOL SPECS	SFW09	NS20BXP
Trigger	Dual	Contact
Operating Pressure	60–95 psi (4.1–6.5 bar)	70–120 psi (4.8–8.3 bar)
Air Consumption (60 CPM)	.77 scfm	3.98 scfm
Air Inlet	¼″ NPT	⅜″ NPT
Weight	2.1 lbs (0.955 kg)	5.8 lbs (2.6 kg)
Height	6″ (152 mm)	11″ (279 mm)
Length	9.25″ (235 mm)	15″ (381 mm)
Width	1.63″ (41 mm)	4″ (102 mm)
Main Body Material	Aluminum	Aluminum
Warranty	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on pages 63, 65	
Gauge	22	17 (O-Wire), 16 (N-Wire)
Crown	⅜″	⁷⁄₁₆″
Range	⁵⁄₃₂″–⅝″	1″–2″
Capacity	110-168	160
Angle/Collation	Straight Glued Strip	Straight Glued/Taped Strip
Series	C	N, O

22GA ³⁄₁₆" Crown Fine Wire Staples

Furniture upholstery, felt, insulation, casebacks, screening and shoes						
Length	**Point**	**Finish**	**Coating**	**Collation**	**Box Count**	**Item Code**
¼"	Chisel	Galv	Sencote	Straight Glued Strip	10M	A04BAAN
³⁄₈"	Chisel	Galv	Sencote	Straight Glued Strip	30M	A06BABN
³⁄₈"	Chisel	Galv	Sencote	Straight Glued Strip	40M	A06BABP
½"	Chisel	Galv	Sencote	Straight Glued Strip	20M	A08BAB
½"	Chisel	Galv	Sencote	Straight Glued Strip	30M	A08BABP
⁵⁄₈"	Chisel	Galv	Sencote	Straight Glued Strip	20M	D10BABN
⁵⁄₈"	Chisel	Galv	Sencote	Straight Glued Strip	23M	D10BABPN
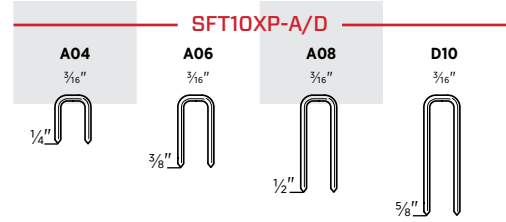
22GA ½" Crown Fine Wire Staples

Furniture upholstery, felt, insulation, casebacks, screening and shoes						
Length	**Point**	**Finish**	**Coating**	**Collation**	**Box Count**	**Item Code**
¼"	Chisel	Galv	Plain	Straight Glued Strip	25M	B04BAAPN
³⁄₈"	Chisel	Galv	Plain	Straight Glued Strip	40M	B06BAAP
½"	Chisel	Galv	Plain	Straight Glued Strip	25M	B08BAAP
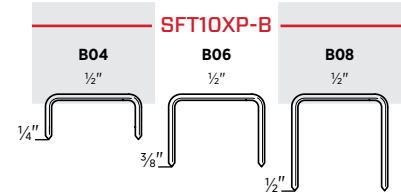
22GA ³⁄₈" Crown Fine Wire Staples

| Furniture upholstery, felt, insulation, casebacks, screening and shoes						
Length	**Point**	**Finish**	**Coating**	**Collation**	**Box Count**	**Item Code**
⁵⁄₃₂"	Chisel	Galv	Plain	Straight Glued Strip	60M	C02BAAPN
³⁄₁₆"	Chisel	Galv	Plain	Straight Glued Strip	55M	C03BAAPN
¼"	Chisel	Galv	Plain	Straight Glued Strip	35M	C04BAAP
⁵⁄₁₆"	Chisel	Galv	Plain	Straight Glued Strip	28M	C05BAAPN
³⁄₈"	Chisel	Galv	Plain	Straight Glued Strip	50M	C06BAAP
⁷⁄₁₆"	Chisel	Galv	Plain	Straight Glued Strip	40M	C07BAAPN
½"	Chisel	Galv	Plain	Straight Glued Strip	35M	C08BAAP
⁵⁄₈"	Chisel	Galv	Plain	Straight Glued Strip	27M	C10BAAP
³⁄₁₆"	Chisel	Stainless 304	Plain	Straight Glued Strip	25M	C03BGAN
¼"	Chisel	Stainless 304	Plain	Straight Glued Strip	25M	C04BGAN
³⁄₈"	Chisel	Stainless 304*	Plain	Straight Glued Strip	10M	C06BHA
³⁄₈"	Chisel	Stainless 304	Plain	Straight Glued Strip	10M	C06BGA

* High-Tensile 304 Stainless Steel
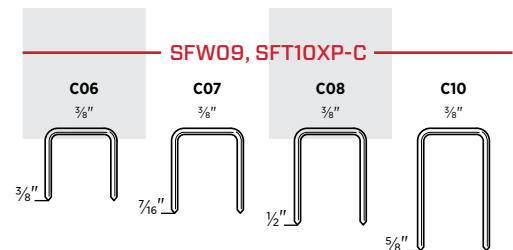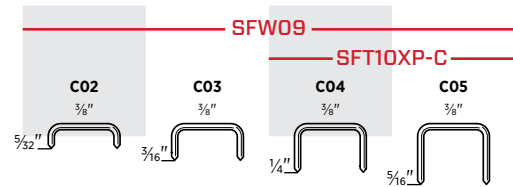
21GA ³⁄₁₆" Crown Fine Wire Staples

Furniture upholstery, felt, insulation, casebacks, screening and shoes						
Length	**Point**	**Finish**	**Coating**	**Collation**	**Box Count**	**Item Code**
⁵⁄₈"	Chisel	Galv	Sencote	Straight Glued Strip	10M	W10BAB

20GA ³⁄₁₆" Crown Fine Wire Staples

Furniture upholstery, felt, insulation, casebacks, screening and shoes						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
³⁄₈"	Chisel	Galv	Plain	Straight Glued Strip	10M	E06BAA
½"	Chisel	Galv	Plain	Straight Glued Strip	10M	E08BAA
⅝"	Chisel	Galv	Plain	Straight Glued Strip	5M	E10BAA
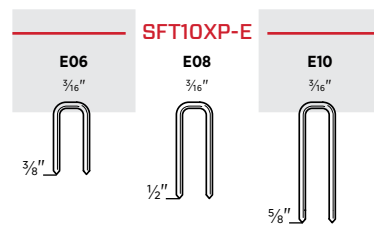
SFT10XP-E

E06 ³⁄₁₆" E08 ³⁄₁₆" E10 ³⁄₁₆"

³⁄₈" ½" ⅝"

20GA ½" Crown Fine Wire Staples

Upholstery, felt, insulation and casebacks						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
¼"	Chisel	Galv	Plain	Straight Glued Strip	10M	F04BAAN
¼"	Chisel	Galv	Plain	Straight Glued Strip	17M	F04BAAP
⁵⁄₁₆"	Chisel	Galv	Plain	Straight Glued Strip	24M	F05BAAP
³⁄₈"	Chisel	Galv	Plain	Straight Glued Strip	10M	F06BAA
³⁄₈"	Chisel	Galv	Plain	Straight Glued Strip	24M	F06BAAP
½"	Chisel	Galv	Plain	Straight Glued Strip	10M	F08BAAN
½"	Chisel	Galv	Plain	Straight Glued Strip	15M	F08BAAP
³⁄₈"	Chisel	Stainless 304	Plain	Straight Glued Strip	10M	F06BGA

SFT10XP-F

F04 ½" F05 ½" F06 ½" F08 ½"

¼" ⁵⁄₁₆" ³⁄₈" ½"
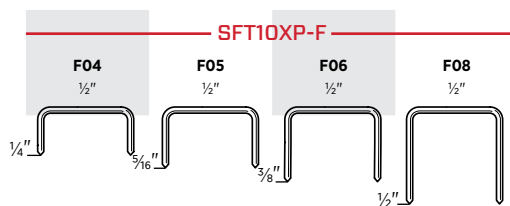
20GA ³⁄₈" Crown Fine Wire Staples

Upholstery, felt, insulation and casebacks						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
¼"	Chisel	Galv	Plain	Straight Glued Strip	10M	G04BAAN
³⁄₈"	Chisel	Galv	Plain	Straight Glued Strip	5M	G06BABN
½"	Chisel	Galv	Plain	Straight Glued Strip	5M	G08BAB
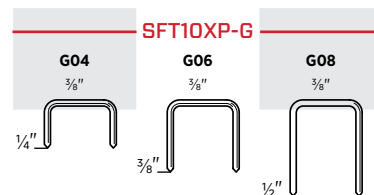
SFT10XP-G

G04 ³⁄₈" G06 ³⁄₈" G08 ³⁄₈"

¼" ³⁄₈" ½"

20GA ⁷⁄₁₆" Crown Fine Wire Staples

Upholstery, felt, insulation and casebacks						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
³⁄₈"	Chisel	Galv	Plain	Straight Glued Strip	5M	H06BAA

SFT10XP-H

H06 ⁷⁄₁₆"

³⁄₈"

17 GA ⁷⁄₁₆" Crown Heavy Wire Staples*

Furniture frames and crates							
Length	Point	Finish	Coating	Collation	Box Count	Item Code	
1¼"	Chisel	Bright	Sencote	Glued	21.12M	O15BRBBN	
1⅜"	Chisel	Bright	Sencote	Glued	17.6M	O16BRBBN	
1½"	Chisel	Bright	Sencote	Glued	17.6M	O17BRBBN	
1⅝"	Chisel	Bright	Sencote	Glued	17.6M	O18BRBBN	
1¾"	Chisel	Bright	Sencote	Glued	14.08M	O19BRBBN	

*Compatible with NS20XP, NS20BXP, SNS200XP, SNS200XP-BST, SNS41 staplers manufactured after 09/2010. SNS44XP and SNS45XP staplers manufactured after 05/2010. For older tools, order upgrade kits SNS41-YK0794, SNS44-YK0793, SNS45-FA0186.

16 GA ⁷⁄₁₆" Crown Heavy Wire Staples

Cabinets, casebacks, drawers and upholstery							
Length	Point	Finish	Coating	Collation	Box Count	Item Code	
¾"	Chisel	Bright	Sencote	Glued	5M	N11BRB	
1"	Chisel	Bright	Sencote	Glued	5M	N13BRB	
1⅛"	Chisel	Bright	Sencote	Taped	10M	N14BRB	
1¼"	Chisel	Bright	Sencote	Taped	10M	N15BRB	
1⅜"	Chisel	Bright	Sencote	Taped	10M	N16BRB	
1½"	Chisel	Bright	Sencote	Taped	10M	N17BRB	
1⅝"	Chisel	Bright	Sencote	Taped	10M	N18BRB	
1¾"	Chisel	Bright	Sencote	Taped	10M	N19BRB	
2"	Chisel	Bright	Sencote	Taped	10M	N21BRB	
½"	Chisel	Galv	Sencote	Glued	5M	N08BABN	
½"	Chisel	Galv*	Sencote	Glued	5M	N08BBBN	
½"	Diverg	Galv*	Sencote	Glued	5M	N08FBB	
⅝"	Chisel	Galv	Sencote	Glued	5M	N10BAB	
¾"	Chisel	Galv	Sencote	Glued	5M	N11BAB	
¾"	Diverg	Galv*	Sencote	Glued	5M	N11FBB	
⅞"	Chisel	Galv	Sencote	Glued	5M	N12BABN	
⅞"	Diverg	Galv	Sencote	Glued	5M	N12FABN	
1"	Chisel	Galv	Sencote	Glued	5M	N13BAB	
1"	Diverg	Galv	Sencote	Glued	5M	N13FAB	
1⅛"	Chisel	Galv	Sencote	Taped	10M	N14BAB	
1¼"	Chisel	Galv	Sencote	Taped	10M	N15BAB	
1¼"	Diverg	Galv	Sencote	Glued	10M	N15FAB	
1⅜"	Chisel	Galv	Sencote	Taped	10M	N16BAB	
1½"	Chisel	Galv	Sencote	Taped	10M	N17BAB	
1⅝"	Chisel	Galv	Sencote	Glued	10M	N18BAB	
1¾"	Chisel	Galv	Sencote	Taped	10M	N19BAB	
2"	Chisel	Galv	Sencote	Taped	10M	N21BAB	
1¼"	Chisel	Stainless 304	Sencote	Glued	3M	N15BGB	
1½"	Chisel	Stainless 304	Sencote	Glued	3M	N17BGB	
1¾"	Chisel	Stainless 304	Sencote	Glued	3M	N19BGBN	
2"	Chisel	Stainless 304	Sencote	Glued	3M	N21BGBN	

*Galvanized High-Tensile Steel

HARDWOOD FLOORING DONE RIGHT

Hardwood floors aren't so hard to install with our SHF200 stand-up flooring tool. With a long, ergonomic handle and a base that easily adjusts to any floor thickness, you will get your job done in no time. SENCO is committed to creating industry-leading flooring tools to make your job easier.

SHF200
2" PNEUMATIC MALLET ACTUATED HARDWOOD FLOORING CLEAT NAILER

ITEM #8D0001N

16GA

SLS20XP-HF
³⁄₁₆" CROWN, 1" ENGINEERED & HARDWOOD FLOOR STAPLER

ITEM #490021N

19GA

Features
- Innovative non-marring base that adjusts between ½" and ¾" flooring without the use of tools
- Safety trigger prevents accidental ejection of fasteners
- Lightweight and well balanced, yet 5% more powerful than competitive flooring nailers
- Extra-long ergonomic handle reduces user fatigue

Features
- Never-Lube® design — no oil required
- Front block easily adjusts to floor thickness
- Industry-exclusive safety controls staple placement
- Power-adjusted motor drives staples to consistent and controllable depth

67

Product Reference Chart

TOOL SPECS	SHF200	SLS20XP-HF
Trigger	Sequential	Sequential
Operating Pressure	90–110 psi (6.2–7.6 bar)	70–120 psi (4.8–8.3 bar)
Air Consumption (60 CPM)	2.52 scfm	1.92 scfm
Air Inlet	¼" NPT	¼" NPT
Weight	10.1 lbs (4.58 kg)	3.2 lbs (1.5 kg)
Height	21.5" (546 mm)	9" (228 mm)
Length	17.8" (452 mm)	13" (332 mm)
Width	3.1" (78 mm)	3" (76 mm)
Main Body Material	Aluminum	Aluminum
Warranty	5 yrs	5 yrs
FASTENER SPECS	Fasteners are located on page 68	
Gauge	16	19
Crown	L-Head	³⁄₁₆"
Range	1 ½"–2"	⅝"–1"
Capacity	107	168
Angled/Collation	Straight Glued Strip	Straight Glued Strip
Series	RW	R
FLOORING MATERIAL		
Hardwood	Yes	Yes
Hardwood Laminate	Yes	Yes
Board Thickness	½", ⅝", ¾", ³³⁄₃₂" (12–26 mm)	¼", ⁵⁄₁₆", ⅜" (6–10 mm)

16GA L-Head Flooring Cleat Nails

½", ⅝", ¾", ³³/₃₂" Solid hardwood flooring						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
1½"	Blunt Diamond	Bright	N/A	Straight Glued Strip	1M	RW17BPE
1¾"	Blunt Diamond	Bright	N/A	Straight Glued Strip	1M	RW19BPE
2"	Blunt Diamond	Bright	N/A	Straight Glued Strip	1M	RW21BPE
2"	Blunt Diamond	Stainless 304	N/A	Straight Glued Strip	1M	RW21BGE

SHF200

RW17	RW19	RW21
.063	.063	.063

1½" 1¾" 2"
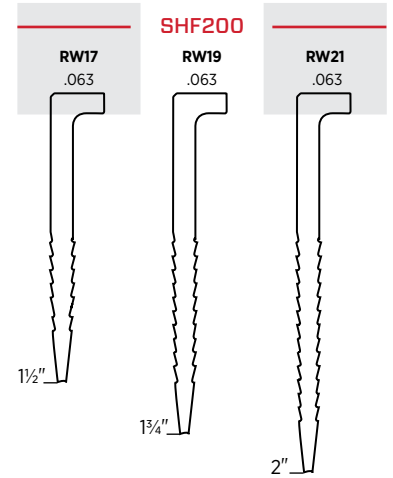
19GA ³/₁₆" Crown Flooring Staples

¼", ⁵/₁₆", ⅜" Engineered and hardwood floors						
Length	Point	Finish	Coating	Collation	Box Count	Item Code
⅝"	Chisel	Galv	Sencote	Straight Glued Strip	5M	R10BAB
¾"	Chisel	Galv	Sencote	Straight Glued Strip	5M	R11BAB
1"	Chisel	Galv	Sencote	Straight Glued Strip	5M	R13BAB

SLSXP-HF

R10	R11	R13
³/₁₆	³/₁₆	³/₁₆

⅝" ¾" 1"
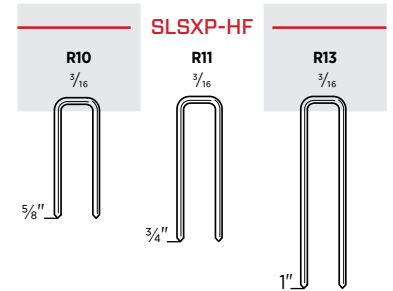
Get the Job Done.
With genuine SENCO compressors & accessories.

SENCO continuously strives to offer a wide selection of compressors, accessories, and parts to complete our full-line of fastening systems. Our commitment is to bring you the highest quality products to help you get the job done right.

COMPRESSORS
SENCO compressors are made to exacting standards. Only the highest quality components are used to provide the reliability expected from a SENCO product.

AIR HOSES
SENCO offers a wide variety of air hoses that allow you to choose the right solution for your job site. Our NEW Premium Hybrid hose provides the ultimate in flexibility and memory resistance, even in extremely cold temperatures. Quick Couple Rubber Hose is the standard for the professional on the job site with its tough flexible neoprene cover. ProFlex Reinforced Polyurethane Hose is the lightest weight non-marring flexible hose. PVC is resistant to lubricating oils, chemicals, and ultraviolet sunlight.

REGULATORS, GAUGES & LUBRICANTS
SENCO's assortments of regulators, gauges, oils and lubricants are chosen to satisfy the demanding requirements of the job site and deliver professional durability and quality. All will accurately replace the damaged component on SENCO units as well as many others.

PLUGS & COUPLERS
SENCO quick connect coupler and plug fittings are available in the most popular Industrial Interchange styles and sizes. Quick connect couplers are also available in the Universal style to work with other style plugs.

TOOL BELT HOOKS
SENCO offers a variety of belt hooks to allow the professional the ability to use both hands without worrying about dropping their pneumatic tool.

THE INNOVATION YOU'VE COME TO EXPECT, THE QUALITY YOU ALREADY KNOW

Whether you need an air compressor for punch-out jobs or for all-day performance, SENCO offers high quality, reliable options to meet your needs.

KEY FEATURES

SENCO has you covered with industry leading compressors that provide plenty of tank storage and air flow for the job site or professional shop. Many feature an oil-free pump design to reduce maintenance and have integrated panels that provide easy access to control knobs. There's even a compressor equipped with dual couplers so you can run two hoses simultaneously. Count on quickly getting back to work – we offer compressors that have pump up times of less than 40 seconds. You can easily monitor output pressure with individual tank and outlet gauges.

A full line of hoses and accessories is also available.

PC1131
2 HP (RUNNING) 4.3 GALLON
TWIN TANK AIR COMPRESSOR

Features
- Cast-iron cylinder for superior pump life
- Compact twin stack tank design
- Heavy-duty induction motor

PCO968
1 HP (RUNNING) 2½ GALLON TWIN TANK
FINISH AND TRIM AIR COMPRESSOR

Features
- Compact twin stack tank design
- Lightweight — 38 lbs
- Heavy-duty induction motor

PC1280
1½ HP (RUNNING) 6 GALLON
FINISH AND TRIM AIR COMPRESSOR

Features
- Compact and balanced pancake tank design
- Lightweight — 38 lbs
- Dual quick connect couplers

PC1010
½ HP (RUNNING) 1 GALLON
FINISH AND TRIM AIR COMPRESSOR

Features
- Ultra-quiet — 68 dBA
- Ultra-light — 20 lbs
- Heavy-duty induction motor

PC1010N
½ HP (RUNNING) 1 GALLON
FINISH AND TRIM AIR COMPRESSOR

Features
- Ultra-quiet — 68 dBA
- Ultra-light — 21 lbs
- Heavy-duty induction motor

PCO947
2″ FINISHPRO®18 BRAD NAILER
AND PC1010 COMPRESSOR KIT

18GA

Features
- 1 gallon PC1010 compressor
- 2″ 18 gauge brad nailer
- Everything you need to get started

71

Air Compressor Reference Chart

SPECS	PC1131	PCO968	PC1280	PC1010	PC1010N
Motor	Induction	Induction	Universal	Induction	Induction
Amps	14	8	12	4	4
Power Source	115 Volts	115 Volts	115 Volts	115 Volts	115 Volts
SCFM @ 90 PSI	4.4	2.2	2.8	0.7	0.7
Max PSI	125	135	150	135	135
Weight	60 lbs (27 kg)	38 lbs (17.24 kg)	38 lbs (17.24 kg)	20 lbs (9.07 kg)	21 lbs (9.53 kg)
Height	14.5″ (368 mm)	13.5″ (343 mm)	18″ (457 mm)	13″ (330 mm)	12.25″ (311 mm)
Length	20.5″ (521 mm)	16″ (406 mm)	17″ (432 mm)	14″ (356 mm)	11.5″ (292 mm)
Width	16.5″ (419 mm)	15″ (381 mm)	16.3″ (414 mm)	10″ (254 mm)	14″ (356 mm)
Warranty	1 yr	1 yr	1 yr	1 yr	1 yr
FEATURES					
Thermal Overload Protector	Yes	Yes	Yes	Yes	Yes
Pump	Oil-Lube	Oil-Free	Oil-Free	Oil-Free	Oil-Free
Pump Up/Recovery Time	67 sec./16 sec.	82 sec./17 sec.	152 sec./33 sec.	125 sec./30 sec.	125 sec./30 sec.
¼″ Quick Connect Coupler	1	1	2 (Dual)	1	1
Regulator	Yes	Yes	Yes	Yes	Yes
Individual Tank & Outlet Gauges	Yes	Yes	Yes	Yes	Yes
Cold Start Valve	Yes	No	No	No	No
CSA Approved	Yes	Yes	Yes	Yes	Yes

Tool Kit Ref. Chart

KIT SPECS	PCO947
Compressor	PC1010
Tool	FinishPro® 18
Trigger	Contact
Tool Operating Pressure	70–95 psi
Tool Air Inlet	¼″ NPT
Tool Weight	3 lbs (1.6 kg)
Tool Height	9.3″ (238 mm)
Tool Length	9.75″ (248 mm)
Kit Warranty	1 yr
Coil Hose	¼″ x 25′
Air Fittings	Yes
Tool Oil & Safety Glasses	Yes
Variety Pack of Fasteners	18 Ga. Brads
FASTENERS	
Gauge	18 Ga. Brads
Range	⅝″–2″

FILTERS, REGULATORS, LUBRICANTS, PLUGS, COUPLERS, HOSES, PART KITS AND MORE

SENCO offers an assortment of accessories that are precision engineered to meet the demanding requirements of professionals. Be sure that your tools and compressors are running at peak performance by using SENCO certified replacement parts, accessories, hoses, oils and lubricants.

Air Hoses

SENCO offers a wide variety of air hoses in various materials, sizes and specifications for your job site.

(FPT) - Female Pipe Thread
(MPT) - Male Pipe Thread

Quick Couple Rubber Hose

SENCO's premium air hoses:

- Can handle up to 250 psi working pressure
- Oil-resistant nitrile tube
- Braided textile reinforcing for max strength and kink resistance

- Remains flexible at temperatures from -40° to 200°F
- 4-to-1 working pressure to burst safety factor
- Tough, flexible neoprene cover

	Hose Size	Length	Qty.	ITEM #
Gray with Industrial Interchange Plug and Coupler Fittings	¼″	50 ft	1	PC0064
Gray with Industrial Interchange Plug and Coupler Fittings	¼″	100 ft	1	PC1152
Gray with Industrial Interchange Plug and Coupler Fittings	⅜″	50 ft	1	PC0065

GRAY WITH PLUG & COUPLER
PC0064, PC1152, PC0065

ProFlex™ Reinforced Polyurethane Red Air Hose

Lightest available non-marring flexible hose

- Flexible in all weather (-48° to 150°F)
- Working pressure: 250 psi

- Durable — oil and fuel resistant
- MPT-threaded ends

Description	Hose Size	Length	Qty.	ITEM #
ProFlex™ with MPT Ends (Use with FPT-Type Fittings)	¼″	50 ft	1	PC0977
ProFlex™ with MPT Ends (Use with FPT-Type Fittings)	¼″	100 ft	1	PC0978
ProFlex™ with MPT Ends (Use with FPT-Type Fittings)	⅜″	50 ft	1	PC0979

PROFLEX WITH MPT ENDS
PC0977, PC0978, PC0979

Premium Hybrid Polymer Air Hose

- Provides the ultimate in flexibility and memory resistance, even in extreme cold
- Offers the best combination of strength and flexibility on the market

Description	Hose Size	Length	Qty.	ITEM #
Hybrid with MPT Ends (Use with FPT-Type Fittings)	¼″	50 ft	1	PC1319
Hybrid with MPT Ends (Use with FPT-Type Fittings)	¼″	100 ft	1	PC1320
Hybrid Field-Repairable with MPT Ends (Use with FPT-Type Fittings)	¼″	50 ft	1	PC1321
Hybrid Field-Repairable with MPT Ends (Use with FPT-Type Fittings)	¼″	100 ft	1	PC1322
Hybrid Field-Repairable with MPT Ends (Use with FPT-Type Fittings)	⅜″	50 ft	1	PC1339

HYBRID WITH MPT ENDS
PC1319, PC1320

73

Field Repairable End Fitting

- Field repairable hose ends are made with aircraft aluminum for easy on-site repair without hose clamps

Description	Hose Size	Qty.	ITEM #
Hybrid Hose Repair End Fitting	¼″	1	PC1341
Hybrid Hose Repair End Fitting	⅜″	1	PC1337
Hybrid Hose Splicer	¼″	1	PC1338
Hybrid Hose Splicer	⅜″	1	PC1340

HYBRID HOSE FIELD REPAIR KITS
END FITTING AND HOSE SPLICER KITS

Plugs & Couplers

Quick connect plugs and couplers are available in the most popular Industrial Interchange styles. Couplers are also available in Universal style.

Universal Couplers — push plug into coupler (no need to pull back on sleeve)				
Type	Body Size	NPT Size	Pack Qty.	ITEM #
Female	¼"	¼" FPT	1	PC0900

FEMALE COUPLER
PC0900

Plugs — Industrial Interchange				
Type	Body Size	Size	Pack Qty.	ITEM #
Male	¼"	¼" MPT	2	PC0479
Male	¼"	⅜" MPT	2	PC0480
Female	¼"	¼" FPT	2	PC0477
Female	¼"	⅜" FPT	2	PC0478
Push-on Barb	¼"	¼" LHB	1	PC0576
Push-on Barb	¼"	⅜" LHB	1	PC0577

MALE PLUG
PC0479, PC0480

FEMALE PLUG
PC0477,
PC0478

PLUG (PUSH-ON LOCKING BARB)
PC0576, PC0577

Couplers — Industrial Interchange				
Type	Body Size	Size	Pack Qty.	ITEM #
Male	¼"	¼" MPT	1	PC0503
Male	¼"	⅜" MPT	1	PC0504
Female	¼"	¼" FPT	1	PC0501
Female	¼"	⅜" FPT	1	PC0502
Push-on Barb	¼"	¼" LHB	1	PC0505
Push-on Barb	¼"	⅜" LHB	1	PC0506

MALE COUPLER
PC0503, PC504

FEMALE COUPLER
PC0501, PC0502

COUPLER
(PUSH-ON LOCKING BARB)
PC0505, PC0506

Swivel Plugs & Couplers

• Allow easier access when working in corners and tight spaces
• Reduce fatigue
• Help prevent kinks and reduce stress on hose
• Provide strong and simple connection for pneumatic tools

Swivel Plugs — Industrial Interchange				
Type	Body Size	NPT Size	Pack Qty.	ITEM #
Male	¼"	¼" MPT	2	PC1323
Male	¼"	⅜" MPT	2	PC1325

MALE SWIVEL PLUG
PC1323, PC1325

Swivel Couplers — Industrial Interchange				
Type	Body Size	NPT Size	Pack Qty.	ITEM #
Female	¼"	¼" FPT	1	PC1328

FEMALE SWIVEL COUPLER
PC1328

Swivel Couplers — Universal				
Type	Body Size	NPT Size	Pack Qty.	ITEM #
Female	¼"	¼" FPT	1	PC1330

FEMALE SWIVEL COUPLER
PC1330

(FPT) - Female Pipe Thread
(MPT) - Male Pipe Thread
(LHB) - Locking Hose Barb, no clamp required when used with SENCO Quick Couple Hose.

74

ACCESSORIES

Air Hose Accessories

Splicer			
Description	Size	Pack Qty.	ITEM #
Push-On Barbed Hose Splicer	¼" LHB	2	PC0643

PUSH-ON BARBED HOSE SPLICER
PC0643

ProFlex Hose Fittings			
Description	Size	Pack Qty.	ITEM #
Brass Hose End	¼" MPT	1	PC0983
Brass Hose End and Splicer	¼" MPT	1	PC0987

BRASS HOSE END
PC0983

BRASS HOSE END & SPLICER
PC0987

Air Hose and Compressor Accessories

Tripod Manifold				
Description	Inlet Thread	Outlet Thread	Pack Qty.	ITEM #
3-Way Flat Manifold Industrial Interchange	¼" Plug	¼" Coupler	1	PC1138

3-WAY FLAT MANIFOLD
PC1138

Blow Gun			
Description	Inlet Thread	Pack Qty.	ITEM #
Air Blow Gun	¼" FPT	1	PC0489

(FPT) - Female Pipe Thread

AIR BLOW GUN
PC0489

Teflon® Thread Sealing Tape		
Description	Pack Qty.	ITEM #
½" x 260' Sealing Tape	1	PC0349

SEALING TAPE
PC0349

Regulators & Gauges

SENCO's assortment of filters and gauges are precision engineered to meet the demanding requirements of professional contractors. Be sure that your compressor is running at peak performance by using SENCO-certified replacement parts and accessories.

Air Regulation Accessories: Regulator with Gauge					
Description	Max PSI	Max Airflow	FPT Size	NPT Gauge	ITEM #
Mini Regulator with Gauge	250	14 SCFM	¼"	⅛"	PC0656
Regulator with Gauge	300	80 SCFM	⅜"	⅛"	PC0657
Back-Mount Pressure Gauge	160	—	—	⅛"	PC0057
Back-Mount Pressure Gauge	160	—	—	¼"	PC0051

MINI REGULATOR
WITH GAUGE
PC0656

REGULATOR
WITH GAUGE
PC0657

BACK-MOUNT
PRESSURE GAUGE
PC0057

BACK-MOUNT
PRESSURE GAUGE
PC0051

Oils & Lubricants

Oils and Lubricants				
Description	**Features**	**Size**	**Case Qty.**	**ITEM #**
Pneumatic Tool Oil (½ pt)	• Premium-grade oil with high-quality paraffin distillate stock • Contains a carefully balanced rust and oxidation inhibitor with an effective anti-foaming additive	8 oz	12	PC0101
Pneumatic Tool Oil (1 qt)	• Premium-grade oil with high-quality paraffin distillate stock • Contains a carefully balanced rust and oxidation inhibitor with an effective anti-foaming additive	32 oz	12	PC0102
Pneumatic Tool Oil (1 gal)	• Premium-grade oil with high-quality paraffin distillate stock • Contains a carefully balanced rust and oxidation inhibitor with an effective anti-foaming additive	128 oz	4	PC0103
Compressor Pump Oil (1 qt)	• Premium-grade oil with high-quality naphthenic distillate stock • Recommended for all oil-splash compressors • Protects against corrosion • Lubricates to extend part life	32 oz	12	PC0344
Moisture Shield Tool Lubricant (1 qt)	• For use in cold weather and/or high-moisture areas • Protects against corrosion • Lubricates to extend part life • Special additive to minimize exhaust fog	32 oz	12	PC1295
Tool Lubricant	• Protects against corrosion • Lubricates to extend part life • Special additive to minimize exhaust fog	4 oz	12	YB0123

PNEUMATIC TOOL OILS

½ pt
PC0101

1 qt
PC0102

1 gal
PC0103

COMPRESSOR PUMP OIL
PC0344

MOISTURE SHIELD TOOL LUBRICANT
PC1295

TOOL LUBRICANT
YB0123

Safety Glasses & Tool Belt Hooks

Safety Glasses		
Description	**Qty.**	**ITEM #**
Wrap-Around Safety Glasses*	10-Case	PC1166

*Filters 99% of UVA and UVB rays. Meets or exceeds ANSI Z87.1 and CE EN 166 safety standards. For indoor and outdoor use.

WRAP AROUND
PC1166

Tool Belt Hooks			
Description	**Size**	**Qty.**	**ITEM #**
Attaches to ¼" Air Fitting on Tool	Standard	1	PC0350
Attaches to ¼" Air Fitting on Tool	X-Wide	1	PC0629
Attaches to ⅜" Air Fitting on Tool	Standard	1	PC0351
Attaches to ⅜" Air Fitting on Tool	X-Wide	1	PC0630

BELT HOOK
PC0350

BELT HOOK
PC0629

BELT HOOK
PC0351

BELT HOOK
PC0630

Li-Ion Batteries

For use with 18V Li-Ion DuraSpin and SENCO FUSION tools		
18V Li-Ion Battery 1.5 amp hour	**For use with**	
VB0155	DS222-18V DS225-18V DS322-18V F-15XP F-16XP F-18XP F-LXP F-35XP* F-35FRHXP*	• 1.5 amp hour • High-quality reliable cells • Longer storage life • Charges to 80% in 15 minutes
18V Li-Ion Battery 3.0 amp hour		
VB0190		• 3.0 amp hour • State of the art 21700 cells • Longer storage life • Drives more than 2X the fasteners as VB0155 (above)

*For optimal performance only use the VB0190 battery with the F-35XP and F-35FRHXP

Battery Chargers

For use with SENCO batteries		
Battery Charger	**For use with**	
VB0156	VB0155 VB0190**	• 3 amp quick charger • Battery charge indicators display charge status of your battery
Battery Charger	**For use with**	
VB0189	VB0155 VB0190	• 5 amp quick charger • Upright design is ideal for wall mounting

**The VB0189 charger is recommended for the VB0190 battery; using the VB0156 charger will result in longer charge times.

Replacement No-Mar Pads

Replacement No-Mar Pads Fit	ITEM #
AF25, CF25	HF0064
AF41, CF41	HF0079
FIP11	HC0463
FIP15, FIP18	HC0506
FIP15Mg, FIP18Mg	HC0571
FIP23SXP, 23LXP, 21LXP	HC0729
FIP25XP	HF0064
FIP32*	HC0396
FIP32*	HC0401
FIP41XP, FIP42XP	HF0079
FN55AX	HF0113
FN65DA	HF0110
FP600-650 SERIES	HF0046, HC0253
FP601, FP602, FP651, FP652	HA0170
FP700 SERIES	HF0046, HC0253

One pad per pack.
*Refer to parts chart to identify desired safety element design.

Replacement No-Mar Pads Fit	ITEM #
GT65DA	HC0626
GT65RHA	HC0625
GT90CH	HA0200
GT90FRH	HA0201
SCN49	HC0536
SFN30, SFN40, SFNI	HF0079
SLS15, SLS18	HC0507
SLS15Mg, SLS18Mg	HC0572
SLS20, SLS20XP (K, L & R CROWNS)	HF0028
SLS20, SLS20XP (M CROWN)	HF0029
SLS25-L, SLS25XP-L	HF0028

One pad per pack.

Maintaining Your Tools

SENCO repair kits are designed to provide the parts normally needed to properly maintain and service your SENCO tools.

Tool Model	Description	Item Code
FinishPro15, 18, 2N1	Repair Kit	YK0393
FinishPro15Mg, 18Mg	Repair Kit	YK0780
FinishPro16XP	Repair Kit A	YK0884
FinishPro16XP	Repair Kit B	YK0885
FinishPro18BMg	Repair Kit	YK0868
FinishPro21LXP, 23LXP	Repair Kit	YK0855
FinishPro23SXP	Repair Kit	YK0854
FinishPro25XP	Firing System Kit	YK0281
FinishPro25XP	Piston Stop Kit	YK0282
FinishPro32	Repair Kit	YK0394
FinishPro33Mg	Repair Kit	YK0787
FinishPro35Mg	Repair Kit	YK0788
FinishPro41XP, 42XP	Firing System Kit	YK0361
FinishPro41XP, 42XP	Piston Stop Kit	YK0362
FramePro601, 602, 651, 652	Repair Kit	YK0360
FramePro XP 701, 752, 702, 752	Firing System Kit	YK0243
FramePro XP 701, 752, 702, 752	Piston Stop Kit	YK0244
HN150, HN250	Repair Kit	BA0158
JoistPro150XP	Firing System Kit	YK0823
JoistPro150XP	Piston Stop Kit	YK0824
JoistPro250XP	Firing System Kit	YK0825
JoistPro250XP	Piston Stop Kit	YK0826
JoistPro250XP	Safety Upgrade Kit	YK0869
LS1XP	Repair Kit	YK0858
MW	Repair Kit	YK0371
NS20XP	Firing System Kit	YK0840
NS20XP	Piston Stop Kit	YK0841
NS20XP	Siding Safety Kit	HC0788
NS20BXP	Firing System Kit	YK0838
NS20BXP	Piston Stop Kit	YK0839
PAL57FXP	Repair Kit	YK0446
PS15XP, PS15RXP	Repair Kit	YK0784
PS15XP, PS15RXP	Repair Kit	YK0818
PS15XP, PS15RXP	Block Out Kit	YK883
PS15XP	Retrofit Kit – Solid Safety	YJ0044
PS15RXP	Retrofit Kit – Solid Safety	YJ0049
PS20XP	Repair Kit	YK0783
RoofPro™ 455XP	Firing System Kit	YK0424
RoofPro™ 445XP	Repair Kit	YK0865
RoofPro™ 445XP	Wear Guard Kit	YKO870
RoofPro™ 445XP	Gate Repair Kit	YK0871
RoofPro™ 455XP	Piston Stop Kit	YK0425
RoofPro™ 450XP	Repair Kit	YK0426
SC 1	Repair Kit	YK0370
SC 2	Repair Kit	YK0371
SCN48	Repair Kit	YK0769
SCN49	Repair Kit	YK0771
SCN60, SCN65	Seal Kit	YK0366

Tool Model	Description	Item Code
SFN1, SKS, SPS	Repair Kit	YK0376
SFN1, SKS, SPS	Retrofit Kit	YJ0035
SFN30	Repair Kit	YK0368
SFT10XP, SFT10XP D/L, SFT10XP LN	Piston Stop Kit	YK0802
SFT10XP, SFT10XP D/L, SFT10XP LN	Firing System Kit	YK0803
SFT10XP (AUTO)	Firing System Kit	YK0804
SFT10XP (AUTO D/L)	Firing System Kit	YK0804
SFT10XP (AUTO D/L)	Piston Stop Kit	YK0802
SFN1, SKSXP, SPS	Firing System Kit	YK0804
SFW09	Repair Kit	YK0775
SFW10XP	Piston Stop Kit	YK0321
SFW10XP	Firing System Kit	YK0322
SLP20	Repair Kit	YK0373
SLS15, SLS18	Repair Kit	YK0393
SLS15Mg, SLS18Mg	Repair Kit	YK0780
SLS20XP	Repair Kit	YK0372
SLS25XP	Piston Stop Kit	YK0291
SLS25XP	Firing System Kit	YK0359
SLS150Mg	Repair Kit	YK0852
SCP40XP	Firing System Kit	YK0444
SCP40XP	Piston Stop Kit	YK0445
SN901/902XP, FP325/325FRHXP	Firing System Kit	YK0444
SN901/902XP, FP325/325FRHXP	Piston Stop Kit	YK0445
SN951XP, SN952XP	Firing System Kit	YK0444
SN951XP, SN952XP	Piston Stop Kit	YK0768
SNS40	Repair Kit	YK0374
SNS41	Repair Kit	YK0423
SNS41 (Retrofit Kit)	Cap/Firing Valve	YJ0034
SNS41	Driver/Back Plate Upgrade	YK0794
SNS44XP	Firing System Kit	YK0421
SNS44XP	Piston Stop Kit	YK0422
SNS44XP	Driver/Back Plate Upgrade	YK0793
SNS45XP	Piston Stop Kit	YK0231
SNS50XP, SQS55XP	Seal Kit	YK0375
SNS200XP-BST	Firing System Kit	YK0838
SNS200XP-BST	Piston Stop Kit	YK0839
SNS200XP-BST	Wider Driver Kit	YK0873
SNS200XP	Firing System Kit	YK0840
SNS200XP	Piston Stop Kit	YK0841
SNS200XP	Block-Out Kit	YK0850
SNS200XP	Wider Driver Kit	YK0872
SNS200XP	Siding Safety Kit	HC0748
TN11G1	Repair Kit	YK0888
TN11L1, TN21L1	Repair Kit	YK0889
WC200XP	Piston Stop Kit	YK0784
WC200XP	Repair Kit	YK0783
WC200XP	Block-Out Kit	YK0786
WC200XP	Retrofit Kit - Solid Safety	YJ0037

Download SENCO tool parts charts at www.senco.com to see a complete list of available individual parts.

GUIDE TO CORROSION RESISTANT FASTENERS

BRIGHT BASIC

Bright Basic fasteners are an uncoated steel, which is commonly used in applications where corrosion protection is not required such as interior framing, finish and trim. These fasteners are not recommended for use in treated lumber or exterior applications.

GOOD CORROSION RESISTANCE

ELECTRO GALVANIZED

Electro Galvanized fasteners have a thin layer of zinc coating that helps corrision resistance in mild weather conditions and in areas with lower humidity. Because of its minimal protective properties these fasteners are recommended for interior use in areas such as kitchens and bathrooms.

GOOD CORROSION RESISTANCE

HOT DIPPED GALVANIZED

Hot Dipped Galvanized nails have one ounce per square foot of zinc coating. The zinc coating on the nail acts as a barrier between the base steel and the elements, slowing the corrosion process. Ideal for preservative-treated wood and most exterior applications.

BETTER CORROSION RESISTANCE

304 STAINLESS STEEL

304 Stainless Steel contains 18% chromium and 8% nickel among other elements, making it resist most oxidizing acids and rust. An excellent choice for all types of environments and woods including exotic woods, cedar or redwood.
Recommended use: Exposure to wet conditions regularly and more than 5 miles away from a body of water.

BEST CORROSION RESISTANCE

BOX, CARTON & PALLET QUANTITIES – FASTENERS

Nails

Item Code	Boxes Per Carton	Boxes Per Skid
A100509	5	900
A100629	5	900
A100759	5	900
A101009	5	900
A101259	5	900
A101379	5	900
A101509	5	900
A102009	5	900
A109809	5	900
A109909	5	900
A201009	5	700
A201259	5	700
A201509	5	700
A202009	5	700
A209809	5	700
A209909	5	700
A301500	5	480
A301750	5	480
A302000	5	480
A302009	5	480
A302500	5	480
A302509	5	480
A402009	5	480
AX10EAA	16	480
AX11EAA	16	480
AX13EAA	10	300
AX15EAA	10	300
AX17EAA	8	240
AX18EAA	8	240
AX19EAA	6	180
AX21EAAN	6	180
AX22EAAN	6	180
AY10EAA	16	480
AY11EAA	16	480
AY13EAA	10	300
AZ08EAA	32	960
AZ11EAA	24	720
AZ13EAA	16	480
BD17APBC	N/A*	24
BE23AABF	N/A*	45
BG17AAAQ	N/A*	40
BG18AAAQ	N/A*	40
BK21BPBFN	N/A*	35
BK23BPBFN	N/A*	35
BK25BPBFN	N/A*	35
BL21APBF	N/A*	45
BT21APBF	N/A*	45
CZ08EAAN	N/A*	140
CZ10EAA	24	1440
CZ10EAAN	N/A*	140
CZ11EAA	24	1152
CZ11EAAN	N/A*	140
CZ13EAA	12	720
CZ15EAA	12	720
CZ16EAA	12	720
CZ17EAA	12	720
CZ21EAA	12	576
DA13EPBN	5	200
DA15AIA	5	200
DA15EABN	5	200
DA15EPBN	5	200
DA17AIA	5	200
DA17EABN	5	200
DA17EPBN	5	200
DA19AIA	4	160
DA19EABN	4	160
DA19EPBN	4	160
DA21EABN	4	160
DA21EGBN	N/A*	90
DA21EPBN	4	160
DA23EPBN	3	120

Nails (cont.)

Item Code	Boxes Per Carton	Boxes Per Skid
DA25EAB	3	120
DA25EGB	N/A*	80
DA25EPB	3	120
ED23AABH	N/A*	60
EJ21ADBH	N/A*	40
EJ23ADBH	N/A*	40
EJ23ASBC	N/A*	24
EL19AGBH	N/A*	60
EL19ASBH	N/A*	60
EL20AABH	N/A*	60
EL20ASBH	N/A*	60
EL21AGBH	N/A*	60
EL21ASBH	N/A*	60
EL23AABH	N/A*	60
EL23AGBH	N/A*	60
EL23ASBC	N/A*	24
EL23ASBH	N/A*	60
G524APBXN	N/A*	72
G524ASBXN	N/A*	72
G621ASBXN	N/A*	80
G624APBXN	N/A*	72
G624ASBXN	N/A*	72
GC21APBX	N/A*	80
GC23AHAK	N/A*	80
GC24APBX	N/A*	72
GC24ASBX	N/A*	72
GC25APBX	N/A*	72
GD21AABF	N/A*	40
GD21APBF	N/A*	40
GD24APBSN	N/A*	48
GD24ASBS	N/A*	45
GD25AABF	N/A*	40
GD25AABSN	N/A*	48
GD25APBF	N/A*	40
GD25APBSN	N/A*	48
GE21APAX	N/A*	80
GE21ASBX	N/A*	80
GE24AGBK	N/A*	80
GE24APBX	N/A*	72
GE24ASBX	N/A*	72
GL21APBF	N/A*	40
GL21APBSN	N/A*	48
GL21ASBS	N/A*	45
GL24AABSN	N/A*	48
GL24AGBF	N/A*	24
GL24AGBS	N/A*	72
GL24APBF	N/A*	40
GL24APBSN	N/A*	48
GL24ASBF	N/A*	40
GL24ASBS	N/A*	45
GT24APBF	N/A*	40
H527APBXN	N/A*	48
H528APBXN	N/A*	48
H627APBXN	N/A*	48
H627ASBXN	N/A*	48
HC27APBX	N/A*	48
HC27ASBX	N/A*	48
HC28APBX	N/A*	48
HD27APBF	N/A*	40
HD27APBSN	N/A*	48
HE27ASBX	N/A*	48
HF27EDB	N/A*	80
HF27EPAK	N/A*	40
HJ25ADBS	N/A*	45
HK27APBFN	N/A*	35
HL27AGBS	N/A*	54
HL27ASBF	N/A*	40
HL27ASBS	N/A*	40
HR22APAF	N/A*	40
HR74APAF	N/A*	40
K525APBXN	N/A*	72

Nails (cont.)

Item Code	Boxes Per Carton	Boxes Per Skid
K527APBXN	N/A*	48
K527APBXR	N/A*	80
K527ASBXN	N/A*	48
K528APBXN	N/A*	48
K528APBXR	N/A*	80
K528ASBXN	N/A*	48
K529APBXN	N/A*	48
K627ASBXN	N/A*	48
K628APBXN	N/A*	48
K628ASBXN	N/A*	48
K629ASBXN	N/A*	48
KC27AGBK	N/A*	80
KC27APBX	N/A*	48
KC27ASBX	N/A*	48
KC28AGBK	N/A*	80
KC28APBX	N/A*	48
KC28ASBX	N/A*	48
KC29APBX	N/A*	48
KC29ASBX	N/A*	48
KC31APBX	N/A*	40
KD25AABS	N/A*	45
KD25APBF	N/A*	40
KD25APBSN	N/A*	48
KD27APBF	N/A*	40
KD27APBSN	N/A*	48
KD27ASBF	N/A*	24
KD27ASBS	N/A*	40
KD28AGBS	N/A*	54
KD28APBF	N/A*	40
KD28APBSN	N/A*	48
KD28ASBF	N/A*	24
KD28ASBS	N/A*	40
KD29APBF	N/A*	40
KD29APBSN	N/A*	48
KD29ASBS	N/A*	40
KJ17AEBD	N/A*	100
KJ17AHBD	3	900
KT25APBF	N/A*	40
LC29APBX	N/A*	48
M001000	20	960
M001001	16	768
M001002	6	480
M001003	6	480
M001004	6	384
M001005	6	384
M001007	6	288
M002261	N/A*	100
M002262	N/A*	100
M002263	N/A*	100
M002264	N/A*	100
M002265	N/A*	100
M002266	N/A*	100
M003011	N/A*	24
M003101	N/A*	56
M003103	N/A*	56
M003104	N/A*	48
M003105	N/A*	40
M003106	N/A*	40
MD17AJBDN	N/A*	96
MD17AQBD	N/A*	96
MD25AHBD	N/A*	100
MD25AJBDN	N/A*	96
MD25AQBDN	N/A*	96
MD27APBSN	N/A*	36
MD28APBSN	N/A*	36
MD34APBF	N/A*	36
ND25AJBDN	N/A*	96
ND25AQBDN	N/A*	96
RW17BPE	10	510
RW19BPE	10	510
RW21BGE	10	510

Nails (cont.)

Item Code	Boxes Per Carton	Boxes Per Skid
RW21BPE	10	510
SE15APB	N/A*	40
SE15APBH	N/A*	40
SE17APBH	N/A*	40
SE19APB	N/A*	40
W3050YXS	5	250
W3075YXC	5	250
W3100YXC	5	250
W3125YXC	5	250
W3150YXC	5	250
ZX10EAA	12	720
ZX13EAA	12	576
ZX16EAA	10	360
ZX18EAA	10	360
ZX21EAA	10	240

Staples

Item Code	Boxes Per Carton	Boxes Per Skid
A04BAAN	48	1152
A06BABN	6	216
A06BABP	8	192
A08BAB	12	288
A08BABP	8	192
A800629	5	600
A800759	5	600
A801009	5	600
A801259	5	600
A801509	5	600
A809909	5	600
B04BAAPN	8	192
B06BAAP	4	96
B08BAAP	4	96
C02BAAPN	8	192
C03BAAPN	8	192
C03BGAN	8	272
C04BAAP	8	192
C04BGAN	8	272
C05BAAPN	8	192
C06BAAP	4	96
C06BGA	20	480
C06BHA	20	640
C07BAAPN	4	96
C08BAAP	4	96
C10BAAP	4	96
D10BABN	6	216
D10BABPN	8	192
E06BAA	20	640
E08BAA	16	512
E10BAA	25	800
F04BAAN	12	384
F04BAAP	8	192
F05BAAP	4	96
F06BAA	10	300
F06BAAP	4	96
F06BGA	10	300
F08BAAN	8	240
F08BAAP	4	96
G04BAAN	24	480
G06BABN	25	800
G08BAB	20	640
H06BAA	20	480
J06BAA	12	216
J08BAAN	9	288
J10BAAN	8	160
K11BAB	6	240
K12BAB	10	400
K13BABN	12	384

*Product is shipped in the item box, not in a master shipping carton.

Staples (cont.)

Item Code	Boxes Per Carton	Boxes Per Skid
L06BAB	10	360
L07BABP	N/A*	112
L08BAB	8	288
L10BABN	12	432
L10BHA	12	432
L10HABN	12	432
L11BAB	10	360
L11BGA	10	360
L11BRB	10	360
L11HAB	10	360
L11HBB	10	180
L12BAB	10	360
L12BQB	10	360
L13BABN	8	288
L13BRBN	8	288
L13BRBP	N/A*	36
L13HABN	8	288
L14BAB	6	216
L14BGA	6	216
L14BRB	6	216
L15BAB	6	216
L15BRB	6	216
L17BAB	6	216
M004092	N/A*	180
M06BABN	7	224
M08BAB	6	192
M10BABN	9	288
M10BRBN	9	288
M11BABN	8	256
M11BRBN	8	256
M12BAB	6	192
M13BAB	6	192
M13BRB	6	192
M15BAB	N/A*	60
M17BAB	N/A*	48
N08BABN	6	192
N08BBBN	6	192
N08FBB	6	192
N10BAB	6	192
N11BAB	6	192
N11BRB	6	192
N11FBB	6	192
N12BABN	6	192
N12FABN	5	160
N13BAB	4	128
N13BRB	4	128
N13FAB	4	128
N14BAB	N/A*	56
N14BRB	N/A*	56
N15BAB	N/A*	56
N15BGB	N/A*	165
N15BRB	N/A*	56
N15FAB	N/A*	56
N16BAB	N/A*	56
N16BRB	N/A*	56
N17BAB	N/A*	48
N17BGB	N/A*	165
N17BRB	N/A*	48
N18BAB	N/A*	48
N18BRB	N/A*	48
N19BAB	N/A*	40
N19BGBN	N/A*	130
N19BRB	N/A*	40
N21BAB	N/A*	40
N21BGBN	N/A*	120
N21BRB	N/A*	40
O15BRBBN	N/A*	56
O16BRBBN	N/A*	70
O17BRBBN	N/A*	56
O18BRBBN	N/A*	56
O19BRBBN	N/A*	56

Staples (cont.)

Item Code	Boxes Per Carton	Boxes Per Skid
P06BAA	N/A*	60
P08BABT	N/A*	60
P10BAB	N/A*	60
P10BPE	N/A*	60
P10FAB	N/A*	60
P11BAB	N/A*	50
P11BPE	N/A*	50
P12BAB	N/A*	40
P13BAB	N/A*	40
P13BGBN	N/A*	60
P13BPE	N/A*	40
P15BAB	N/A*	30
P15BPE	N/A*	30
P17BAB	N/A*	30
P19BAB	N/A*	40
P21BAB	N/A*	40
Q15BAB	N/A*	64
Q17BAB	N/A*	64
Q17BRB	N/A*	64
Q19BAB	N/A*	64
Q19BGBN	N/A*	130
Q19BRB	N/A*	64
Q21BAB	N/A*	56
Q21BRB	N/A*	56
Q23BRB	N/A*	48
Q25BAB	N/A*	48
Q25BRB	N/A*	48
R08BAB	12	384
R10BAB	12	480
R11BAB	12	480
R13BAB	12	480
W10BAB	10	400

Staples — Specialty

Item Code	Boxes Per Carton	Boxes Per Skid
X04NRA	N/A*	224
X06NRA	N/A*	224
X08NRA	N/A*	224
Y05BFA	10	320
Y07BFA	8	256
Y09BFAN	6	180

Screws

Item Code	Boxes Per Carton	Boxes Per Skid
06A125P	6	144
06A125PB	N/A*	72
06A162P	6	144
06A162PB	N/A*	72
06A162W	6	144
06B125P	6	144
06B125PB	N/A*	72
06B162P	6	144
06B162PB	N/A*	72
06B200PB	N/A*	48
06C125CB	N/A*	72
06C125PB	N/A*	72
06C125WK	6	240
06C162CB	N/A*	72
06C162PB	N/A*	72
06C162WK	6	240
06C200CB	N/A*	48
06C200PB	N/A*	48
07A200P	6	144

Screws (cont.)

Item Code	Boxes Per Carton	Boxes Per Skid
07Q100PB	N/A*	72
07Q125PBQ	N/A*	72
08A250PK	6	192
08C300WK	6	144
08D175W	6	144
08D200W	6	144
08D250S	6	144
08D250W	6	144
08D250WK	6	192
08D300W	6	144
08D300WK	6	144
08F150Y	6	144
08F150YTK	6	240
08F175Y	6	144
08F200Y	6	144
08F200YBTHSS	N/A*	48
08F200YTK	6	192
08F250Y	6	144
08F250YK	6	192
08F300Y	6	144
08G100CBWFDS	N/A*	72
08G150CTLDSS	6	144
08G162CTWFWS	6	144
08G200CKLFPS	6	192
08G200WTWFWS	6	144
08G250WWK	6	192
08L125CBLCTS	N/A*	72
08L175YB	N/A*	72
08M050CTRFDP	6	144
08M050CTRFSP	6	144
08M100CBPDSS	N/A*	72
08R250W	6	144
08R300W	6	144
08S250W003	6	144
08S250W497	6	144
08S250W592	6	144
08T125W	6	144
08T150WBWFDS	N/A*	72
08T200W	6	144
08X125CBACTS	N/A*	72
08X125CKADDS	6	240
08X200CKADDS	6	192
09D300S	6	144
10G125CBWFDS	N/A*	72
10G162CTWFWS	6	144
10M075CDK	6	240
10M075CSK	6	240
10M075CTMFDS	6	144
10M075YKFT4X	6	240
10M075YLFT4X	N/A*	48
10M075YTFFDX	6	144
10M100CKMFDS	6	240
12G175YKLFAX	6	240
12G200YKLFCX	6	192
12G250YKLFCX	6	192
12M087YKFF4X	6	240
12M100YKFF3X	6	240

*Product is shipped in the item box, not in a master shipping carton.

Tools:
DuraSpin (Cordless)

Model	Item #	Page
DS222-18V - 2" Cordless 18v Li-Ion 2500 RPM	10B0001N	3
DS225-18V - 2" Cordless 18v Li-Ion 5000 RPM	10A0001N	3
DS322-18V - 3" Cordless 18v Li-Ion 2500 RPM	10C0001N	3

Tools:
DuraSpin (Corded)

Model	Item #	Page
DS242-AC - 2" Corded 2500 RPM	10E0001N	4
DS245-AC - 2" Corded 5000 RPM	10D0001N	4
DS342-AC - 3" Corded 2500 RPM	10F0001N	4
SG2510 - High-Performance 2500 RPM Screwdriver	6X0002N	7
SG4100 - High-Performance 4000 RPM Screwdriver	6X0004N	7

Tools:
DuraSpin (Attachments)

Model	Item #	Page
DS230-D1 - 2" Auto-Feed Screwdriver Attachment	9Z0011N	5
DS230-D2 - 2" Auto-Feed Screwdriver Attachment	9Z0012N	5
DS230-M1 - 2" Auto-Feed Screwdriver Attachment	9Z0021N	5
DS230-S1 - 2" Auto-Feed Screwdriver Attachment	9Z0001N	5
DS530-D1 - 3" Auto-Feed Screwdriver Attachment	10X0012N	6
DS530-M1 - 3" Auto-Feed Screwdriver Attachment	10X0022N	6
DS530-S1 - 3" Auto-Feed Screwdriver Attachment	10X0002N	6

Tools:
DuraSpin (Attachment Kits)

Model	Item #	Page
DS532-AC - 3" Attachment Kit with 2500 RPM Screwdriver	10X0003N	6
DS534-AC - 3" Auto-Feed Screwdriver Attachment	10X0013N	6

Tools:
Pneumatic

Model	Item #	Page
A11 - 7/16" Crown 3/8" Hammer Stapler	PC0700	50
A20 Hand Nailer - 2" – 7" Bulk Nailer	PC0781	35
BC58 - 1/2" Crown 5/8" Staple + 1" Cap	4A0001N	50
DFPXP - 20 GA. 1/2" Crown, 1/2" Staple Clinch Tool	8H0001N	56
F-15XP - 2 1/2" 15 GA. Cordless Pneumatic Finish Nailer	10L0001N	15
F-16XP - 2 1/2" 16 GA. Cordless Pneumatic Finish Nailer	10N0001N	15
F-18XP - 2 1/8" 18 GA. Cordless Pneumatic Brad Nailer	10M0001N	15
F-35FRHXP - Cordless Pneumatic Framing Nailer	10H0001N	31
F-35XP - Cordless Pneumatic Framing Nailer	10G0001N	31
F75LXP - 18 GA. 7/16" Crown, 5/8" Staple Clinch Tool	8J0002N	56
F75SXP - 18 GA. 7/16" Crown, 5/8" Staple Sisal Anvil	8J0001N	56
FinishPro®16XP - 2 1/2" Finish Nailer	9S0001N	18
FinishPro®18BMg - 2 1/8" Brad Nailer	9B0001N	17
FinishPro®18Mg - 2 1/8" Brad Nailer	1U0021N	17
FinishPro®25XP - 2 1/8" Brad Nailer	760102N	18
FinishPro®30XP - 2" Angled Finish Nailer	9P0002N	19
FinishPro®35Mg - 2 1/2" Angled Finish Nailer	6G0001N	19
FinishPro®42XP - 2 1/2" Angled Finish Nailer	4G0001N	19
F-LXP - 1 1/2" 18 GA. 1/4" Crown Cordless Pneumatic Finish Stapler	10Y0001N	15
FN81T1 - 3 1/2" Full Round Head Framing Nailer	FN81T1	32
FN91T1 - 3 1/2" Paper Tape Framing Nailer	FN91T1	32
FramePro®325FRHXP - 3 1/4" Full Round Head Framing Nailer	4H0101N	34
FramePro®325XP - 3 1/4" Paper Tape Framing Nailer	4Z0101N	33
FramePro®701XP - 3 1/2" Paper Tape Framing Nailer	2H0133N	33
FramePro®702XP - 3 1/2" Full Round Head Framing Nailer	2K0103N	34
FramePro®751XP - 3 1/2" Paper Tape Framing Nailer	2J0103N	33
FramePro®752XP - 3 1/2" Full Round Head Framing Nailer	2F0103N	34
JN91H1 - 1 1/2" Metal Connector Nailer	JN91H1	36

Tools:
Pneumatic (cont.)

Model	Item #	Page
JN91H2 - 1 1/2" Metal Connector Nailer	JN91H2	36
JN91P1 - 1 1/2"–2 1/2" Metal Connector Nailer	JN91P1	36
JN91P2 - 1 1/2"–2 1/2" Metal Connector Nailer	JN91P2	36
LS1XP - 1" Headless Brad Nailer	8N0001N	17
Mini Hand Nailer - 2"–3 1/2" Bulk Nailer	PC1195	35
NS20BXP - 7/16" Crown, Heavy Wire Stapler	9Y0001N	38, 62
NS20XP - 7/16" Crown, 2" Heavy Wire Stapler	9X0001N	38
PalletPro™100XP - 4" Coil Nailer (Special Order Tool)	5L0001N	55
PalletPro™130XP - 5 1/8" Coil Nailer (Special Order Tool)	5M0001N	55
PalletPro™57FXP - 2 1/4" Coil Nailer	4L0001N	55
PS15RXP - 1" Crown 1 1/2" Roofing Stapler	9U0001N	50
PS15XP - 1" Wide Crown, 1 1/2" Heavy Wire Stapler	9T0001N	37
PS20XP - 1" Wide Crown, 2" Heavy Wire Stapler	9W0001N	37
RoofPro™445XP - 1 3/4" Coil Nailer	8V0001N	49
SC1XP Senclamp® - 7/16" Crown, 9/16" Senclamp® Fastener	220101N	22
SC2 Sencor® - 1" Crown, 1/2" Corrugated Stapler	470001N	22
SCN60XP - 2 3/4" Coil Nailer	520101N	35
SCN65XP - 3 1/2" Coil Nailer (Flat Safety)	540101N	35
SCN65XP - 3 1/2" Coil Nailer (Toenail Safety)	540104N	35
SCP40XP - 1 1/2" Standard Pressure Pneumatic Concrete & Steel Pinner	7J0001N	37
SFT10XP 20 GA. E Wire - Standard	6S0031N	61
SFT10XP 20 GA. F Wire - Standard	6S0041N	61
SFT10XP 20 GA. G Wire - Standard	6S0051N	61
SFT10XP 22 GA C Wire - Standard	6S0021N	61
SFT10XP 22 GA. A/D Wire - Auto	6S0101N	61
SFT10XP 22 GA. A/D Wire - Standard	6S0001N	61
SFT10XP 22 GA. B Wire - Standard	6S0011N	61
SFT10XP 22 GA. C Wire - Auto	6S0121N	61
SFT10XP Dbl. Length Mag. 20 GA. F Wire - Auto	6S0341N	61
SFT10XP Dbl. Length Mag. 20 GA. G Wire - Standard	6S0251N	61
SFT10XP Dbl. Length Mag. 20 GA. H Wire - Auto	6S0361N	61
SFT10XP Dbl. Length Mag. 22 GA. B Wire - Auto	6S0311N	61
SFT10XP Dbl. Length Mag. 22 GA. B Wire - Standard	6S0211N	61
SFT10XP Dbl. Length Mag. 22 GA. C Wire - Auto	6S0321N	61
SFT10XP Dbl. Length Mag. 22 GA. C Wire - Standard	6S0221N	61
SFT10XP Long Nose 22 GA. C Wire - Standard	6S0421N	61
SFW09 - 3/8" Crown, 5/8" Fine Wire Stapler	4C0001N	62
SHF200 - 2" Pneumatic Mallet Actuated Flooring Cleat Nailer	8D0001N	67
SKSXP-L Stapler	300120N	20
SKSXP-M Stapler	300152N	20
SKSXP-N Stapler	300184N	20
SLP20XP - 1 5/8" Brad Nailer	430101N	18
SLS150MG - 1/4" Crown, 1 9/16" Medium Wire Stapler	8C0001N	21
SLS18MG - 1/4" Crown, 1 1/2" Medium Wire Stapler	1W0021N	21
SLS20XP-HF - 3/16" Crown, 1" Floor Stapler	490021N	67
SLS20XP-K Stapler	490101N	20
SLS20XP-L Stapler	490103N	20
SLS20XP-L Sencomatic Stapler	490015N	20
SLS20XP-L Stapler With Case	490105N	20
SLS20XP-M Stapler	490107N	20
SLS20XP-R Stapler	490111N	20
SLS25XP-L Stapler	820103N	20
SLS25XP-M Stapler	820107N	20
SN71P1 - 2 1/2" Coil Nailer	SN71P1	49
SNS41 - 7/16" Crown, 2" Heavy Wire Stapler	3L0003N	38
SQS55XP - 7/16" Crown, 2 1/2" Heavy Wire Stapler	660101N	38
TN11G1 - 1 3/8" Headless Pinner	TN11G1	16
TN11L1 - 2" Headless Pinner	TN11L1	16
TN21L1 - 2" Pinner	TN21L1	17

Tools:
Compressors & Kit

Model	Item #	Page
PC0947	PC0947	71
PC0968	PC0968	71
PC1010	PC1010	71
PC1010N	PC1010N	71
PC1131	PC1131	71
PC1280	PC1280	71

82

ITEM CODE INDEX

Accessories:
Pneumatic (cont.)

Item #	Page
PC0643	75
PC0656	75
PC0657	75
PC0900	74
PC0977	73
PC0978	73
PC0979	73
PC0983	75
PC0987	75
PC1138	75
PC1152	73
PC1166	76
PC1295	76
PC1319	73
PC1320	73
PC1321	73
PC1322	73
PC1323	74
PC1325	74
PC1328	74
PC1330	74
PC1337	73
PC1338	73
PC1339	73
PC1340	73
PC1341	73
SWM125B	37
YB0123	76
YJ0042	33
YJ0043	33
YJ0044	37
YJ0055	33

Accessories:
Battery & Charger Systems

Item #	Page
VB0155	13, 31, 77
VB0156	13, 31, 77
VB0189	13, 77
VB0190	13, 77

Accessories:
No-Mar Pads

Item #	Page
HA0170	77
HA0200	77
HA0201	77
HC0253	77
HC0396	77
HC0401	77
HC0463	77
HC0506	77
HC0507	77
HC0536	77
HC0571	77
HC0572	77
HC0625	77
HC0626	77
HC0729	77
HF0028	77
HF0029	77
HF0046	77
HF0064	77
HF0079	77
HF0110	77
HF0113	77

FINISH & WOODWORKING

15 GA	16 GA	18 GA	21 GA
Pg. 25	Pg. 24	Pg. 23-24	Pg. 23

23 GA	19 GA	18 GA	16 GA	SENCLAMP	SENCLAMP
Pg. 23	Pg. 26	Pg. 27–28	Pg. 28	Pg. 29	Pg. 29

FRAMING, SHEATHING & SUBFLOORS

34º Prohead	34º	20º	COIL	METAL	CONCRETE	15 GA	16 GA	17 GA
Pg. 39	Pg. 40	Pg. 41–42	Pg. 42–44	Pg. 45	Pg. 45	Pg. 47	Pg. 46–47	Pg. 46

ROOFING, SIDING & FENCING

ROOFING	16 GA WIDE CROWN	FELT CAP & STAPLE	20 GA	WIRE WELD	PLASTIC WOUND
Pg. 51-52	Pg. 53	Pg. 53	Pg. 53	Pg. 51-52	Pg. 51-52

FLOORING

CLEAT	19 GA
Pg. 68	Pg. 68

PALLETS & CRATING

15º SMOOTH	15º RING	15º SCREW	20 GA	18 GA
Pg. 57	Pg. 58	Pg. 59	Pg. 59	Pg. 59

UPHOLSTERY & FURNITURE

22 GA	21 GA	20 GA	17 GA	16 GA
Pg. 63	Pg. 63	Pg. 64	Pg. 65	Pg. 65

DURASPIN AUTO-FEED SCREW SYSTEMS

DRYWALL	WOOD/WOOD	WOOD/STEEL	UNDERLAYMENT	DECKS & DOCKS	METAL/METAL	LOW PROFILE FRAMING	SPECIALTY
Pg. 8	Pg. 8	Pg. 9	Pg. 9	Pg. 9–10	Pg. 10	Pg. 11	Pg. 11

HOT DIPPED GALVANIZED

34º	20º	15º COIL
Pg. 39, 40 & 45	Pg. 41–42	Pg. 43, 51, 52, 57, 58

304 STAINLESS STEEL

15 GA	34º	20º	15º COIL	15 GA
Pg. 25	Pg. 40	Pg. 41–42	Pg. 43, 52, 58	Pg. 47

16 GA	18 GA	20 GA	22 GA	#2 FLAT HEAD	CLEAT
Pg. 46, 47, 53, 65	Pg. 27	Pg. 64	Pg. 63	Pg. 9	Pg. 68

DS225-18V	DS222-18V	DS322-18V	DS245-AC	DS242-AC	DS342-AC
10A0001N	10B0001N	10C0001N	10D0001N	10E0001N	10F0001N
Pg. 3	Pg. 3	Pg. 3	Pg. 4	Pg. 4	Pg. 4

DS230-S1	DS230-M1	DS230-D1	DS230-D2
9Z0001N	9Z0021N	9Z0011N	9Z0012N
Pg. 5	Pg. 5	Pg. 5	Pg. 5

DS530 SERIES	DS532-AC	DS534-AC
10X0002N | 10X0012N | 10X0022N	10X0003N	10X0013N
Pg. 6	Pg. 6	Pg. 6

SG2510	SG4100
6X0002N	6X0004N
Pg. 7	Pg. 7

Fasteners: see pages 8 - 11

FINISH & WOODWORKING

F-18XP	F-16XP	F-15	F-LXP	TN11G1	TN11L1	TN21L1	LS1XP	FinishPro18Mg
10M0001N	10N00001N	10L00001N	10Y00001N	TN11G1	TN11L1	TN21L1	8N0001N	1U0021N
Pg. 15	Pg. 15	Pg. 15	Pg. 15	Pg. 16	Pg. 16	Pg. 17	Pg. 17	Pg. 17

FinishPro18BMg	SLP20XP	FinishPro25XP	FinishPro16XP	FinishPro30XP	FinishPro35Mg	FinishPro42XP
9B0001N	430101N	760102N	9S0001N	9P0002N	6G0001N	4G0001N
Pg. 17	Pg. 18	Pg. 18	Pg. 18	Pg. 19	Pg. 19	Pg. 19

SLS20XP	SLS25XP	SKSXP	SLS150Mg	SLS18Mg	SC1XP	SC2
SEE SPECIFICATIONS	SEE SPECIFICATIONS	SEE SPECIFICATIONS	8C0001N	1W0021N	220101N	470001N
Pg. 20	Pg. 20	Pg. 20	Pg. 21	Pg. 21	Pg. 22	Pg. 22

Fasteners: see pages 23–29

FRAMING, SHEATHING & SUBFLOORS

F-35XP	F-35FRHXP	FN91T	FN81T1	FramePro325XP	FramePro701XP	FramePro751XP	FramePro325FRHXP	FramePro702XP
10G0001N	10H0001N	FN91T	FN81T1	4Z0101N	2H0133N	2J0103N	4H0101N	#2K0103N
Pg. 31	Pg. 31	Pg. 32	Pg. 32	Pg. 33	Pg. 33	Pg. 33	Pg. 34	Pg. 34

FramePro752XP	SCN60XP	SCN65XP	Mini Hand Nailer	A20 Hand Nailer	JN91H1	JN91H2	JN91P1	JN91P2
2F0103N	520101N	540101N/540104N	PC1195	PC0781	JN91H1	JN91H2	JN91P1	#JN91P2
Pg. 34	Pg. 35	Pg. 35	Pg. 35	Pg. 35	Pg. 36	Pg. 36	Pg. 36	Pg. 36

Fasteners: see pages 39–45

SCP40XP	PS15XP	PS20XP	NS20XP	NS20BXP	SNS41	SQS55XP
7J0001N	9T0001N	9W0001N	9X0001N	9Y0001N	3L0003N	660101N
Pg. 37	Pg. 37	Pg. 37	Pg. 38	Pg. 38	Pg. 38	Pg. 38

Fasteners: see pages 45–47

ROOFING, SIDING & FENCING

RoofPro445XP	SN71P1	PS15RXP	BC58 Cap	A11 Hammer Stapler
8V0001N	SN71P1	9U0001N	4A0001N	PC0700
Pg. 49	Pg. 49	Pg. 50	Pg. 50	Pg. 50

Fasteners: see pages 51–53

PALLETS & CRATING

PalletPro57FXP	PalletPro100XP	PalletPro130XP	DFPXP	F75LXP	F75SXP
4L0001N	5L0001N	5M0001N	8H0001N	8J0002N	8J0001N
Pg. 55	Pg. 55	Pg. 55	Pg. 56	Pg. 56	Pg. 56

Fasteners: see pages 57–59

UPHOLSTERY & FURNITURE

SFT10XP, SFT10XP Double Length Magazine, SFT10XP Long Nose	SFW09	NS20BXP
SEE SPECIFICATIONS	4C0001N	9Y0001N
Pg. 61	Pg. 62	Pg. 62

Fasteners: see pages 63–65

FLOORING

SHF200	SLS20XP-HF
8D0001N	490021N
Pg. 67	Pg. 67

Fasteners: see page 68

SENCO TOOLS AT A GLANCE

AIR COMPRESSORS & KIT

PC1131	PC0968	PC1280	PC1010	PC1010N	PC0947
Pg. 71	Pg. 71	Pg. 71	Pg. 71	Pg. 71	Pg. 71

90

RETHINK
CORDLESS

FUSION CORDLESS
AIR-POWER TECHNOLOGY
True pneumatic performance with no ramp-up time and the power to drive into the hardest substrates, including solid oak

ALUMINUM DRIVE CYLINDER
Reduces weight and provides superior durability

BATTERY STATUS LIGHTS
Quickly indicates battery power level

TOOL-FREE DEPTH-OF-DRIVE
Quickly adjust the depth for consistent flush or countersunk drives

NARROW NOSE DESIGN
Improves line of sight, includes no mar pad to protect woodwork

SELECTABLE ACTUATION SWITCH
Easily and safely change from sequential to bump fire modes

FUSION™
TECHNOLOGY

KYOCERA

KYOCERA SENCO Industrial Tools, Inc.

Looking for more?

Contact Us
8450 Broadwell Road   Phone: 800.543.4596
Cincinnati, Ohio 45244   Fax: 800.543.3299

Visit Us
On the web for more information
SENCO.com

Find Us
Search for your closest SENCO dealer
SENCO.com/dealer-locator

Join Us
Join our loyalty & rewards program
SENCOPROteam.com

Watch Us
Check out all of our latest videos & product launches
▶ Youtube.com/SencoBrands

Follow Us
On Twitter & Facebook for the latest SENCO news
f y @SENCOBrands

SENCO®   MAKING HARD WORK EASIER